


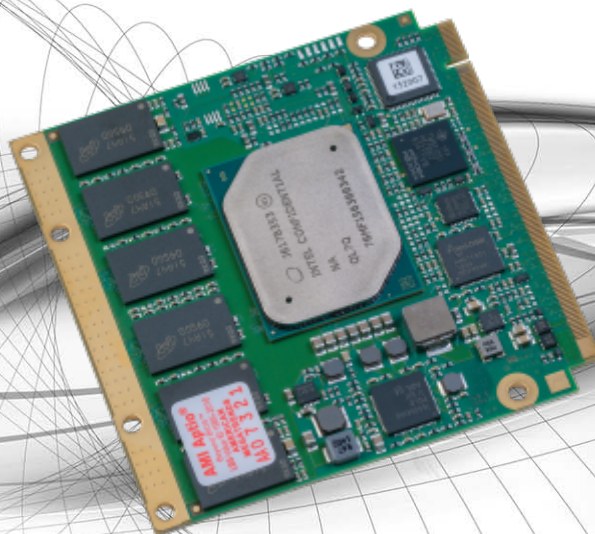

Engineering Leadership

MSC-LDK Manual
BSP 01011-ApolloLake V1.6.0
2020-08-03

Copyright Notice

Copyright © 2015-2020 by MSC Technologies GmbH. All rights reserved. Copying of this document, and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

Trademarks

All used product names, logos or trademarks are property of their respective owners.

Certification

MSC Technologies is certified according to DIN EN ISO 9001:2000 standards.

Audience

This guide is intended for software developers already familiar with Linux development.

Life-Cycle-Management

MSC Technologies GmbH products are developed and manufactured according to high quality standards. Our life-cycle-management assures long term availability through permanent product maintenance. Technically necessary changes and improvements are introduced if applicable. A product-change-notification and end-of-life management process assures early information of our customers.

Disclaimer

Although this document has been generated with the utmost care no warranty or liability for correctness or suitability for any particular purpose is implied. The information in this document is provided "as is" and is subject to change without notice.

Contents

1. History	9
1.1. Document	9
1.2. MSC-LDK	10
1.3. BSP 01011-ApolloLake	13
2. Introduction	14
2.1. Scope	14
2.2. Out Of Scope	14
2.3. Features	14
2.4. Conventions	14
2.5. Product Support	15
3. Getting Started	16
3.1. Requirements	16
3.2. Registration On The MSC Git Server	16
3.2.1. Creating An SSH Key	16
3.2.2. Configuring For HTTP proxies	17
4. Using MSC-LDK	18
4.1. Yocto/MSC-LDK Terms	18
4.2. Setup Optional Docker Container	18
4.3. Installation Of MSC-LDK	19
4.4. Directory Layout	19
4.4.1. MSC-LDK Layers	20
4.5. Installation Of MSC-LDK BSPs	22
4.5.1. 64bit Target Linux	22
4.6. BSP Aliases	22
4.7. Reduced Cleanup Time	22
4.8. Building Images	22
4.9. Traceable And Reproducible Images	23
4.10. Building Documentation	24
4.11. Image Types	24
4.11.1. Headless	24
4.11.2. LXQt	24
4.11.3. LXQt SDK	24
4.11.4. Sato	25
4.11.5. Sato SDK	25
4.12. Deploying Images To The Hardware	25
4.12.1. USB	25
4.12.2. SD Card	26
4.12.3. SATA	26
4.12.4. Other	26
4.13. Login	26
4.14. Enabled Services	27
4.15. Enhancing The Images	27
4.15.1. Finding New Packages	27
4.15.2. Adding Other Packages	27
4.15.3. Adding Own Layers	27
4.15.4. Network Configuration	28
4.15.5. Time Zone Setup	28
4.16. Using LXQt	29
4.17. ConnMan Configuration	29
4.17.1. Proxy Configuration For The otter-browser	32
4.18. Using Sato	33

4.19. Using The SDK Images	33
4.19.1. Setting Up The Development Host	33
4.19.2. Setting Up The Target	33
4.19.3. Building hello_world Manually	34
4.19.4. Building hello_world With CMake	34
4.19.5. Building Qt Based hello_world (Only In msc-image-lxqt-sdk)	34
4.20. German Keyboard Layouts	35
4.21. Bug Reporting	35
4.22. Hotfixes And Updating MSC-LDK	37
5. Package List	38
5.1. eapi-so	38
5.2. mscio	38
5.3. system-test-controller	38
A. Glossary	39
B. Bootloader Configuration	40
B.1. RAMDISK	40
C. X11/SATO Configuration	41
C.1. Screens	41
D. Graphic Demos	42
D.1. Graphic driver status	42
D.1.1. igt-gpu-tools	42
D.2. Video Acceleration	42
D.2.1. GStreamer	42
E. Supported Periphery	44
E.1. Audio	45
E.1.1. PulseAudio	45
E.1.2. ALSA	45
E.2. ECC Memory / EDAC	46
E.3. I2C	46
E.4. SD/MMC	47
E.5. USB Device Support	47
E.5.1. Setting Up USB Device Functionality	47
E.5.2. Testing Connection	47
E.5.3. Setting Up Serial Gadget	48
E.5.4. Setting Up Ethernet Gadget	48
E.5.5. Setting Up Mass/File Storage Gadget	48
E.6. UART	48
E.7. SPI	49
E.8. Powermanagement	49
E.8.1. Supported Capabilities	49
E.8.2. Suspend To RAM / S3	49
E.8.3. Wake-up Sources	49
E.9. Graphic Output	50
E.9.1. Dual Head Support	50
E.10. ACPI	50
E.11. Bluetooth	51
E.11.1. Enabling Bluetooth	51
E.12. WLAN	51
E.12.1. WLAN within msc-image-lxqt	51
F. MSC-IO	56
F.1. What Is MSC-IO?	56
F.2. mscio-setup	56
F.3. mscio-drivers	56
F.3.1. Hardware monitoring sensors	56
F.3.2. Backlight	57
F.3.3. Hardware Monitoring	57

F.3.4. Running Time	58
F.3.5. Watchdog	58
F.3.6. User GPIOs	59
F.3.7. NVRAM	60
F.3.8. Board Information	60
F.3.9. I2C Bus Identification	60
F.4. mscio-monitor	61
F.5. User Library	62
G. Troubleshooting	64
H. Tips And Tricks	65
H.1. Using A Standard Browser	65
H.1.1. Using The google-chrome Browser	65
H.2. Timekeeping	65
H.2.1. htpdate	65
I. Security	66
I.1. Introduction	66
I.2. Layer meta-security-isafw	66
I.3. Setting Up A Project	66
J. Real-time	67
J.1. What Is Real-time	67
J.2. Setup A BSP For Real-time Support	67
J.3. Analysis Of Real-time Behavior	67
J.3.1. Yocto Tracing And Profiling	67
J.3.2. Application List With Real-Time Priorities	71
J.4. Latency	71
J.4.1. cyclictst	72
J.4.2. Hardware Latency	72
J.4.3. Reducing Latency	72
J.4.4. Summary	74
K. Power Analysis	75
K.1. cpupower	75
K.2. powertop	75
L. Known Issues	77
L.1. I2C Kernel Errors	77
M. Links	78
N. License Overview	79

List of Figures

4.1. MSC-LDK Layers	20
4.2. LXQt - Mainwindow	29
4.3. Start ConnMan Property Editor	29
4.4. View ConnMan Properties	30
4.5. Manual IP Assignment	30
4.6. Otter Browser - Proxy Setup	32
4.7. Sato - Mainwindow	33
4.8. Sato - Groups	33
4.9. Sato - Selecting Running Apps	33
4.10. Bug Reporting - Start	35
4.11. Bug Reporting - Start	36
4.12. Bug Reporting - View	36
4.13. Bug Reporting - Create Zip	36
4.14. Bug Reporting - Save Zip	37
 F.1. mscio-monitor	 62
J.1. kernelshark - systemcalls	68
J.2. kernelshark - events	69
J.3. kernelshark - IRQs	70
 K.1. powertop overview	 76

List of Tables

4.1. MSC-LDK Directory Layout	20
4.2. MSC-LDK Layer Description	20
4.2. MSC-LDK Layer Description (continued)	21
4.3. User Accounts	27
 D.1. Intel IGT GPU Tools	 42
E.1. Supported periphery	44
F.1. mscio-drivers	56
G.1. Errors	64
K.1. CPU core states	75
 N.1. list of licenses used in this build	 79
N.2. License overview listing	80
N.2. License overview listing (continued)	81
N.2. License overview listing (continued)	82
N.2. License overview listing (continued)	83
N.2. License overview listing (continued)	84
N.2. License overview listing (continued)	85
N.2. License overview listing (continued)	86
N.2. License overview listing (continued)	87
N.2. License overview listing (continued)	88
N.2. License overview listing (continued)	89
N.2. License overview listing (continued)	90
N.2. License overview listing (continued)	91
N.2. License overview listing (continued)	92
N.2. License overview listing (continued)	93
N.2. License overview listing (continued)	94
N.2. License overview listing (continued)	95
N.2. License overview listing (continued)	96
N.2. License overview listing (continued)	97
N.2. License overview listing (continued)	98
N.2. License overview listing (continued)	99
N.2. License overview listing (continued)	100
N.2. License overview listing (continued)	101
N.2. License overview listing (continued)	102
N.2. License overview listing (continued)	103
N.2. License overview listing (continued)	104
N.2. License overview listing (continued)	105
N.2. License overview listing (continued)	106

Listings

msc-ldk-doc/bsp/yocto-output.txt	23
4.1. /etc/exports	33
4.2. hello_world.c	34
4.3. CMakeLists.txt	34
4.4. hello_world.cpp	34
4.5. hello_world.pro	35
 B.1. EFI/BOOT/grub.cfg	 40
 F.1. example.cpp	 62

1. History

1.1. Document

Revision	Changes
1.6.0	• Added chapter “Hardware monitoring sensors” • Added chapters “Enabling WiFi” and “Use the board as an access point” • Various fixes and cleanups
1.5.0	• Added chapter “I2C Bus Identification” • Added chapter “Reduced Cleanup Time” • Various fixes
1.4.0	• Removed chapter “Microsoft Azure”
1.3.0	• Added chapter “Power Analysis” • Added chapter “MSC-IO” • Added section “Setup Optional Docker Container”
1.2.0	• Added chapter “Microsoft Azure” • Added chapter “Real-Time” • Added chapter “Security” • Added chapter “Tips And Tricks” • Added section “ConnMan Configuration” • Updated section “Deploying Images To The Hardware” (new image type .wic) • Updated section “Enhancing The Images” • Updated section “Installation Of MSC-LDK”
1.1.0	• Added section “Traceable and Reproducible Images” • Added section “Hotfixed and Updating MSC-LDK” • Updated section “Installation of MSC-LDK”

Revision	Changes
1.0.0	• Added section “Using LXQt” • Added section “Using the SDK images” • Added section “Bug Reporting”

1.2. MSC-LDK

Revision	Changes
1.6.0	• Updated to yocto 3.0.1 (zeus) • Added layers meta-chrome-instead-of-otter and boot2qt • Added support for Ryzen and .iMX8 BSPs • "make install" copies .wic.bmap files for use with bmaptool
1.5.0	• Updated to yocto 2.7 (warrior) • Added layer-marvell • Removed meta-iot-cloud and meta-java dependencies for msc-image-lxqt • Added layer meta-bsp-arm-verification • Various improvements to build MSC-LDK BSPs in a Docker container • Various improvements to build feature branches of the BSPs
1.4.0	• Updated to yocto 2.5 (sumo) • Added layer-marvell • Removed meta-iot-cloud and meta-java dependencies for msc-image-lxqt

1.3.0

- Updated to yocto 2.4 (rocko)
- ApolloLake, Braswell, Skylake and Baytrail BSPs have been merged to IntelCombined BSP
- Added layers-debug for simplify kernel debugging
- Various fixes for building MSC-LDK when /bin/sh is dash instead of bash.
- Added experimental setup option `--with-tmp-image` to speed up cleanup of build directories
- Uses MSC-IO v3 to support ARM and setup MSC-IO and EAPI by ACPI BIOS entries
- zsh is used as login shell
- Four instead of one text consoles are available (access with Alt-F1...Alt-F4)
- On x86 the port for the serial console is guessed instead of hardcoded `/dev/ttyV0` which might be unavailable.
- Various tool changes and smaller bug fixes.

1.2.0

- Updated to yocto 2.2 (morty)
- All kernels are compiled with `CONFIG_DYNAMIC_DEBUG` for easier hardware bring-up
- X desktop is run as user "msc" instead of "root"
- Supporting real-time kernel
- LXQt is the preferred desktop environment instead of sato
- setup supports `--bsp-build-dir-name`
- setup supports `--layers-security`
- setup supports installation of 3rdparty layers
- Builds of different BSPs don't share the sstate-cache any longer
- MSC-LDK repository has been relocated

1.1.0

- Using setup.py instead of setup.sh
- setup.py supports configuration of the BSP exactly as a previous image has been built (traceable and reproducible images)
- Added certified azure libraries to standard image
- Supporting speaking names for BSPs, e.g. Q7-BT or Baytrail instead of C984
- Added fallback mirror server `ftp4.ebv.com`

Revision	Changes
1.0.0	• Updated to yocto 2.0 (jethro) • Added layer lxqt. • Simplified adding additional layers to the BSP builds. • Simplified adding new BSPs. • Moved recipes into own layers (e.g. meta-msc-ldk-core.git). • Added support for “develop” and feature branches of MSC-LDK development.

1.3. BSP 01011-ApolloLake

Revision	Changes
1.6.0	• Updated to kernel 5.2
1.5.0	• Updated to kernel 4.19 • Using igt-gpu-tools instead of intel-gpu-tools
1.4.0	• Updated to kernel 4.14
1.3.0	• Updated to kernel 4.12 • Added kernel option <code>sdhci_pci.disable_ddr50</code> • Removed kernel option <code>acpi_enforce_resources=lax</code> • I2C speed can be configured by the BIOS • Added EDAC support
1.2.0	Initial

2. Introduction

This document is intended to be used by developers creating or adapting Linux systems for MSC Technologies hardware with the MSC Linux Development Kit. The [MSC-LDK](#) provides an environment to create Linux kernels, bootloaders and root filesystems. It is based on the Yocto 3.0.1 project.

2.1. Scope

This document gives a hand in:

- Setup of the MSC-LDK.
- Building the Linux kernel, bootloaders and root filesystems.
- Deploying images to the hardware.
- Using the hardware features with Linux.

2.2. Out Of Scope

Detailed information about Yocto is not part of this document but available at:

<https://www.yoctoproject.org>.

2.3. Features

Features of the MSC-LDK are:

- Strong versioning. Every package is defined by it's version before downloading and building it.
- Support for different image installations (e.g. USB, SATA, RAMDISK).
- Support for different image types based on one configuration (headless or with GUI).
- Everything can be build from sources. But a cache is provided so already built packages can be reused.

2.4. Conventions

This section describes the conventions used in this manual.



Warning: This format is used to highlight material involving possibility of injury or equipment damage.



Caution: This format is used to highlight information that will help you prevent equipment failure or loss of data.



Note: This format is used to highlight information of importance or special interest.



Link: Look also at the given page or chapter for additional informations for the specific topic.

Typographical conventions:

`Courier New 9Pt` Screen text, user-typed command-line entries, or source code.

[Ctrl]+C Two or more keys that must be pressed simultaneously.

2.5. Product Support

MSC engineers and technicians are committed to provide support to our customers whenever needed.

If the information provided there does not solve your problem, please contact our Technical Support:

WWW: <http://www.msc-technologies.eu/de/support.html>

3. Getting Started

3.1. Requirements

- Linux x86 development host (32bit or 64bit).
- Ubuntu 18.04 (LTS), but other distributions up to Ubuntu 19.04 also work. Note that Yocto also allows Ubuntu 16.04 for zeus, but MSC discovered problems with some -native packages, e.g. zsh.
- Internet access for downloading packages (HTTP, FTP, Git and SSH).
- Registration on the MSC Git server.
- Lots of free disc space for the initial build (>128 GB).
- Python3 with 'pip' installed (at least Python v3.3).

3.2. Registration On The MSC Git Server

Downloading any files from the MSC Git server requires a registration on:

<http://www.msc-technologies.eu/register.html>.

Registered user may apply to specific Git repositories here by sending an email with their public SSH key and desired project name to <mailto:support@msc-technologies.eu>

3.2.1. Creating An SSH Key

If there is no SSH key already created (`~/.ssh/id_rsa.pub`), it can be generated like this. Press "Enter" on passphrase).

```
user@devhost:$ ssh-keygen -t rsa
Generating public/private rsa key pair.
Created directory '/home/user/.ssh'.
Enter passphrase (empty for no passphrase):
Enter same passphrase again:
Your identification has been saved in /home/user/.ssh/id_rsa.
Your public key has been saved in /home/user/.ssh/id_rsa.pub.
The key fingerprint is:
f3:f0:17:08:58:96:25:f4:bb:c1:60:f4:61:20:c8:b3 user@host
The key's randomart image is:
+--[ RSA 2048 ]-----+
|      . . . B + +      |
|      + * . = .        |
|      o . + o          |
|      E . + o          |
|      S = .            |
|      = o .            |
|      + .              |
|      .                 |
|                         |
```

Share the public key in `~/.ssh/id_rsa.pub` with MSC during Git registration.



The private key `~/.ssh/id_rsa` should never be shared with somebody else.



The SSH key must not have a passphrase. It will be used in background communication and therefore there is no possibility to enter the passphrase. Trying to fetch repositories from the MSC Public GIT Server would fail with no hint that the passphrase is missing.

3.2.2. Configuring For HTTP proxies

Some source files will be downloaded from HTTP servers. If a proxy must be used, two environment variables have to be set.

```
export http_proxy=http://my-proxy:3128  
export https_proxy=http://my-proxy:3128
```

4. Using MSC-LDK

4.1. Yocto/MSK-LDK Terms

Yocto and therefore [MSC-LDK](#) uses a sophisticated approach to generate Linux images.

- A *target* is the hardware or CPU module on which the generated Linux software is to be run.
- An *image* contains all the files necessary for execution by the targeted hardware, e.g. the Linux kernel and the root filesystem.
- Software that is part of a Linux image is called a *package*.
- A package is generated from sources by a *recipe*, which is a description of where to download the sources and how to compile them within Yocto.
- A *layer* is a collection of recipes. Layers are stackable and can extend recipes defined in other layers.
- A *BSP* provides the necessary layers to MSC-LDK to support the target's hardware.
- MSC-LDK is mainly an installer of Yocto, MSC specific layers and BSP layers.

4.2. Setup Optional Docker Container

As Yocto and MSC-LDK use some host tools, a docker container is available for simplified installation.



This description assumes that the docker container will be used only on a single-user workstation. It must not be used on a multi-user server as **YOUR** private SSH keys are installed in the image.

If a proxy has to be used to access the network, the file `Dockerfile` needs to be adjusted. Uncomment these lines and fill in the IP address and port of the proxy:

```
#ARG http_proxy=http://<ip>:<port>
#ARG https_proxy=http://<ip>:<port>
#ENV http_proxy ${http_proxy}
#ENV https_proxy ${https_proxy}
#RUN echo "Acquire::http::Proxy \"${http_proxy}\";" >/etc/apt/apt.conf.d/80proxy && \
#     echo "Acquire::https::Proxy \"${https_proxy}\";" >>/etc/apt/apt.conf.d/80proxy
```

e.g. to:

```
ARG http_proxy=http://172.23.75.27:3128
ARG https_proxy=https://172.23.75.27:3128
ENV http_proxy ${http_proxy}
ENV https_proxy ${https_proxy}
RUN echo "Acquire::http::Proxy \"${http_proxy}\";" >/etc/apt/apt.conf.d/80proxy && \
    echo "Acquire::https::Proxy \"${https_proxy}\";" >>/etc/apt/apt.conf.d/80proxy
```

To install the container:

```
user@devhost:~$ git clone ssh://gitolite@msc-git02.msc-ge.com:9418/msc_0199/docker-msc-ldk
user@devhost:~$ cd docker-msc-ldk
user@devhost:~$ git checkout v1.6.0
```

```

user@devhost:$ mkdir -p src && \
rm -rf rootfs/home/.ssh && \
mkdir -p rootfs/home/.ssh && \
cp ~/.ssh/id_rsa rootfs/home/.ssh && \
cp ~/.ssh/id_rsa.pub rootfs/home/.ssh && \
docker build -t=msc-ldk . && \
rm -rf rootfs/home/.ssh

```

To use the container on an Ubuntu host:

```

user@devhost:$ docker run --privileged -t -i \
--dns $(nmcli -f 'IP4.DNS' -m multiline device show 2>&1 | sed -rn 's/IP4.DNS\[1\]: *(.*)>
/\1/p') \
--name msc-ldk \
-h docker \
-v `pwd`/src:/src \
msc-ldk \
/bin/bash

```

To use the container on a CentOS host:

```

user@devhost:$ docker run --privileged -t \
--dns $(sed -rn '0,/nameserver/ s/nameserver (.*)/\1/p' /etc/resolv.conf) \
--name msc-ldk \
-h docker \
-v `pwd`/src:/src \
msc-ldk \
/bin/bash

```

Inside the docker container MSC LDK has to be cloned as described in [Installation Of MSC-LDK](#). Inside the cloned directory BSPs can be installed and built as shown in sections [Installation Of MSC-LDK BSPs](#) and [Building Images](#), respectively.

When the docker container is no longer used, don't forget to release its resources:

```

user@devhost:$ docker stop msc-ldk
user@devhost:$ docker rm msc-ldk

```

4.3. Installation Of MSC-LDK

The MSC-LDK must be installed on a partition with at least 128 GB free space. As a lot of source files will be accessed, it is recommended to use an EXT4 partition with the mount options `noatime,nodiratime` set.

```

user@devhost:$ git clone ssh://gitolite@msc-git02.msc-ge.com:9418/msc_0199/msc-ldk
user@devhost:$ cd msc-ldk
user@devhost:$ git checkout v1.6.0

```

No files will be installed in other directories.

NOTE: some scripts of the recipes use an 'echo -e <somewhat>' command. bitbake calls the buildscripts with /bin/sh as shell. If your hostsystem uses bash as sh everything works fine. But if a shell with less functionality like dash is used, it is necessary to setup bash as sh. This can be done on most debian derivated systems by:

```

user@devhost:$ sudo dpkg-reconfigure dash

```

The question has to be answered with "no"

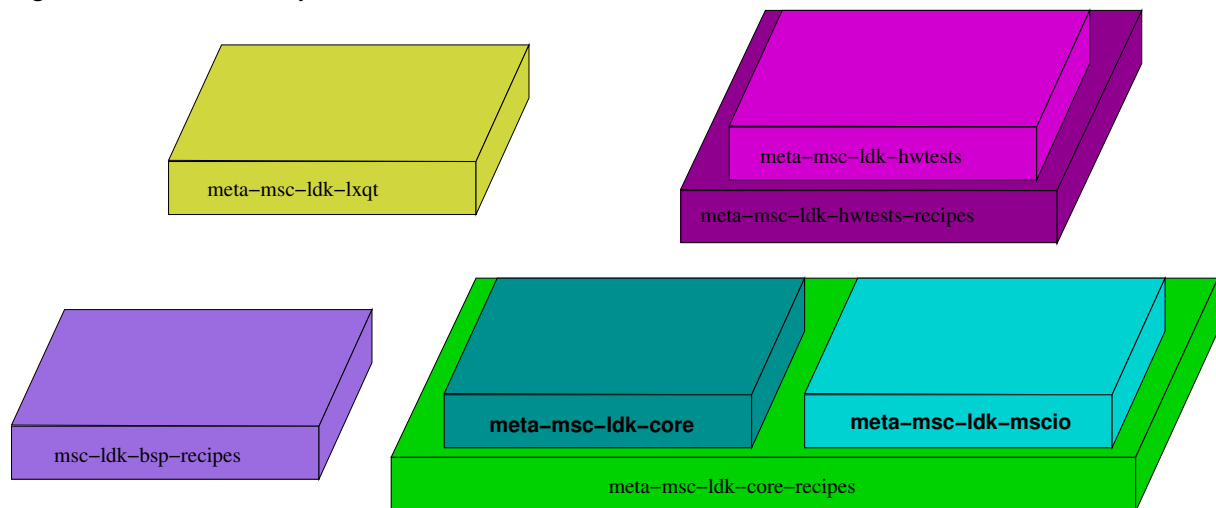
4.4. Directory Layout

Table 4.1. – MSC-LDK Directory Layout

Directory	Contents
build/01011*	BSP build directory.
doc	This contains all the generated Yocto documentation. (only if build with: make doc)
downloads/	All downloaded sources are stored here. This directory can be shared with other MSC-LDK installations.
scripts/	Build helper scripts.
sources/01011/*.git	BSP specific layers. (will be created in chapter 4.5)
sources/meta-freescale.git/	Freescale specific layers, only on Freescale architectures.
sources/meta-intel-*.git/	Intel specific layers, only for Intel architectures.
sources/meta-msc-ldk-*.git/	MSC-LDK layers.
sources/meta-openembedded-*.git/	Additional useful tools that are not part of Yocto.
sources/meta-qt5*.git/	Qt5 layers used by msc-image-lxqt.
sources/yocto.git/	Yocto sources used by MSC-LDK.
sstate-cache/	All built files are stored here and reused on next build. This directory can be shared with other MSC-LDK installations.

4.4.1. MSC-LDK Layers

MSC-LDK consists of several layers. Only the required layers will be activated for the Yocto build process.

Figure 4.1. – MSC-LDK Layers**Table 4.2.** – MSC-LDK Layer Description

Layer	Description
msc-ldk-bsp-recipes	BSP related layer, e.g. Kernel patches for a board. Mandatory for a given board.
meta-msc-ldk-core-recipes	Required recipes to build MSC specific applications.
meta-msc-ldk-core	MSC specific image recipes and package groups. Depends on meta-msc-ldk-core-recipes.
meta-msc-ldk-hwtests-recipes	Hardware test specific recipes.
meta-msc-ldk-hwtests	Board specific image msc-image-hwtests-<BOARD>. Depends on meta-msc-ldk-hwtests-recipes.

Table 4.2. – MSC-LDK Layer Description (continued)

Layer	Description
meta-msc-ldk-mscio	MSC-IO layer. Depends on meta-msc-ldk-core-recipes.
meta-msc-ldk-lxqt	Support for the Lightweight Qt Desktop Environment LXQt (http://lxqt.org).

4.5. Installation Of MSC-LDK BSPs

`setup.py` is used to download the required Yocto layers (they will be installed into the sources subdirectory):

This [BSP](#) can be built only for 64bit.

4.5.1. 64bit Target Linux

To generate 64bit executables for the CPU module, do:

```
user@devhost: $ ./setup.py --bsp=01011
```

4.6. BSP Aliases

`setup.py` supports one of the following aliases for the option `--bsp=`
`intelcombined`, `01011`, `ApolloLake`, `Q7-AL`, `C6C-AL`, `SM2F-AL`, `SM2S-AL`

4.7. Reduced Cleanup Time

Building MSC-LDK images from scratch will create a lot of files in `build/*/tmp/`, for example the sources, object files and executables. Deleting them will take at least 30 minutes. This has a lot of impact on continuous integration build systems. To reduce the cleanup to a few seconds, MSC-LDK can place the `tmp` directory in an image file with `setup.py`'s option `-with-tmp-image`. Building then takes only a few percent more while cleaning up the build directory is only a matter of seconds. As the image file is a sparse file, no more space is effectively being used than building it directly even when the image size is listed as 512 GiB.

To use the `tmp` directory manually, run `make mount_tmp_image` and `make umount_tmp_image` in the build directory.



This feature requires `sudo` permissions for at least the commands `mount`, `chown` and `umount`.

4.8. Building Images

To build all supported images for the installed BSP, do:

```
user@devhost:msc-ldk$ ./setup.py --bsp=01011
user@devhost:msc-ldk$ cd build/01011
user@devhost:01011$ make

Loading cache: 100% |#####| ETA: 00:00:00
Loaded 2703 entries from dependency cache.
[...]
```

Depending on the internet connection and the development host a first build may take several hours. To speed it up on further installations, share the directories `downloads` and `sstate-cache`.

All generated images can be collected in a specific directory with:

```
user@devhost:msc-ldk$ make install_images DESTDIR=/tmp/msc-ldk-images
```

4.9. Traceable And Reproducible Images

One of the key features of Yocto is the strong versioning of the resulting images. Each package uses a predefined version, e.g. busybox 1.32.0. When compiling an image, yocto also prints the used GIT layer versions, e.g.

```
BB_VERSION           = "1.28.0"
BUILD_SYS            = "x86_64-linux"
NATIVELSBSTRING      = "CentOS-Linux-7.1.1503"
TARGET_SYS           = "x86_64-poky-linux"
MACHINE              = "intel-corei7-64-cavs-hda"
DISTRO               = "poky"
DISTRO_VERSION        = "2.0.1"
TUNE_FEATURES         = "m64 corei7"
TARGET_FPU           = ""
meta-yocto
meta-yocto-bsp        = "jethro-msc:c94fbbfb8c10f77022e18e492b41d6ab809012d0"
meta                  = "master:bac6d827c15519becb945941374b45d69b8b23a5"
meta                  = "jethro-msc:c94fbbfb8c10f77022e18e492b41d6ab809012d0"
meta-oe
meta-networking
meta-python           = "jethro-msc:e0a0e2168013305f48564ee4b7c24238eebf2b8"
meta-msc-ldk-core-recipes.git = "master:578ccad7af23219d5873a6d32b50806475ecb233"
meta-msc-ldk-core.git = "master:409f83c4027ca9a21994326334a4bbe4e7a9b211"
meta-msc-ldk-mscio.git = "master:ede1abf912247df8e1f853453fc46208b41dd05b"
meta-intel-leafhill
meta-intel-middleware = "jethro-msc:825b8edb2077037e43073543a9adac9739f05414"
meta-networking       = "jethro-msc:e0a0e2168013305f48564ee4b7c24238eebf2b8"
meta-msc-ldk-hwtests.git = "master:a9b42de3a42322f001ddc02bb17a090b27202aed"
meta-msc-ldk-hwtests-recipes.git = "master:153182baee7ba08262447e9463d459ae2ce1c6c01" }
```

For further improvement, MSC-LDK has these additional features to recreate the image **after** it has been built and shipped:

- The used layers and the setup line how the BSP was configured is stored in the image's file `/etc/version_layer`. After compilation, the file can be also found in the build directory under `tmp/work/01011-ApolloLake-poky-linux/<ImageType>/1.0-r0/rootfs/etc`. Replace `<ImageType>` with your image type, e.g. `msc-image-sato`.
- The setup tool allows to checkout exactly these layers and configure the BSP as before. To use it, call `setup.py` with only one argument `--version-file`, e.g.

```
./setup.py --version-file ~/version_layer
```



Modifications of `conf/local.conf` are not yet traced.



This will checkout exactly the versions used by `version_layer`. It is then no longer possible to use `scripts/update.py` to pull the latest changes on the branch. A fresh checkout of MSC-LDK is necessary. The directories `downloads` and `sstate-cache` can be moved or copied to improve build speed.



Time stamps in the image will be updated, e.g. in `/etc/issue`.

4.10. Building Documentation

To build all Yocto specific documentation, do:

```
user@devhost:msc-ldk$ make doc
```

It will be stored within `doc/`.

The documentation is also available online on the Yocto homepage:

<https://www.yoctoproject.org>.

4.11. Image Types

To suit different use-cases of the MSC-LDK, various image types with different package selections are provided.

4.11.1. Headless

The headless image `msc-image-base` contains only console and framebuffer support without any X11 based GUI.

It can be selectively built by:

```
user@devhost:msc-ldk$ cd build/01011*
user@devhost:msc-ldk/build/01011*$ make msc-image-base
```



`msc-image-base` and `msc-image-sato` currently don't support [predictable network names](#). Therefore no IP addresses are assigned by DHCP. To change this:

1. Disable predictable network interface names with the kernel command line option `net.ifnames=0`
2. Adjust the lines `iface ethX inet dhcp` in `/etc/network/interfaces` and replace `ethX` with the predictable network interface names listed by `ifconfig`, e.g. `enpls0`.

4.11.2. LXQt

The image `msc-image-lxqt` uses the lightweight Qt Desktop environment with Qt 5 instead of SATO. It also includes the HTML5 capable web browser Otter Browser. To use it, the command line option `--layers-lxqt` must be added when executing `setup.py`, e.g.

It can be selectively built by:

```
user@devhost:msc-ldk$ ./setup.py --bsp=01011 --layers-lxqt
user@devhost:msc-ldk$ cd build/01011*-lxqt
user@devhost:msc-ldk/build/01011*-lxqt$ make msc-image-lxqt
```

4.11.3. LXQt SDK

The image `msc-image-lxqt-sdk` extends [LXQt](#) with the necessary tools to build Qt5 applications directly on the target. It is not built automatically.

It must be built by:

```
user@devhost:msc-ldk$ cd build/01011*-lxqt
user@devhost:msc-ldk/build/01011*-lxqt$ make msc-image-lxqt-sdk
```

4.11.4. Sato

The image `msc-image-sato` contains the X11 window manager Sato with some Qt applications. It can be selectively built by:

```
user@devhost:msc-ldk$ cd build/01011*
user@devhost:msc-ldk/build/01011*$ make msc-image-sato
```



[For network configuration see this workaround](#)

4.11.5. Sato SDK

The image `msc-image-sato-sdk` contains the X11 window manager Sato with some Qt applications and development tools like gcc compilers or git to build applications on the target. It is not built automatically.

It must be built by:

```
user@devhost:msc-ldk$ cd build/01011*
user@devhost:msc-ldk/build/01011*$ make msc-image-sato-sdk
```

4.12. Deploying Images To The Hardware

Any image type can be installed the same way as described here with base. Just replace `base` (for headless) in the filename with `lxqt` (LxQt desktop) or `sato` (standard Yocto GUI).

4.12.1. USB

Using .hddimg Images

To create a bootable USB stick with a modifyable root filesystem, copy the image `msc-image-base-intel-corei7-64.hddimg` to an USB stick (e.g. on `/dev/sdh`) with:

```
sudo dd if=tmp/deploy/images/intel-corei7-64/msc-image-base-intel-corei7-64.hddimg of=/dev/sdh1
```

Then insert the stick into the target and reset it. The bootloader will then display a menu with the options `boot` and `install`. If no entry is selected within 1 second, the system will automatically boot into the live-system `boot`. Automatically booting can be interrupted by pressing the `Tab` key.



The `hddimg` file is configured to have about 10 MiB free space available independent of the size of the USB stick.



When selecting `install` there might be various messages
`udev: failed to execute /etc/udev/scripts/mount.sh`
`'/et/udev/scripts/mount.sh': No such file or directory.`
They can be ignored.



The `hddimg` file must be copied onto the first partition (`sdh1`) and not the whole disk (`sdh`), otherwise the BIOS might not recognize the card.

Use .wic Images

Alternatively instead of `.hddimg` images, `.wic` images can be copied to an USB stick. These images don't feature an installation option. And unlike the `.hddimg` images where the rootfs is mounted via loopback from the image file `rootfs.img` the root filesystem is mounted directly from the stick. So they are a better fit to use the image right ahead.

The `.wic` images use GPT for partitioning (https://en.wikipedia.org/wiki/GUID_Partition_Table). One property of the partitioning style is, that some meta data is expected at the end of the disc. Often is an image copied to a larger disc. This causes error messages in the kernel log when the Linux kernel mounts the partition:

```
# dmesg | grep GPT
[ 6.345504] GPT:Primary header thinks Alt. header is not at the end of the disk.
[ 6.355685] GPT:2169825 != 7708671
[ 6.361382] GPT:Alternate GPT header not at the end of the disk.
[ 6.370027] GPT:2169825 != 7708671
[ 6.375741] GPT: Use GNU Parted to correct GPT errors.
```

The script `fix-gpt-error` can be used on the development host to correct this problem after using `dd` to copy the image to the USB stick:

```
user@devhost:misc-ldk$ sudo dd if=tmp/deploy/images/intel-corei7-64/
msc-image-base-intel-corei7-64.wic of=/dev/sdh
user@devhost:misc-ldk$ scripts/fix-gpt-error /dev/sdh
[sudo] password for <user>:
'Alternate GPT header not at end of disk' problem fixed for '/dev/sdh'.
```

4.12.2. SD Card

The image `msc-image-base-intel-corei7-64.hddimg` can also be used for SD cards. See section [USB](#) for installation instructions.

4.12.3. SATA

Proceed as described in section [USB](#) but select the menu `install`. Follow the instructions to install the Linux system to the SATA drive.

4.12.4. Other

Other possible deployment types are:

- For booting from DVD or other read-only media, use the images with the extension `.iso`.
- For booting the root filesystem as a ram disk or to manually install it into a partition, use the images with the extension `.cpio.gz`.

4.13. Login

Login is enabled via console or serial console (`/dev/ttyS0`, 115200 baud/8 bits/no parity). The headless and Sato images also have telnet login enabled.

Table 4.3. – User Accounts

Account	Password	Comment
root	mscldk	LXQt/Sato GUI require no login. No password is necessary for hardware test image.
msc	msc	Standard user with sudo permissions.

4.14. Enabled Services

Enabled services are:

- telnetd
- Serial console on /dev/ttyS0 with 115200 baud/8 bits/no parity

4.15. Enhancing The Images

4.15.1. Finding New Packages

Additional tools or functionalities that are needed inside the BSP can be included in the image by adding one or several packages that provide those tools. To identify the needed package, search publicly available recipes at

<https://layers.openembedded.org/layerindex/branch/master/recipes/>

For each recipe the containing layer is listed. If this layer is not already included in the MSC LDK, it has to be added according to [Adding Own Layers](#). See [Traceable And Reproducible Images](#) for instructions on how to list the layers used in your BSP.

The package can then be added to the image by following the instructions in [Adding Other Packages](#).

4.15.2. Adding Other Packages

Further packages can be included in the images by adding these lines to:

build/01011*/conf/local.conf:

```
IMAGE_INSTALL += " \
    my-foo-package \
"
```

Further information can be found here:

http://www.yoctoproject.org/docs/3.0.1/ref-manual/ref-manual.html#var-IMAGE_INSTALL

This can be automatized by calling `setup.py` with the argument `--local-conf` and an existing file whose content should be appended to `build/01011*/conf/local.conf`. A non-existing file is silently ignored.

```
user@devhost:msc-ldk$ cat << _EOF >conf.append
IMAGE_INSTALL += " \
    my-foo-package \
"
_EOF
```

```
user@devhost:msc-ldk$ ./setup.py --bsp=01011 --local-conf-append=conf.append
```

4.15.3. Adding Own Layers

The images can be further enhanced or configured by adding own layers. Extend the file `build/01011*/conf/bblayers.conf` by these lines:

```
BBLAYERS += " \
    /home/user/my-own-msc-ldk-layer/ \
"
```

Then create the layer as described here:

<http://www.yoctoproject.org/docs/3.0.1/dev-manual/dev-manual.html#creating-your-own-layer>

This can be automatized by calling `setup.py` with the argument `--add-layer` and the layer's URL. The layer will then be downloaded to `sources/addons/`

```
user@devhost:msc-ldk$ ./setup.py --bsp=01011 --add-layer=https://github.com/OSSystems/meta-browser
```

4.15.4. Network Configuration

Network Interface Names

MSC-LDK uses predictable network interface names (<https://www.freedesktop.org/wiki/Software/systemd/PredictableNetworkInterfaceNames/>). This setup has the advantage that the network interfaces have the same name on every boot of the system.

To switch back to the old network interface names (`eth0`, ...), there are two ways:

1. Pass the kernel command line parameter `net.ifnames=0`
2. Create an empty file `/etc/udev/rules.d/80-net-name-slot.rules` (this will overrule `/lib/udev/rules.d/80-net-name-slot.rules`)

System Wide Proxy Configuration

The package `proxy-config` installs the script `/etc/profile.d/proxy.sh`.

The content of `proxy.sh` can be configured by setting variables in `build/01011*/conf/local.conf`:

```
NO_PROXY      = "localhost,127.0.0.0/8"
HTTP_PROXY    = "http://proxy.server.com:3128"
HTTPS_PROXY   = "http://proxy.server.com:3128"
FTP_PROXY     = ""
SOCKS_SERVER  = ""
```

4.15.5. Time Zone Setup

The default time zone is set to `Europe/Berlin`. The time zone can be customized by setting the Yocto variable `DEFAULT_TIMEZONE` in `build/01011*/conf/local.conf`. To set the time zone to `Rome`, use the following:

```
DEFAULT_TIMEZONE = "Europe/Rome"
```

The available time zones can be found in `/usr/share/zoneinfo`.

The time zone is entered in `/etc/timezone` and there is a symbolic link: `/etc/localtime->/usr/share/zoneinfo/Europe/Berlin`.


It is also possible to change the time zone of a running system to e.g. `New York`, using the following shell commands:

```
# rm -f /etc/localtime
# ln -s /usr/share/zoneinfo/America/New_York /etc/localtime
# echo "America/New_York" > /etc/timezone
```

4.16. Using LXQt

LXQt is a lightweight desktop for Qt based systems (<http://lxqt.org>).

Figure 4.2. – LXQt - Mainwindow

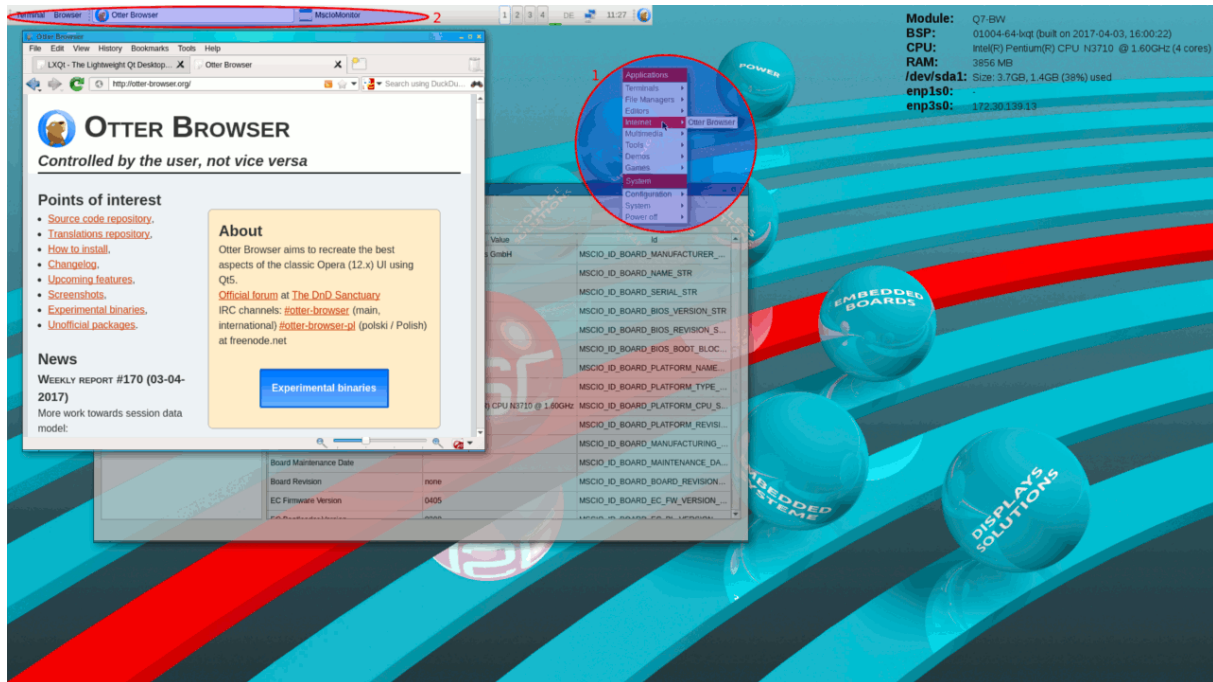

The pre-configured applications are accessible using the right mouse button.


- Application Launcher (1) - If the right mouse button is pressed on the desktop, the pre-configured application list is opened for launching terminal, browser, editor etc.
- Window List (2) - The top panel lists the windows applications.

4.17. ConnMan Configuration

The internet connection daemon ConnMan (<https://01.org/connman>) is used in LXQt images to manage the internet connections.


The ConnMan Property Editor can be launched using a right-click on the LXQt desktop:

Figure 4.3. – Start ConnMan Property Editor

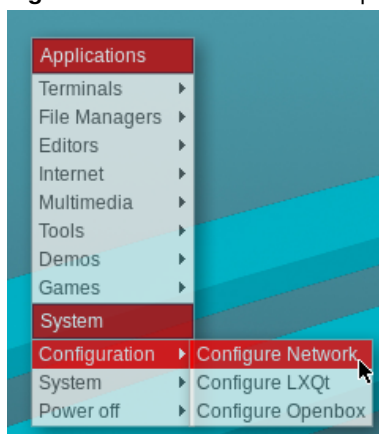


There is a detailed overview for each connection when the Details tab is selected:

Figure 4.4. – View ConnMan Properties

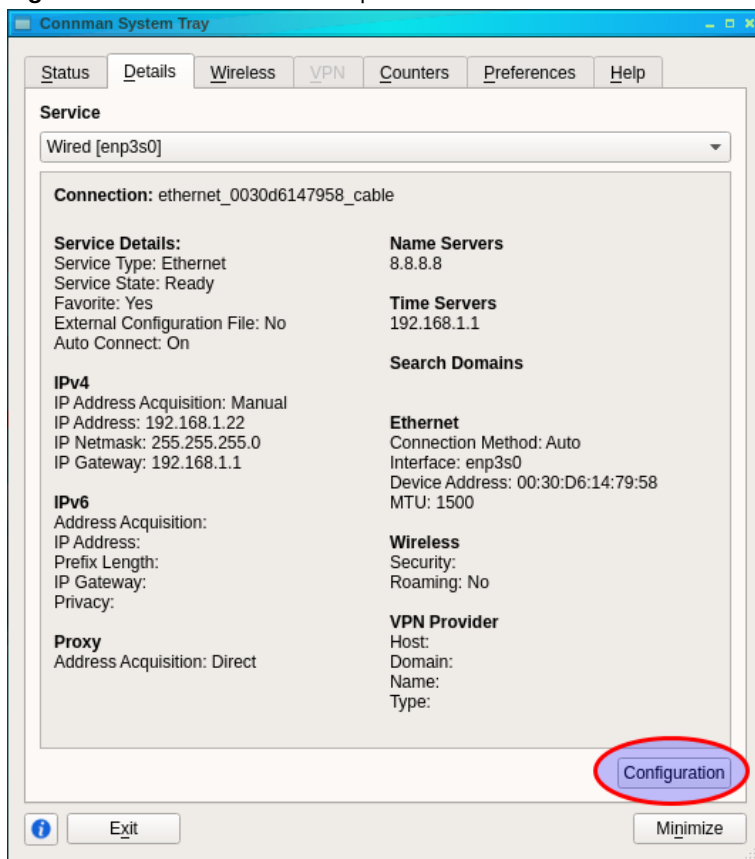

Pressing the Configuration button in the Details tab opens the configuration dialog that allows to do a manual IP assignment (it is important to enter Address, Netmask and Gateway – otherwise the setting is not applied):

Figure 4.5. – Manual IP Assignment

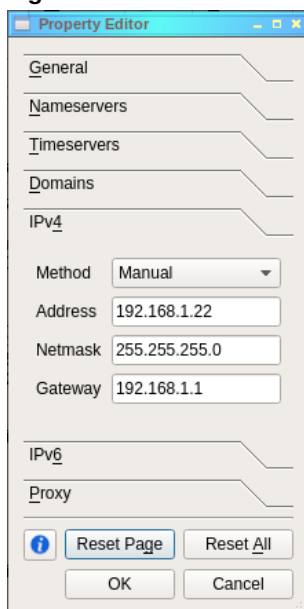

The tool `connman-info` can be used to show retrieve network interface details:


```
# connman-info
[/net/connman/service/ethernet_0044d6143d58_cable]
  Name = Wired
  IPv6 = {}
  IPv4.Configuration = {Method=dhcp}
  Nameservers = [192.168.1.49, 192.168.1.57]
  IPv6.Configuration = {Method=off}
  IPv4 = {Netmask=255.255.255.0, Method=dhcp, Gateway=192.168.1.201, Address=192.168.1.13}
  Domains.Configuration = []
  Timeservers = [192.168.1.201]
  Domains = []
  State = ready
  Ethernet = {MTU=1500, Interface=enp3s0, Method=auto, Address=00:44:D6:14:3d:58}
  Security = []
  Immutable = false
  Favorite = true
  Timeservers.Configuration = []
  Proxy.Configuration = {Method=direct}
  Type = ethernet
  AutoConnect = true
  Provider = {}
  Proxy = {Method=direct}
  Nameservers.Configuration = []
```

4.17.1. Proxy Configuration For The otter-browser



The Otter Web Browser has no proxy pre-configured. On some systems it is therefore necessary to manually setup the proxy configuration (under Tools/Preferences/Network). It is also possible to do a system wide proxy setup (see section 4.15.4).


Figure 4.6. – Otter Browser - Proxy Setup

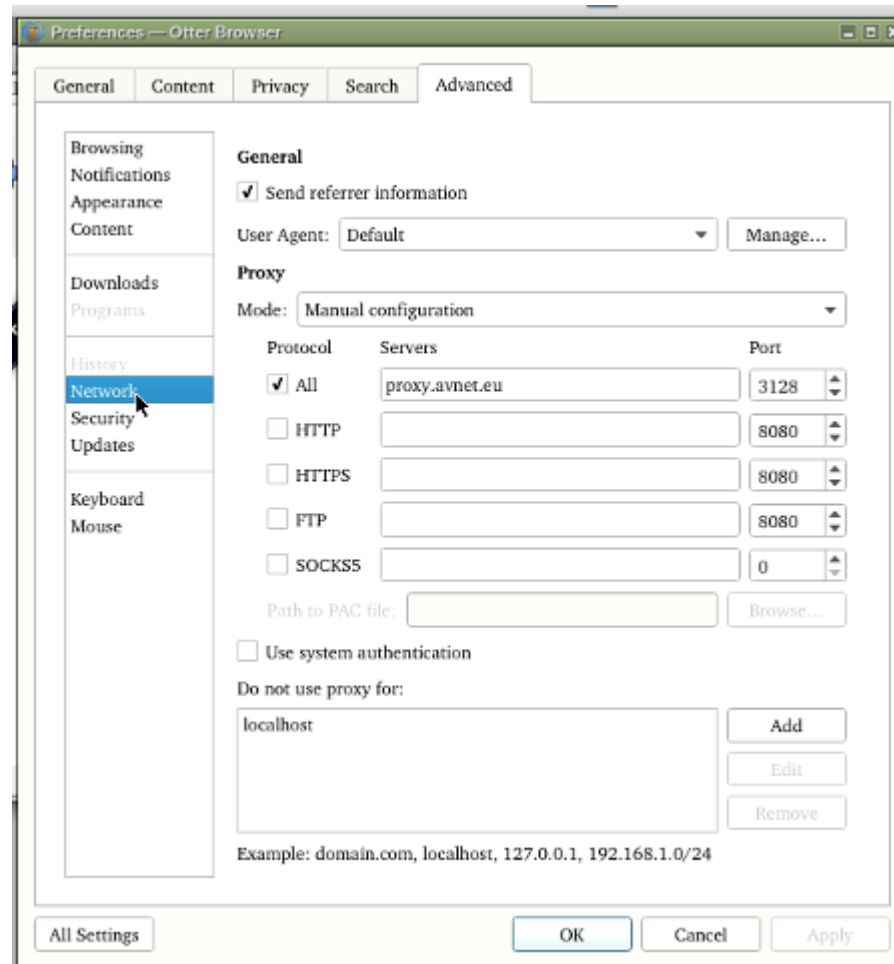

4.18. Using Sato

Sato is a window manager in which applications run full-screen, optimized for use with touch-displays.

Figure 4.7. – Sato - Mainwindow

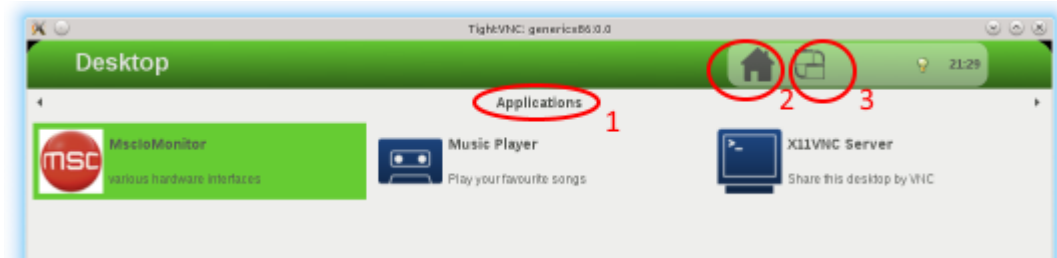

- Dropdown Box (1) - This lists the various application groups.

Figure 4.8. – Sato - Groups



- Button (2) - This displays the application group.
- Dropdown Box (3) - This lists the running GUI applications.

Figure 4.9. – Sato - Selecting Running Apps



4.19. Using The SDK Images

The `msc-image-*-sdk` images contain everything for building applications on the target, e.g. gcc, system header files, make, cmake, git, gdb etc. This simplifies development because the application can be developed before any yocto recipes for it are created.

4.19.1. Setting Up The Development Host

The development host is used for editing the source files or running analyzes, e.g. code coverage. The source files could be shared using NFS.

Create an entry in `/etc/exports` to the base of your sources. Use your own UID/GID for `anonuid` and `anongid`.

```
/home/developer/src *(rw,all_squash,no_subtree_check,anonuid=2000,anongid=2000)
```

File 4.1 – `/etc/exports`

Restart the NFS server, e.g. with:

```
sudo service nfs-kernel-server restart
```

4.19.2. Setting Up The Target

The sources are ideally mounted with the same hierarchy as on the development host. Replace `192.168.150.2` with the IP address of the development host.

Add an entry in /etc/fstab so the user MSC can mount the directory:

```
sudo /bin/bash
echo "192.168.150.2:/home/develop/src /home/develop/src auto user,exec 0 0" >>/etc/fstab
mkdir -p /home/develop/src
exit

mount /home/develop/src
```

4.19.3. Building hello_world Manually

Create the file hello_world.c in /home/develop/src.

```
#include <stdio.h>

int main(int argc, char *argv[])
{
    printf("Hello world\n");
    return 0;
}
```

File 4.2 – hello_world.c

Build and run it with:

```
gcc -o hello_world hello_world.c && ./hello_world
```

To debug it, rebuild it with debugging information and run it with:

```
gcc -g -o hello_world hello_world.c && gdb ./hello_world
```

4.19.4. Building hello_world With CMake

Create the file CMakeLists.txt in /home/develop/src.

```
project(hello_world)

add_executable(
    hello_world
    hello_world.c
)
```

File 4.3 – CMakeLists.txt

Build and run it with:

```
mkdir Release
cd Release
# This will take a while as cmake is slow on NFS
cmake ..
make && ./hello_world
```

4.19.5. Building Qt Based hello_world (Only In msc-image-ixqt-sdk)

Create the file hello_world.cpp in /home/develop/src.

```
#include <QApplication>
#include <QLabel>

int main(int argc, char *argv[])
{
    QApplication a(argc, argv);
    QLabel label("Hello world");

    label.show();
    return a.exec();
}
```

File 4.4 – hello_world.cpp

Create the file `hello_world.pro` in `/home/develop/src`.

```
QT      += core gui widgets
TARGET  = hello_world
TEMPLATE = app
SOURCES += hello_world.cpp
```

File 4.5 – `hello_world.pro`

Build and run it with:

```
qmake hello_world.pro && make && ./hello_world
```

4.20. German Keyboard Layouts

To support different keyboard layouts even when RAMDISK images are used (cpio.gz), the keyboard can be selected using a kernel command line, e.g. `set` in `EFI/BOOT/grub.cfg`.


To enable german keyboard layout, add the kernel command line option: `keyboard=de-latin1-nodeadkeys`

4.21. Bug Reporting

To simplify collecting information necessary for effectively responding to bug reports, use the tool `msc_bug_report.sh` to generate bug report message. It will collect all necessary information like hardware, kernel logs etc.


- Run `msc_bug_report.sh`.

Figure 4.10. – Bug Reporting - Start

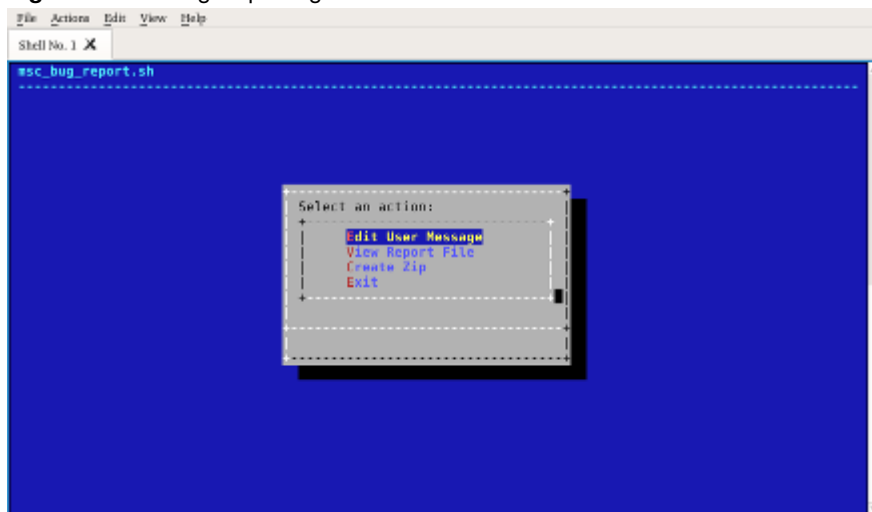


- Select “Edit User Message”.
- Enter bug report message and press Ctrl-O and Ctrl-X.

Figure 4.11. – Bug Reporting - Start

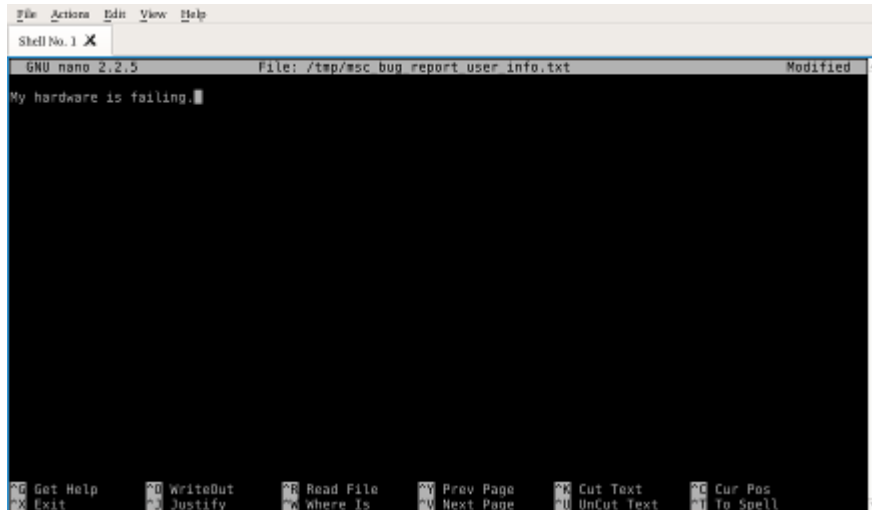


- Optionally you can then view the message with the board report (hardware information).

Figure 4.12. – Bug Reporting - View

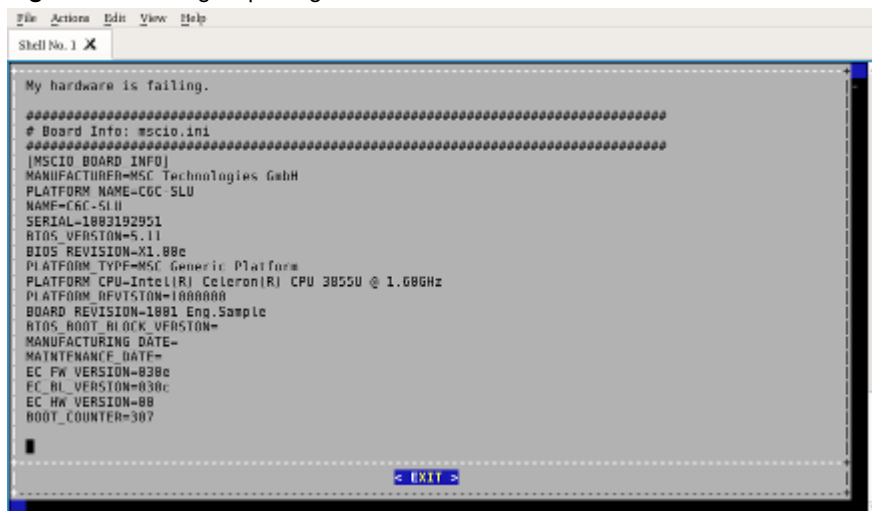


- Press “Create a zip file” and select the components you want to send (e.g. bootlog, mscio.ini, last kernel logs (dmesg) or the installed hardware).

Figure 4.13. – Bug Reporting - Create Zip

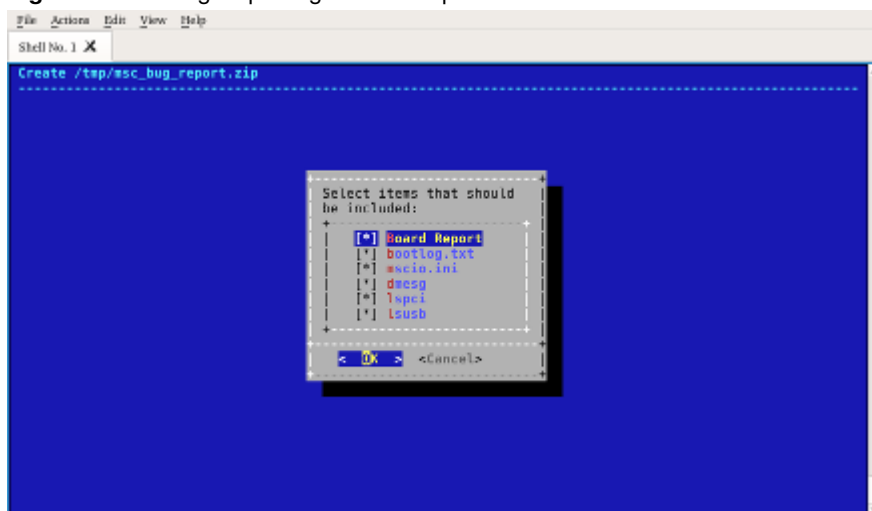

- Press “Save ZIP to a disc” and select the filesystem where to store the zip file. It is recommended to use a USB stick.

Figure 4.14. – Bug Reporting - Save Zip

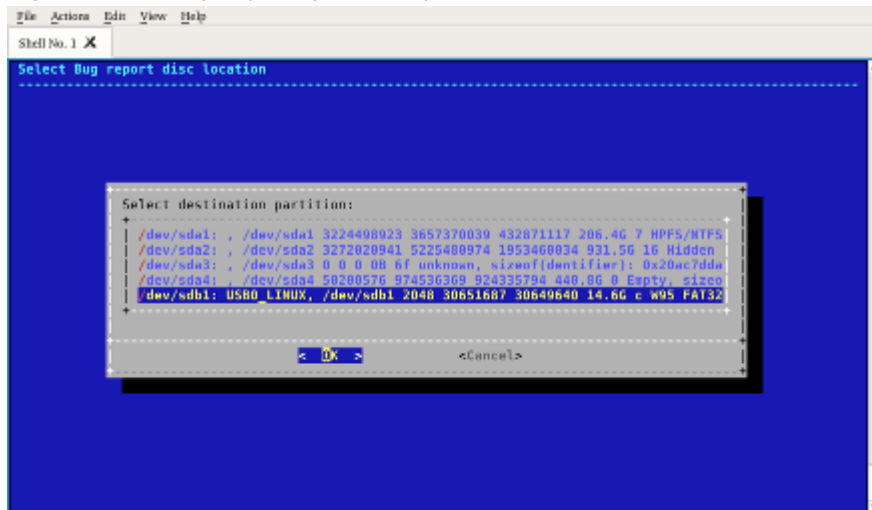

- Send the files `msc_bug_report_brief.txt` and `msc_bug_report.zip` to MSC (<http://www.msc-technologies.eu/de/support.html>)

4.22. Hotfixes And Updating MSC-LDK

Typically twice a year a full MSC-LDK release is created. A release may contain an updated Yocto or other updated layers as well as new supported boards. For each release an own branch is used (e.g. `v1.0.0`) which is tagged with the date encoded (e.g. `LC984_20150421_V0_4_0`, 21st April 2015), too. The release is checked out using the version syntax (`git checkout v1.6.0`) as described above.

Sometimes an intermediate hot-fix is necessary which doesn't modify the resulting image but fixes changed repository locations of third party software or similar light changes. Hot-fixes are tagged with a newer date stamp (e.g. `LC984_20160113_V0_4_0`). A hot-fix can be checked out explicitly using these tags.

When MSC-LDK is checked out freshly all hot-fixes are applied automatically. To update an older checkout and to pull all the newer hot-fixes, run `scripts/update.py` from the MSC-LDK root directory. This will update MSC-LDK and all layers. Depending on the kind of hot-fix running `setup.py` again might be necessary. When a hot-fix has been checked out explicitly, running `update` will not make sense and it will fail with an error.

After the first call of `setup.py` no manual "git checkout" must be performed as its layers need to be in synchronization with MSC-LDK. Either use `update.py` or clone MSC-LDK again. The subdirectories `download` and `sstate-cached` can be moved to other MSC-LDK installations or shared by symbolic links.

Early adaptors of new BSPs might want to use the master branch instead of a released branch. Here `update.py` must also be used.

5. Package List

The MSC-LDK contains various MSC specific packages which are described here.

5.1. eapi-so

This package provides the libEApi.so library implementing the [EAPI](#) standard for accessing the hardware.

Dependencies: [mscio](#).

5.2. mscio

This package provides mscio-setup and libMsclo for hardware initialization and enumeration of non-plug-and-play hardware devices.

In the images msc-image-base, msc-image-sato and msc-image-lxqt, the application mscio-setup is loaded automatically on startup, visualized by this message:

```
Loading MSC-IO: Done
```

This can be disabled by setting the kernel command line option `mscio_disable=y`.

5.3. system-test-controller

This package provides the system-test-controller application which controls system and hardware tests defined in .ini files in /etc/system-test-controller.cfg.

A. Glossary

BSP Board Support Package. [18](#), [22](#)

EAPI Embedded Application Programmer Interface. [38](#)

EFI Extensible Firmware Interface. [40](#)

MSC-LDK MSC Linux Development Kit. [14](#), [18](#)

B. Bootloader Configuration

B.1. RAMDISK

It is possible to install the Linux images on a DOS formatted USB stick or SD card and boot them via [EFI](#).

Advantages are:

- No changes are persistent, so the system boots every time the same environment.
- The boot media can be removed once Linux is running.
- The boot media can be setup by a windows host without further tools.

Disadvantages are:

- More RAM is required as the Linux kernel and root file-system is kept there.
- Booting large images take longer as the BIOS has to load everything.

To install, copy the configuration `grub.cfg` and the bootloader `bootx64.efi` into the directory `EFI/BOOT` of the boot media. Then run:

```
user@devhost:msc-ldk$ make install_images DESTDIR=<mountpoint_bootmedia>/images

default=msc-image-base-apollo-lake-64
timeout=2

menuentry 'msc-image-base-apollo-lake-64' {
    linux /images/bzImage-intel-corei7-64.bin LABEL=base loglevel=3 vga=1 vmalloc=256M ↵
        ramdisk_size=196608 root=/dev/ram
        initrd /images/msc-image-base-intel-corei7-64.cpio.gz
}
```

File B.1 – `EFI/BOOT/grub.cfg`

C. X11/SATO Configuration

C.1. Screens

The screens can be configured on the fly with the `xrandr` tool.

At first determine the list of possible modes:

```
root@genericx86:~ # xrandr
Screen 0: minimum 320 x 200, current 1920 x 1080, maximum 32767 x 32767
LVDS1 connected 1024x768+0+0 (normal left inverted right x axis y axis) 0mm x 0mm
   1024x768    60.0*+
   800x600    60.3    56.2
   640x480    59.9
VGA1 connected 1920x1080+0+0 (normal left inverted right x axis y axis) 598mm x 336mm
   1920x1080    60.0*+
   1680x1050    60.0
   1280x1024    75.0    60.0
   1440x900     75.0    59.9
   1280x960     60.0
   1152x864     75.0
   1280x720     60.0
   1024x768     75.1    70.1    60.0
   832x624      74.6
   800x600      72.2    75.0    60.3    56.2
   640x480      75.0    72.8    66.7    60.0
   720x400      70.1
HDMI1 disconnected (normal left inverted right x axis y axis)
DP1 disconnected (normal left inverted right x axis y axis)
VIRTUAL1 disconnected (normal left inverted right x axis y axis)
```



The available screens depends on the CPU module being used.

Then reconfigure the screen with:

```
root@genericx86:~ # xrandr --output VGA1 --mode 800x600
```

D. Graphic Demos



When launching applications from a telnet/ssh login, the following command must be executed first:
`export DISPLAY=:0.0`

D.1. Graphic driver status

D.1.1. igt-gpu-tools

This is a collection of performance, information and debugging tools for intel cards.

Table D.1. – Intel IGT GPU Tools

Application	Description
<code>intel_gpu_top</code>	Displays the GPU frequency, power usage and subsystem load.

D.2. Video Acceleration

D.2.1. GStreamer

With GStreamer it is possible to playback H.264/MP4 videos accelerated by the video hardware.

- Automatic selection of decoder and playback devices:

```
gst-launch-1.0 playbin uri=file:///video.mp4
```

- When audio is not available (message “ The autoaudiosink element is not working”), disable audio manually:

```
gst-launch-1.0 playbin uri=file:///video.mp4 audio-sink=fakesink
```

- Verbose output:

```
gst-launch-1.0 -v playbin uri=file:///video.mp4 audio-sink=fakesink
```

- Manually selection of the video pipeline:

```
gst-launch-1.0 filesrc location=/video.mp4 ! qtdemux ! vaapidecodebin ! vaapisink >
fullscreen=true
```

- To list all available sources:

```
gst-inspect-1.0 | grep src
```

- To list all available sinks/playback devices:

```
gst-inspect-1.0 | grep sink
```

- To list all available decoder:

```
gst-inspect-1.0 | grep decoder
```

- To list all available encoder:

```
gst-inspect-1.0 | grep encoder
```

The load can be displayed by running `intel_gpu_top`.

The measured CPU load should increase only by 10% while the render can increase by 40%.

E. Supported Periphery

Table E.1. – Supported periphery

Periphery	Status	Comment
ACPI	implemented	see ACPI
Audio	implemented	see Audio
Backlight	implemented	see Backlight
Beeper	implemented	
Bluetooth	implemented	see Bluetooth
ECC Memory / EDAC	implemented	see ECC Memory / EDAC
Ethernet	implemented	
eMMC	implemented	
GPIOs	implemented	see User GPIOs
Graphic output	implemented	see Dual Head Support
Video encoding/decoding (H.264 and H.265)	implemented	see Video Acceleration
Hardware sensors	implemented	see Hardware Monitoring
I2C	implemented	see I2C
NVRAM	implemented	see NVRAM
LPC	implemented	use <code>superiotool</code> .
PCIe	implemented	
RTC	implemented	
SATA	implemented	
SD/MMC	implemented	see SD/MMC
SMBus	implemented	see I2C Bus Identification
SPI	implemented	see SPI
TPM	implemented	
UART	implemented	see UART
USB-2.0	implemented	
USB-2.0 device	implemented	see USB Device Support
USB-3.0	implemented	
Watchdog	implemented	see Watchdog
WLAN	implemented	see WLAN

E.1. Audio

LxQT supports sound via PulseAudio, all other images use ALSA directly. Pulse and ALSA are configured and used slightly differently.

E.1.1. PulseAudio

Sound controls can be controlled via the GUI with `pavucontrol-qt` or command-line with `pactl`.

Playback

To play sound, do:

```
aplay /usr/share/sounds/alsa/Front_Center.wav
```

To select the analog output device, do:

```
pactl set-card-profile 0 output:analog-stereo
```

To select the HDMI output device, do:

```
pactl set-card-profile 0 output:hdmi-stereo
```

Recording

To record from the microphone, do:

```
# Stop recording with Ctrl-C
pactl set-card-profile 0 output:analog-stereo+input:analog-stereo
arecord record.wav
```

Miscellaneous

- If the message “Connection refused” is printed when using audio tools on an SSH terminal, try setting the environment variable `DISPLAY` to `:0` as SSH's ForwardX11 doesn't work with PulseAudio.
- The persistent pulse audio configuration is stored in `~/.config/pulse`
- PulseAudio has been configured to support access for all users of the system, not only the desktop user.
- The list of profiles can be determined with:

```
pactl list | grep 'Part of profile'
```

Alternatively, use `pavucontrol-qt` and select the profile in the tab `Configuration`

E.1.2. ALSA

Sound controls can be modified with `alsamixer`.

Playback

To play sound on the headphone jack, do:

```
aplay /usr/share/sounds/alsa/Front_Center.wav
```

Recording

To record from the microphone, do:

```
# Set microphone sensibility
amixer sset 'Mic Boost' 100
# Stop recording with Ctrl-C
arecord record.wav
# Play back with
aplay record.wav
```

Playback With HDMI

- Determine which sound device is used for HDMI. This setting is dependent on the connected monitors and sound cards.

```
speaker-test -t sine -D 'hdmi:CARD=PCH,DEV=0' -c 2
```

The list of supported hdmi PCM devices can be retrieved with:

```
aplay -L
hdmi:CARD=PCH,DEV=0
    HDA Intel PCH, HDMI 0
    HDMI Audio Output
hdmi:CARD=PCH,DEV=1
    HDA Intel PCH, HDMI 1
    HDMI Audio Output
hdmi:CARD=PCH,DEV=2
    HDA Intel PCH, HDMI 2
    HDMI Audio Output
```

- aplay requires the sound files to be in the correct format for HDMI (e.g. S16_LE). To convert them on the development host, run:

```
sox <input.wav> -b 16 -c 2 <output.wav>
```

- To make HDMI the default sound device, create a file `/root/.asoundrc` with this content:

```
pcm.!default {
    type hw
    card 0
    device 3
}
```

Note that the device number is changed. This is because it is the raw device which list can be retrieved with:

```
aplay -l
**** List of PLAYBACK Hardware Devices ****
card 0: PCH [HDA Intel PCH], device 3: HDMI 0 [HDMI 0]
  Subdevices: 1/1
  Subdevice #0: subdevice #0
```

Persistent Mixer Settings

The mixer settings can be saved to `/var/lib/alsa/asound.state` with `alsactl store` and restored with `alsactl restore`.

E.2. ECC Memory / EDAC

When ECC memory is installed, an EDAC device will be provided by the driver `pnd2_edac` at `/sys/devices/system/edac/mc/mc0`. The correctable errors will be listed in the file `ce_count`, uncorrectable errors in `ue_count`.

E.3. I2C

The I2C bus is named `Synopsys DesignWare I2C adapter` and provided by the driver `i2c_designware_platform`, run `i2cdetect -l` to retrieve the actual bus number. Or use the [I2C Bus Identification](#) feature. The speed (Standard/100 kHz or Fast/400 kHz) is configured by the BIOS setup entry `Advanced/Module-specific Initialization/Set LPSS I2C #5 Speed`.

E.4. SD/MMC

SD cards are accessible as usual under `/dev/mmcblk<N>`.

In case the signal-path length of the whole system (CPU, CPU-Module, Baseboard) is at or above the specification, reducing the signal frequency might be a workaround. This can be achieved with the kernel command line option `sdhci_pci.max_freq` and the maximum frequency in MHz. Possible values are 50,100,208.

For example: `sdhci_pci.max_freq=25`

enforces the driver to use an UHS-I card in SDR12 (25 MHz) mode instead of its maximum speed.

If the parameter is accepted, the driver will print a kernel message starting with: `SD quirks enforced:`

The values can be verified in the debugfs:

```
cat /sys/kernel/debug/mmc0/ios
clock:                250000000 Hz
actual clock:         250000000 Hz
vdd:                  21 (3.3 ~ 3.4 V)
bus mode:             2 (push-pull)
chip select:          0 (don't care)
power mode:           2 (on)
bus width:            2 (4 bits)
timing spec:          3 (sd uhs SDR12)
signal voltage:       1 (1.80 V)
driver type:          0 (driver type B)
```

They are only valid if a file-system is mounted!

As SDR25 and DDR50 use both 50MHz, DDR50 can be explicitly disabled with:

```
sdhci_pci.disable_ddr50=1
```

E.5. USB Device Support

USB device support means the board appears as an USB device and can be connected to another host. This is achieved by loading various gadget drivers. All these tests assume that the hardware is connect to a linux host (which may be the board itself).

E.5.1. Setting Up USB Device Functionality

USB Device functionality is provided by some hardware variants on port 1. XDCI support must be enabled in the BIOS setup by setting `Chipset/South Cluster Configuration/USB Configuration/XDCI Support` to `PCI Mode` and `USB HW MODE AFE Comparators` to `Enabled`.

Linux will then load the drivers `dwc3-pci` and `portmux_intel_drcfg`.

The type of the port can be changed at run-time via. Initial state is typically peripheral.

To configure the port as an USB host port:

```
echo host >/sys/bus/platform/devices/intel-mux-drcfg/portmux.0/state
```

To configure the port as an USB device port:

```
echo peripheral >/sys/bus/platform/devices/intel-mux-drcfg/portmux.0/state
```

E.5.2. Testing Connection

To load the driver, do:

```
modprobe g_zero
```

A new USB device `0525:a4a0` Netchip Technology, Inc. Linux-USB "Gadget Zero" will appear.

To disable the device, run:

```
rmmod g_zero
```

E.5.3. Setting Up Serial Gadget

To load the driver, do:

```
modprobe g_serial
```

A new USB device 0525:a4a7 Netchip Technology, Inc. Linux-USB Serial Gadget (CDC ACM mode) will appear.

On the host side, open a reader via `stty -F /dev/ttyACM0 raw; dd if=/dev/ttyACM0`. On the device, send some text via `hostname >/dev/ttyGS0`.

To disable the device, run:

```
rmmod g_serial
```

E.5.4. Setting Up Ethernet Gadget

To load the driver, do:

```
modprobe g_ether
```

A new USB device Netchip Technology, Inc. Linux-USB Ethernet/RNDIS Gadget will appear.

On the host side, assign an IP address with `ifconfig usb0 192.168.160.2`. On the device, assign an IP address with `ifconfig usb0 192.168.160.3`. The host can now ping the device with `ping 192.168.160.3`.

To disable the device, run:

```
rmmod g_ether
```

E.5.5. Setting Up Mass/File Storage Gadget

To setup a simulated mass storage device, do:

```
dd if=/dev/zero of=/tmp/image.bin bs=1K count=128
mkfs.vfat /tmp/image.bin
mount -o loop /tmp/image.bin /mnt
cp /etc/hostname /mnt
umount /mnt
modprobe g_mass_storage file=/tmp/image.bin
```

A new USB device Netchip Technology, Inc. Linux-USB Storage Gadget will appear.

It can be mounted and the contents modified.

To disable the device, run:

```
rmmod g_mass_storage
```

E.6. UART

The kernel reserves 4 serial port devices (`/dev/ttyS0 ... /dev/ttyS3`) for legacy devices even when the PCU UART is disabled in the BIOS (default) and the baseboard has no superio connected. Accessing any of these devices, e.g. with `stty -F /dev/ttyS0` will result in I/O errors.

Any none legacy serial ports will be appended. This is the case on the ApolloLake where the CPU internal serial port is assigned `/dev/ttyS4`.

To determine the operating UART devices, use the following command:

```
cat /proc/tty/driver/serial|tail -n +2|grep -v uart:unknown

4: uart:16550A mmio:0x7FFFF14000 irq:43 tx:0 rx:0
5: uart:16550A mmio:0x7FFFF12000 irq:44 tx:0 rx:0
6: uart:16550A mmio:0x7FFFF10000 irq:45 tx:0 rx:0 CTS
7: uart:16550A mmio:0x7FFFF0E000 irq:46 tx:0 rx:0
```

This lists four operating UART devices, starting with 4 (`/dev/ttyS4`).

Another possibility is to configure the kernel to reserve less UART ports with the kernel command line option `8250.nr_uarts=<n>`, e.g. `8250.nr_uarts=1`. Then the CPU module's serial port will become `/dev/ttyS0`.

A login shell is created on the first operating serial port with 115200 baud, 8 databits, no parity. This can be overridden with the kernel command line option `vconsole=/dev/ttyS0`.

E.7. SPI

SPI is available.

E.8. Powermanagement

E.8.1. Supported Capabilities

To determine whether suspend to ram/S3 is supported, run:

```
pm-is-supported --suspend && echo "S3 is supported" || echo "S3 is not supported"
```

To determine whether hibernation/suspend to disk/S4 is supported, run:

```
pm-is-supported --hibernate && echo "S4 is supported" || echo "S4 is not supported"
```

E.8.2. Suspend To RAM / S3

To suspend to RAM, run `pm-suspend`. The RAM will be placed into self-refresh mode and the CPU be disabled until [Wake-up Sources](#) trigger the wake-up. The power supply must still be enabled.

E.8.3. Wake-up Sources

Power-Button

The power button is always enabled as a wake-up source.

RTC

To wake-up in `n` seconds, enter the absolute system time in seconds when to wake-up in the file `wakealarm`. To wake-up in `+n` seconds, get the current system time and increment it.

This code sets the wake-up alarm in 15 seconds from now. If it was successful, the system is put in standby. Note that going to standby takes some time, but we must be asleep for the wake-up alarm to take effect.

```
expr $(date +%s) + 15 > /sys/class/rtc/rtc0/wakealarm && pm-suspend
```

Ethernet (Wake On LAN)

To wake on LAN because of magic packets, configure the ethernet controller to accept magic packets (this is the default):

```
ethtool -s <ethernet interface connected to the development host> wol g
```

To disable wake on LAN, run:

```
ethtool -s <ethernet interface connected to the development host> wol d
```

To remotely wake-up the module, send a magic packet from the development host to it:

```
sudo etherwake -i <ethernet interface the module is connected to> <MAC address>
```

for example:

```
sudo etherwake -i eth1 00:30:d6:10:36:c7
```

USB

Resuming from USB is enabled by default. But as it requires that the USB devices are being powered in standby, this functionality depends on the baseboard. On some baseboards (e.g. for Q7), resuming from USB is therefore not possible.

```
pm-suspend
```

Now press a key on the USB keyboard to resume operation.

E.9. Graphic Output

E.9.1. Dual Head Support

The BSP supports output on multiple displays. The default mode is to clone the display on HDMI/Displayport (named DP-1) and LVDS (named eDP-1).

- To disable a display, run:

```
xrandr --output <display> --off
```

e.g. to disable the HDMI/Displayport display, run:

```
xrandr --output DP-1 --off
```

- To enable a display, run:

```
xrandr --output <display> --auto
```

- To extend the display with LVDS left of the HDMI, run:

```
xrandr --output eDP-1 --left-of DP-1
```

- To clone both displays, run:

```
xrandr --output eDP-1 --same-as DP-1
```

- To change the brightness of the LVDS display to 50%, run:

```
xrandr --output eDP-1 --brightness 0.5
```



LVDS (eDP-1) is always enabled even if no hardware is connected.

E.10. ACPI

ACPI events for buttons (Sleep, Power, LID) are supported but without any default action configured.

By running `acpi_listen`, any buttons pressed will be displayed on the console.

To configure an action, e.g. for the LID button, add a file `/etc/acpi/events/lid-button`.

```
event=button/lid
action=echo "%e" >/dev/console
```

Then run `killall -HUP acpid` to make `acpid` read the new configuration file. The next time the LID button is pressed or released, a message will be printed on the system console.

E.11. Bluetooth

E.11.1. Enabling Bluetooth

On The intel-corei7-64

- At first enable power on the Bluetooth device. Either with:

```
sudo rfkill unblock bluetooth
```

or together with wlan

```
sudo rfkill unblock all
```

- Run the Bluetooth command line interface and make the device discoverable:

```
sudo bluetoothctl
discoverable on
exit
```

This prints the MAC address of the Bluetooth controller, e.g.:

```
[CHG] Controller 78:C4:0E:80:00:77 Discoverable: yes
```

On another Linux system

On another system, e.g. a Linux development host with a USB Bluetooth device, do:

- Run the Bluetooth command line interface:

```
sudo bluetoothctl
```

- List all Bluetooth devices which are discoverable:

```
scan on
devices
```

This will print the MAC address of the bluetooth devices, e.g.:

```
Device 78:C4:0E:80:00:77 BlueZ 5.48
```

- To pair with the device, run:

```
pair <MAC>
```

e.g.:

```
pair 7:C4:0E:80:00:77
```

This will ask you to enter/confirm a key on intel-corei7-64.

- The devices will be cached. For repeated runs, remove the device manually with:

```
remove <MAC>
```

e.g.:


```
remove 78:C4:0E:80:00:77
```

E.12. WLAN


E.12.1. WLAN within msc-image-lxqt

Enabling WiFi

1. Open the network manager as described here: [ConnMan Configuration](#)
2. Select the tab “Wireless”.
3. If the board has WLAN and Bluetooth installed, they might be unpowered. The dialog reports “WiFi Technologies: 1 Found, 0 Powered”.

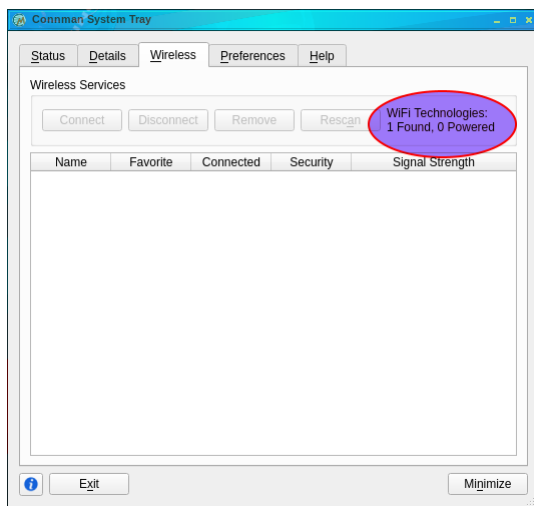

In this case, enable WiFi power on the “Status” tab

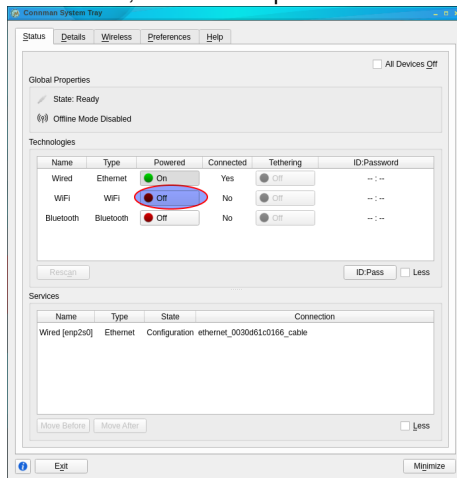

4. The same can be done with the console command:


```
sudo rfkill unblock wlan
```

or, if bluetooth should be enabled as well, with:

```
sudo rfkill unblock all
```

Connect to a WLAN access point

1. Open the network manager and if necessary enable WiFi as described in [Enabling WiFi](#).
2. The network will be scanned automatically and all access points displayed.

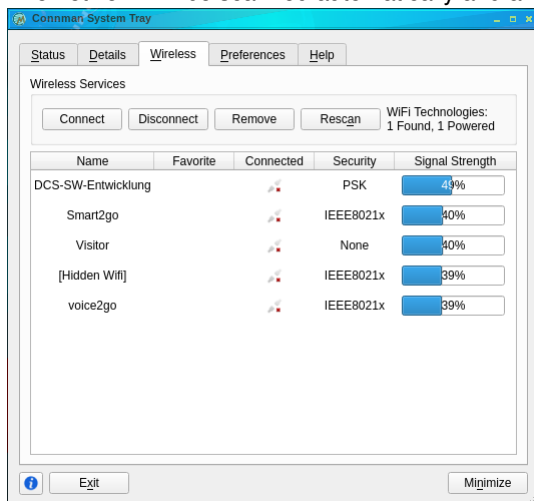

3. Select a network and press the button “Connect”. A dialog will be opened for entering the password.

Agent Input dialog box for WiFi configuration. The dialog has the following sections:

- Passphrase:** A text field containing "my_secure_password" with a clear button. Below it is an "Old Passphrase" field and a "Hide Passphrase" checkbox.
- Hidden Network:** A "Name" text field.
- Service Set Identifier:** An "SSID" text field.
- Wireless Internet Service Provider roaming (WISPr):** "Username" and "Password" text fields.
- Extensible Authentication Protocol (EAP):** An "Identity" text field.
- WiFi Protected Setup (WPS):** A "Use Push Button Authentication" checkbox and a "WPS Pin" text field.

Buttons at the bottom: "OK" and "Cancel".

4. Finally the board will connect to the access point.

Common System Tray Wireless Services window. It shows a list of available WiFi networks with the following columns: Name, Favorite, Connected, Security, and Signal Strength.


Name	Favorite	Connected	Security	Signal Strength
DCS-SW-Entwicklung			PSK	40%
Visitor			None	38%
voice2go			IEEE8021x	38%
[Hidden Wifi]			IEEE8021x	37%
Smart2go			IEEE8021x	36%
TP-LINK_90A4			PSK,WPS	30%

Buttons at the bottom: "Exit" and "Minimize".


Use the board as an access point

To connect devices directly to your MSC board, you can create an access point:


1. Open the network manager and if necessary enable WiFi as described in [Enabling WiFi](#).
2. In the "Status" tab, click on "Off" in the "Tethering" column of the WiFi. This will turn on tethering.

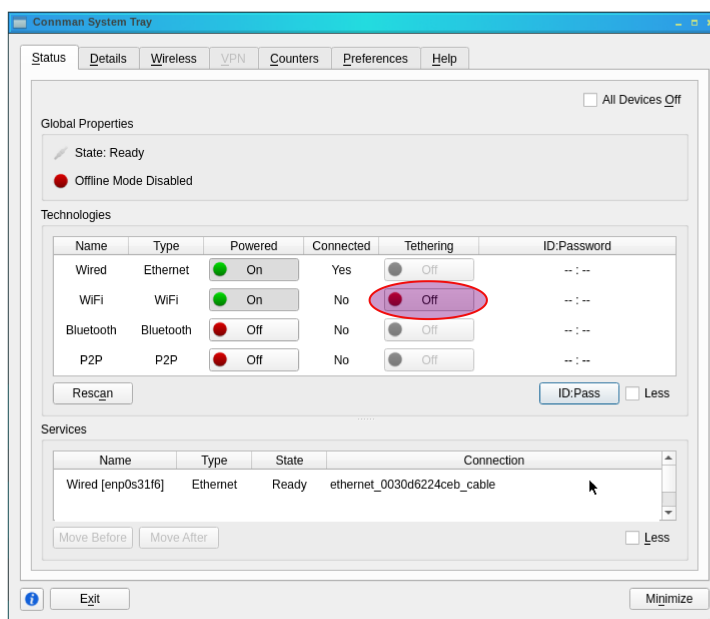


3. A dialog will be opened asking for the name of the access point.




4. Another dialog asking for a password will pop up.



5. The "Status" tab will show that tethering is enabled. The column "ID:password" shows the selected access point name and password. Other devices can now connect to the board.

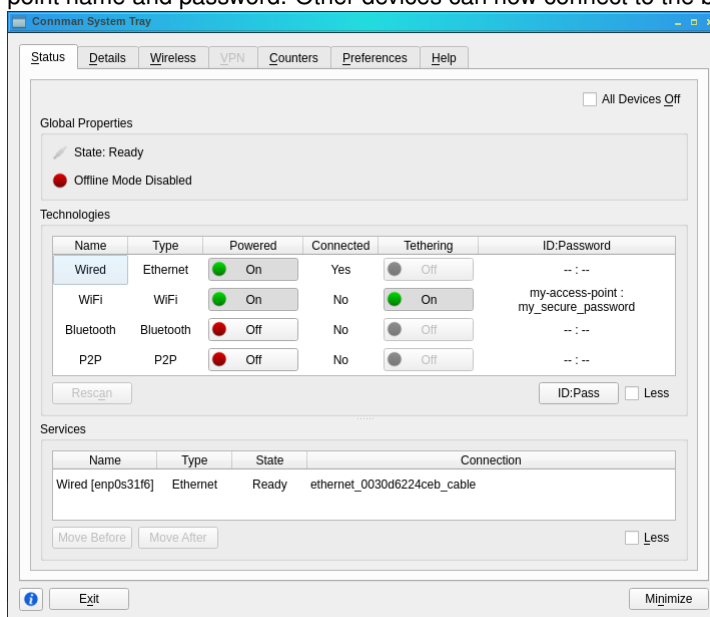

6. To turn off the access point, click on "On" in the "Tethering" column of the WiFi interface. The access point name and password will be remembered by the network manager for later use.

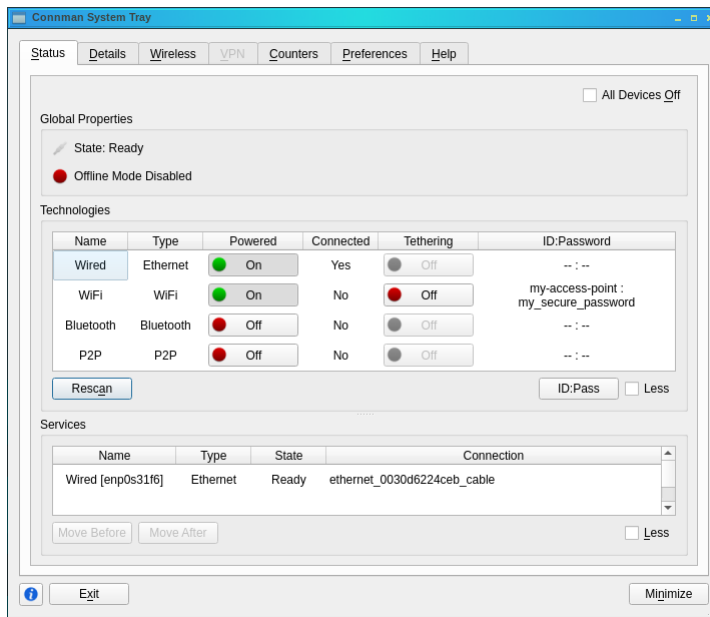

Use the access point for direct connections to other devices:

1. Creating an access point creates a virtual interface "tether" which is assigned an IP address by the network manager:

```
# ifconfig tether
tether    Link encap:Ethernet  HWaddr XX:XX:XX:XX:XX:XX
          inet addr:192.168.0.1  Bcast:192.168.0.255  Mask:255.255.255.0
```

2. Devices that connect to this access point are assigned IP addresses by the network manager's internal DHCP. The access point and all connected devices will be in the same subnet.

F. MSC-IO

F.1. What Is MSC-IO?

MSC-IO provides access to CPU module information and non-plug-and-play hardware devices.

F.2. mscio-setup

`mscio-setup` is called on startup unless the kernel command line option `mscio_disable` is present. It parses the SMBIOS table similar to the tool `dmidecode` and stores the information in an easy to use file based format under `/var/run/mscio/` for non-root applications to access them.

`mscio-setup` also setups hardware devices which are not plug-and-play capable, e.g. the embedded controller on the SMBus. BIOS images for MSC products released after January 2018 add the capability that these devices will be loaded automatically without the need of `mscio-setup`.

F.3. mscio-drivers

For fully supporting the board, some drivers are necessary:

Table F.1. – mscio-drivers

Driver	Feature
<code>eapi_ec</code>	Multi-function master device driver for the embedded controller.
<code>eapi_ec_bl</code>	Driver for the backlight controller on the embedded controller.
<code>eapi_ec_hwm</code>	Driver for the hardware monitoring sensors (temperature, voltage, fan) of the embedded controller.
<code>eapi_ec_running_time</code>	Driver to retrieve the total up-time of the board.
<code>eapi_ec_wdt</code>	Driver for the system watchdog of the embedded controller.
<code>devreg</code>	Driver to register the eapi devices. Used on older BIOS images which don't provide the system information by ACPI.
<code>i2c_ids</code>	Maps the name of the I2C busses to their numbers. This simplifies accessing them as explained in I2C Bus Identification .
<code>user-gpios</code>	Maps the name of the user GPIOs on CPU module to their numbers. This simplifies accessing them as explained in User GPIOs .

F.3.1. Hardware monitoring sensors

To determine the `hwmon` device via which the sensors can be inspected and controlled:

```
ls -l /sys/class/hwmon/hwmon*
```

The correct device for the embedded controller's sensors is the one whose symbolic link contains `i2c-MEX0000:00/eapi_ec_hwm`. In the following explanation `hwmonX` will be used for that device.

The device contains several files for each sensor, each of these following the same naming pattern:

`<sensor type><number>_<function>`

`<sensor type>` is

- `fan` for fan sensors/controls,
- `temp` for temperature sensors and
- `in` for voltage sensors.

<function> is

- `eapi_id` for the sensor's EAPI ID,
- `label` for a human-readable sensor name (e.g. `CPU_TEMP`),
- `input` for the measured sensor value,
- `auto` (fan only) for turning on automatic control mode and
- `duty` (fan only) for controlling the fan speed manually.

To read a sensor value:

```
# fan rotations per minute
cat /sys/class/hwmon/hwmonX/fan1_input
# temperature in degrees millicelsius
cat /sys/class/hwmon/hwmonX/temp1_input
# voltage in millivolt
cat /sys/class/hwmon/hwmonX/in0_input
```

To switch a fan to manual control, write values between 0 and 255 into `fanY_duty`:

```
# Turn fan off manually
echo 0 > /sys/class/hwmon/hwmonX/fan1_duty
# Set fan to 100% duty cycle
echo 255 > /sys/class/hwmon/hwmonX/fan1_duty
```

The values describe a range between 0% and 100% duty cycle. The fan will stay at that duty cycle until the duty cycle is again changed manually or the fan is switched to automatic control mode.

To switch on automatic control:

```
echo 1 > /sys/class/hwmon/hwmonX/fan1_auto
```

The fan will remain under automatic control until it is switched to manual control mode like described above.

F.3.2. Backlight

The backlight of the LVDS or eDP display can be controlled via the backlight device `/sys/class/backlight/eapi_ec_bl`.

The kernel documentation contains a detailed description of the [Backlight API](#).

To change the brightness:

```
# Display brightness
cat /sys/class/backlight/eapi_ec_bl/actual_brightness
255

# Dim it
echo 128 > /sys/class/backlight/eapi_ec_bl/brightness
```

or:

```
mscio-cmd get backlights
eapi_ec_bl,acpi_bl,

mscio-cmd geti backlight_brightness eapi_ec_bl
255

mscio-cmd seti backlight_brightness eapi_ec_bl 128
```



This backlight must be enabled first by setting the BIOS option `Chipset/Flat Panel Configuration/Backlight Control/PWM Control` to `EC`.

F.3.3. Hardware Monitoring

The CPU module features various sensors. They are accessible through the standard linux `hwmon` API interface with a few extensions under `/sys/bus/platform/devices/eapi_ec_hwm/hwmon/` and `/sys/class/`

hwmon/. Sensor values can be read from the files named *_input, human readable names are available in the matching *_label files, e.g. the core voltage from in0_label and in0_input. A unique identification which has the location encoded is available in *_eapi_id.



The ordering of the sensors is not fixed and might change after a reset.

The kernel documentation contains a detailed description of the [HWMON API](#).

An easy way to list all sensor values is by running `mscio-example` which among others lists all sensor devices.

Another approach is to use the tool `mscio-cmd`.

To list all sensors, run:

```
mscio-cmd get sensors
temp1@acpitz,temp2@acpitz,Physical id 0,Core 0,Core 1,Core 2,Core 3,CPU_FAN,SYSTEM_FAN,
CORE_VOLT,3_3V,BATTERY_VOLT,5V,5V_STANDBY,12V,CPU_TEMP,SYSTEM_TEMP,BOARD_TEMP,MEMORY_TEMP
,
```

To read one sensor, run:

```
mscio-cmd get sensor_value 5V
5010mV
```

F.3.4. Running Time

To retrieve the total time in minutes the CPU module has been powered on in its life-time, do:

```
cat /sys/bus/platform/devices/eapi_ec_running_time/minutes
1975
```

or:

```
mscio-cmd get total_running_time
1975min
```

F.3.5. Watchdog

The embedded controller features a watchdog accessible via `/sys/bus/platform/devices/eapi_ec_wdt/watchdog/watchdog*`, e.g. `/sys/bus/platform/devices/eapi_ec_wdt/watchdog/watchdog1`.

As the CPU or baseboard components might provide a watchdog as well the watchdog number might change on reboots.

To start the watchdog:

```
# Trigger every second, reboot after no trigger within 10s
watchdog -t 1 -T 10 -F /dev/watchdog1
# press ctrl-z and wait 10s for a reboot.
```

or:

```
mscio-watchdog start --reset-timeout=10s --trigger-time=1s --watchdog=EAPI_EC_Watchdog
```

The device node can be easily retrieved with:

```
mscio-cmd get watchdogs
iTCO_wdt,EAPI_EC_Watchdog,

mscio-cmd geti watchdog_device EAPI_EC_Watchdog
/dev/watchdog1
```

The driver can be configured to be not stoppable via the kernel command line parameter `eapi_ec_wdt.nowayout=1`. It can also be configured to not require a magic character when closing the device `eapi_ec_wdt.magic_close=0`.



A reconfiguration of the watchdog will stop and then restart it.

F.3.6. User GPIOs

If the BIOS or bootloader provides a user GPIO mapping it can be located at `/sys/bus/acpi/devices/MEX0001:00/physical_node/gpios`. For each GPIO a file with its linux number exists, e.g. `GPIO0` or `GPO3`. GPIOs named `GPO` should be used only for output, GPIOs named `GPI` only for inputs.

To read a GPIO with the linux API, do:

```
GPIO=$(cat /sys/bus/acpi/devices/MEX0001:00/physical_node/gpios/GPI0)
cd /sys/class/gpio
echo ${GPIO} >export
cd gpio${GPIO}
echo in >direction
cat value
```

Inputs can be used as interrupts when the file `edge` exists.

The kernel documentation contains a detailed description of the [GPIO API](#).

An easy way to list all GPIOs is by running `mscio-example`:

```
GPIO
Name: GPIO0
Number: 456
CanInput: 1
CanOutput: 0
CanInterrupt: 1
IsInput: 1
Value: 1
```

Another approach is to use the tool `mscio-cmd`.

To list all GPIOs, run:

```
mscio-cmd get gpios
GPIO0,GPIO1,GPIO2,GPIO3,GPO0,GPO1,GPO2,GPO3,
```

To read the states of all input pins, do:

```
mscio-cmd get-gpio-values
GPIO0=1
GPIO1=0
GPIO02=0
GPIO03=1
```

If the output pins are connected to LEDs, a visual inspection of all output pins is possible using the following:

```
mscio-cmd gpio-blink
```

This turns off all LEDs, then separately lights every one in the order of their names. At the end, all LEDs light up together and are then turned off again.

To read the current state of a single pin, do:

```
mscio-cmd seti gpio_config GPIO0 in
mscio-cmd geti gpio_value GPIO0
1
```

After the GPIO has been configured as an input, it is possible to wait for interrupts.

```
mscio-cmd wait-for-gpio-interrupt --mode=rising --timeout=2s GPIO0
GPIO level after interrupt: 1
```

Verify that an interrupt has been raised with:

```
cat /proc/interrupts|grep gpiolib
217:          0          0          2          0 intel-gpio  96 gpiolib
```

To set the current state to high, do:

```
mscio-cmd seti gpio_config GPO0 high
# or
mscio-cmd seti gpio_config GPO0 1
```



Support for GPIOs must first be enabled with the BIOS option Advanced/Module-specific Initialization/GPIO Controller.

F.3.7. NVRAM

The CPU modules typically have an EEPROM attached which has some space reserved for the user. As some of the space might be used by the system, it is recommended to access the EEPROM using `mscio-cmd` which ensures that only the user area is used.

At first determine the available space.

```
mscio-cmd geti nvram_size EAPI-0
64B
```

To read 64 bytes as a hex string:

```
mscio-cmd read EAPI-0 0B 64B
11cc22ddffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffffff
```

F.3.8. Board Information

The location of board information like serial numbers, hardware revision or the platform type depends on the actual hardware. It is therefore recommended to use the following tools.

To print everything known, do:

```
mscio-example
```

To just retrieve the serial number, do:

```
mscio-cmd get board_serial
1004301002
```

F.3.9. I2C Bus Identification

A common problem on some platforms, especially x86, is the random assignment of the I2C bus numbers, for example `/dev/i2c-0`. When multiple I2C controllers are available, the numbers are assigned in a first initialized order. With parallel initialization the order might change on kernel changes or even after reboots.

The current assignment can be analyzed with this command:

```
root@intel-corei7-64:~# i2cdetect -l
i2c-3    i2c          DPDDC-B          I2C adapter
i2c-1    i2c          i915 gmbus dpb    I2C adapter
i2c-6    smbus         SMBus I801 adapter at f040 SMBus adapter
i2c-4    i2c          DPDDC-C          I2C adapter
i2c-2    i2c          i915 gmbus dpd    I2C adapter
i2c-0    i2c          i915 gmbus dpc    I2C adapter
i2c-5    i2c          Synopsys DesignWare I2C adapter I2C adapter
```

Sometimes the bus number can be determined by grepping for the name, e.g. `SMBus I801 adapter at f040`. But this fails when multiple instances of this name are present.

Another way is to use the physical path as a base and looking for a directory with the name `i2c-*` below the PCI device of the controller, e.g. `/sys/bus/pci/devices/0000:00:15.0`.

Both approaches are error prone. Therefore a third option exists. On modern MSC boards the BIOS provides an ACPI device `MEX0002` or `MEX00002`. The driver `i2c_ids` creates mapping files that contain the I2C bus number which can be found in the directory. `/sys/bus/acpi/devices/MEX0002:00/physical_node/i2c_ids`.

```
root@intel-corei7-64:/sys/bus/acpi/devices/MEX0002:00/physical_node/i2c_ids# ls
smbus  user
root@intel-corei7-64:/sys/bus/acpi/devices/MEX0002:00/physical_node/i2c_ids# cat smbus
6
root@intel-corei7-64:/sys/bus/acpi/devices/MEX0002:00/physical_node/i2c_ids# cat user
5
```

The numbers can be used to access the related `/dev/i2c-*` device

MSC products use the name `smbus` for the dedicated SMBus of the board. Dito `user` is used for the I2C bus reserved for user applications. Some boards might even feature more mappings.

Furthermore the I2C tools of MSC-LDK have been extended to use these features.

`i2cdetect -l` now reports these mappings as `*link*`


```
root@intel-corei7-64:~# i2cdetect -l
i2c-0    i2c          i915 gmbus dpc          I2C adapter
i2c-5    i2c          Synopsys DesignWare I2C adapter  I2C adapter
i2c-5    *link*       user                  ID mapped
i2c-6    *link*       smbus                 ID mapped
```

If can be used as well as the bus parameter in some commands, e.g. `i2cdetect user` instead of `i2cdetect 0` or `i2cdump user 0x56` instead of `i2cdump 0 0x56`.

F.4. mscio-monitor

This is a Qt based front-end to MSC-IO included in the `msc-image-lxqt` and `msc-image-sato`.

Figure F.1. – mscio-monitor

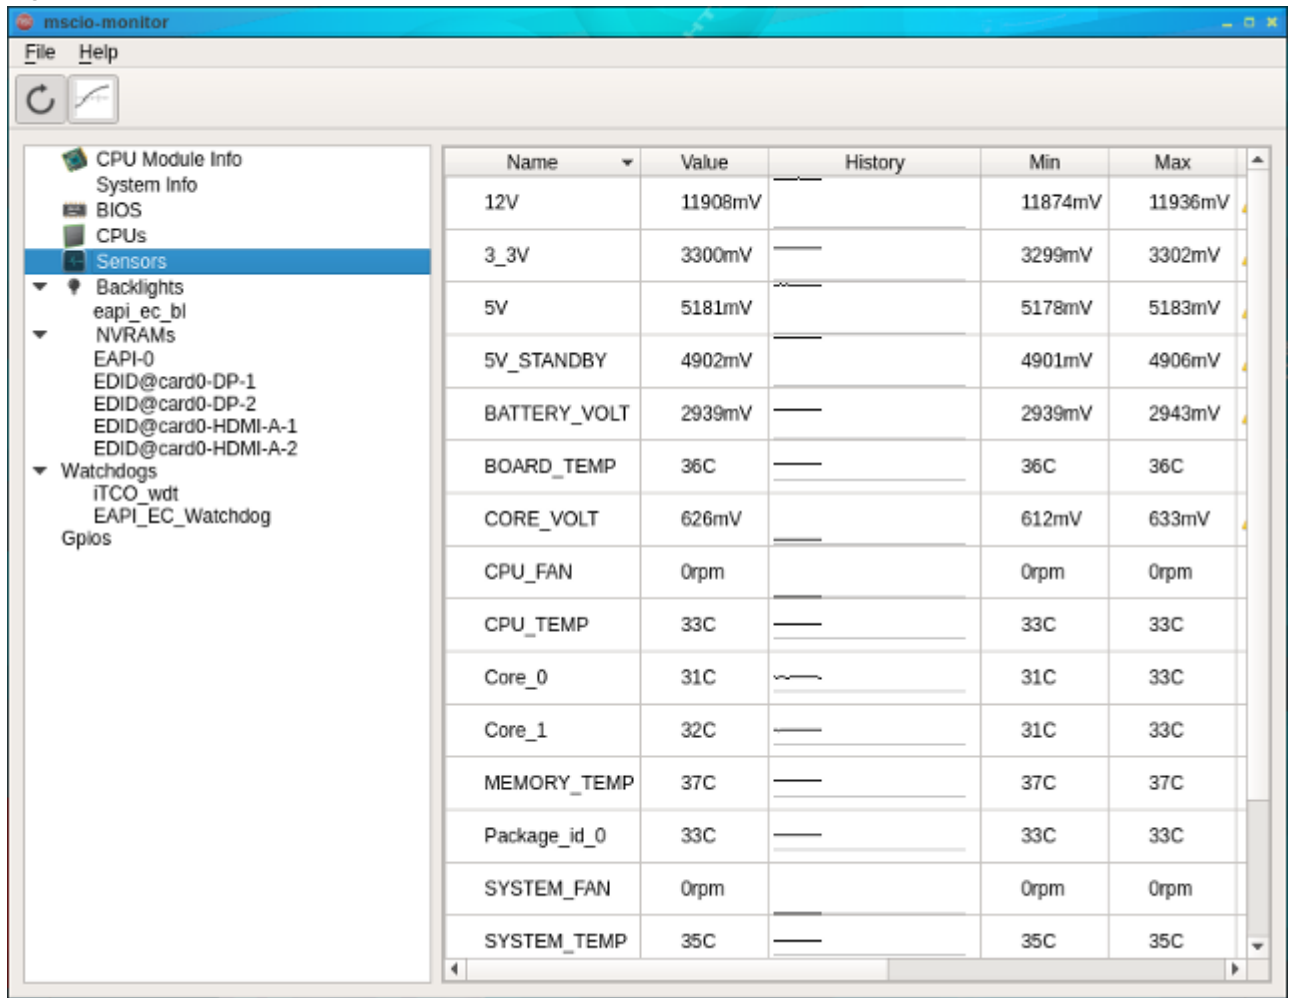

F.5. User Library

Userspace application can access these devices with the raw kernel API or by using the package `mscio-lib`.

```
#include <iostream>
#include <msc/MscIo-3/MscIo.h>

using namespace Msc::MscIo;
using namespace std;

int main()
{
    MscIo mscio;
    mscio.Init();

    for (const auto& s : mscio.Sensors())
    {
        cout << "Sensor" << endl
              << "  Name: " << s->Name() << endl
              << "  Value: " << s->ToString() << endl;
    }

    mscio.DeInit();

    return 0;
}
```

File F.1 – example.cpp

It can be compiled with:

```
c++ -std=c++1z -o example example.cpp -l MscIo -lMscBoost
```

Output is:

Sensor

 Name: CPU_TEMP

 Value: 32C

Sensor

 Name: SYSTEM_TEMP

 Value: 35C

G. Troubleshooting

Table G.1. – Errors

Symptom	Solution
gitolite@msc-git02.msc-ge.com asks for password	Register as described here: Registration On The MSC Git Server
telnet login takes a few seconds after entering the password	A reverse DNS is performed to identify the login user. Either setup a local DNS server or change the <code>hosts</code> line in <code>/etc/nsswitch.conf</code> on the target to this: <code>hosts: files</code>

H. Tips And Tricks

H.1. Using A Standard Browser

The image `m3c-image-lxqt` includes the `otter-browser`. This is a small Qt5 based browser which is suitable for most web pages. If it is not sufficient other browsers like `google-chrome` or `firefox` can be installed instead via the layer <https://github.com/OSSystems/meta-browser>.

H.1.1. Using The google-chrome Browser

For example, to use `google-chrome` instead of `otter-browser`, do:

```
user@devhost:m3c-ldk$ ./setup.py --bsp=01011 -layers-lxqt -layers-browser-chrome-instead-of-otter
```



Be aware that the compilation requires an additional 100GB and can take more than 2hours just for `chrome`.

H.2. Timekeeping

Having the exact time on a device is essential otherwise various internet protocols, e.g. HTTPS, are not working. Yet the RTC on the modules has a drift and should be therefore synchronized regularly. This chapter describes possible ways.

H.2.1. htptime

If the device is behind a network proxy, the NTP protocol might be blocked by the firewall. There is a non-standard way to retrieve times using `htptime` which is able to work with standard HTTP proxies.

To retrieve the current time from an HTTP server with debugging output (`-d`) and without a proxy use and set the system time:

```
htptime -d www.google.com
```

If a HTTP proxy is configured, it must be provided on the command line:

```
htptime -d -P ${http_proxy} www.google.com
```

Set the system time with (`-s`). For a better accuracy more and at best local web servers should be provided on the command line as well.

```
htptime -s -P ${http_proxy} www.google.de www.kernel.org www.heise.de
```

To update the RTC, do:

```
hwclock --systohct
```

I. Security

I.1. Introduction

Computer security is huge and important topic. Therefore Yocto offers some dedicated layers to

- a) Analyze the created image and provide feedback about detected weak spots.
- b) Increase the security of a running system.

I.2. Layer meta-security-isafw

The layer `meta-security-isafw` allows to enable the Image Security Analysis Framework (isafw) for your image builds. Further information about isafw can be found here: <https://github.com/01org/isafw>.

Adding the following line in `local.conf` enables a post processing step after the image creation: `INHERIT += "isafw"`

In that post processing step are several checks performed and the result is written to `build/01011*/tmp/log/isafw-report*/:`

CFA : Analyze executables on the image

RELRO : <http://tk-blog.blogspot.de/2009/02/relro-not-so-well-known-memory.html>

Canary stack protection : <https://lwn.net/Articles/584225/>

Position Independent Executable : <https://securityblog.redhat.com/2012/11/28/position-independent-executables-pie/>

Memory Protection Extensions (MPX) : https://software.intel.com/sites/default/files/managed/9d/f6/Intel_MPX_EnablingGuide.pdf

CVE vulnerabilities : A list of not yet fixed CVE vulnerabilities.

FSA : SETUID, SETGID, World-writable files, World-writable dirs

KCA : Kernel settings

LA : Undesired recipe licenses

These reports can be used to improve your image step by step. Please note that security tools report a lot of possible problems and that almost no system fixes all of them. There is always a trade-off between security, usability and the amount of time that is invested to harden a system.



Using the layer `meta-security-isafw` is a good starting point to detect potential weak spots of the built Yocto images.

I.3. Setting Up A Project

`setup.py` will activate the `layermeta-security-isafw` when it is invoked with the additional switch `--layers-security`. For example:

```
user@devhost:msc-ldk$ ./setup.py --bsp=01011 --layers-lxqt --layers-security
user@devhost:msc-ldk$ cd build/01011*-security
user@devhost:msc-ldk/build/01011*-security$ make msc-image-lxqt
```

J. Real-time

J.1. What Is Real-time

Real-time is the capability of an operating system to react on a request within a defined time. There are various categories.

- Hard Real-time - The operating system ensures that it can react to any event within a maximum time.
- Soft Real-time - The operating system is capable to react on most events within a maximum time. Some sporadic events might take longer, e.g. error handling or too many parallel interrupts requests.

Modern standard kernels are considered soft real-time. They reduce the overall latency and improve preemption. To further boost preemption Yocto includes the [PREEMPT_RT patches](#) for its standard kernels.

J.2. Setup A BSP For Real-time Support

To build an image with real-time support two requirements must be met:

1. The kernel must have included and enabled the real-time patches.
2. User-space tools for real-time configuration and analysis should be included in the image.

This can be achieved by setting up the BSP as:

```
user@devhost:msc-ldk$ ./setup.py --bsp=01011 --layers-lxqt --layers-rt
user@devhost:msc-ldk$ cd build/01011*-lxqt-rt
user@devhost:msc-ldk/build/01011*-lxqt-rt$ make msc-image-lxqt
```

To check that the running system has real-time support enabled:

- `/proc/version` must contain the string `PREEMPT_RT`, e.g.
`Linux version 4.8.3-rt2-yocto-preempt-rt (buildserver@destsm3ux05bs01.emea.avnet.com) (gcc version 6.2.0 (GCC) ) #3 SMP PREEMPT RT Mon Apr 3 10:37:02 CEST 2017`
- The kernel must have full preemption enabled:

```
gunzip -c /proc/config.gz | grep CONFIG_PREEMPT_RT_FULL=y
CONFIG_PREEMPT_RT_FULL=y
```
- The file `/usr/bin/cyclicttest` must be present.

J.3. Analysis Of Real-time Behavior

J.3.1. Yocto Tracing And Profiling

Detailed tracing of kernel activity can be enabled using [trace-cmd](#).

Requirements

Tracing requires the tool [kernelshark](#).

This can be installed on ubuntu with:

```
sudo apt-get install trace-cmd kernelshark
```

Tracing System Calls


To trace the system calls of `sleep`, do:

```
root@intel-corei7-64:~# trace-cmd record -o trace.dat -e "syscalls:*" -F sleep 1
```

The results can then be viewed on the host after copying `trace.dat` to the host or sharing it by an NFS mounted directory with:

```
$ kernelshark trace.dat
```

Figure J.1. – kernelshark - systemcalls

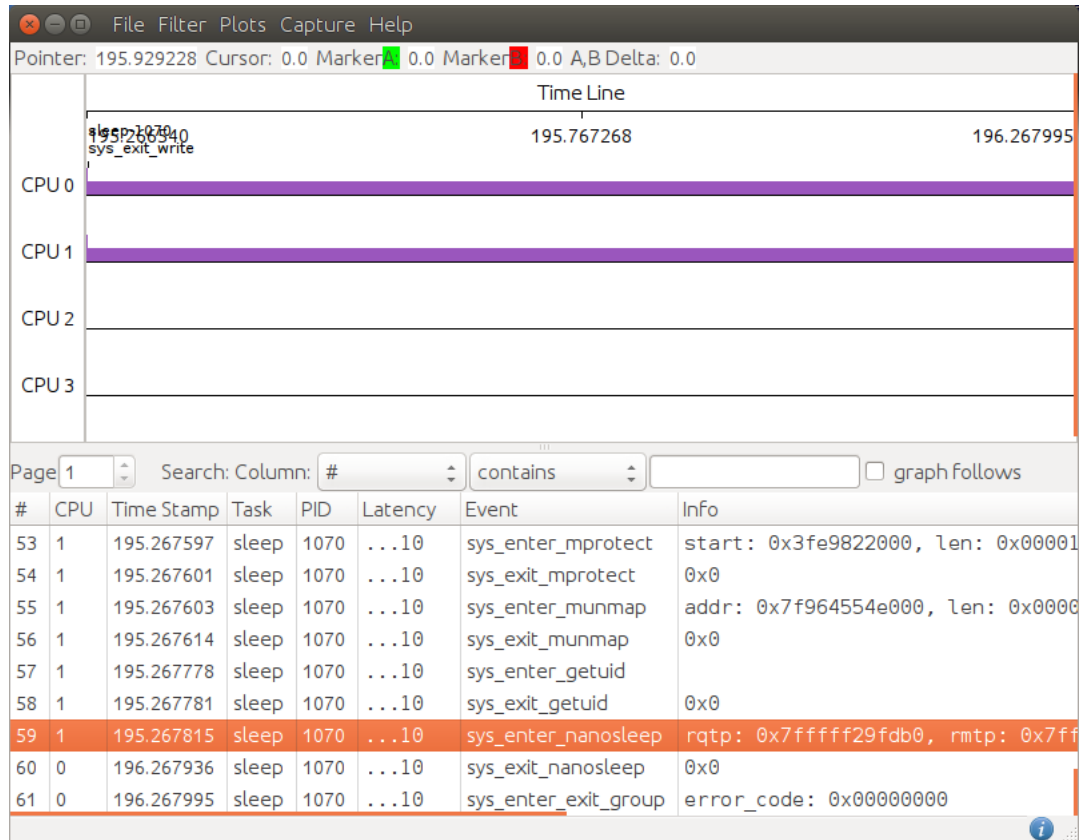


Tracing Kernel Events

To have a more detailed view of the system, do:

```
root@intel-corei7-64:~# trace-cmd record -o trace.dat -e "*" -F sleep 1
```

Then search in kernelshark for `sys_enter_nanosleep` and then scroll the following events until `sys_exit_nanosleep` appears.

Figure J.2. – kernelshark - events

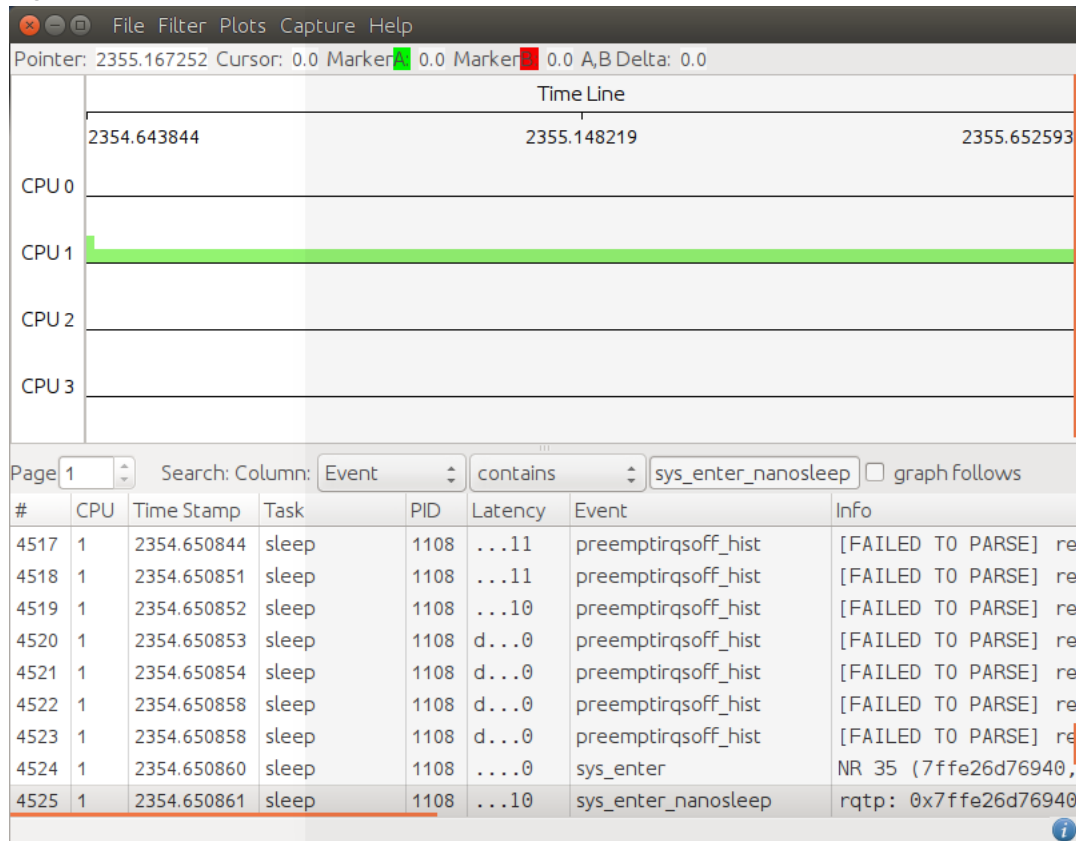

A function stack trace can be added to the report. This might require an increase of the trace buffer size.


```
root@intel-corei7-64:~# trace-cmd record -b 8192 -T -o trace.dat -e "*" -F sleep 1
```

Tracing IRQs

If the option `-F` is omitted by `tracecmd` all events on the system will be reported. This comes in handy for IRQ analysis.

```
root@intel-corei7-64:~# trace-cmd record -o trace.dat -e "irq:*
```

Figure J.3. – kernelshark - IRQs

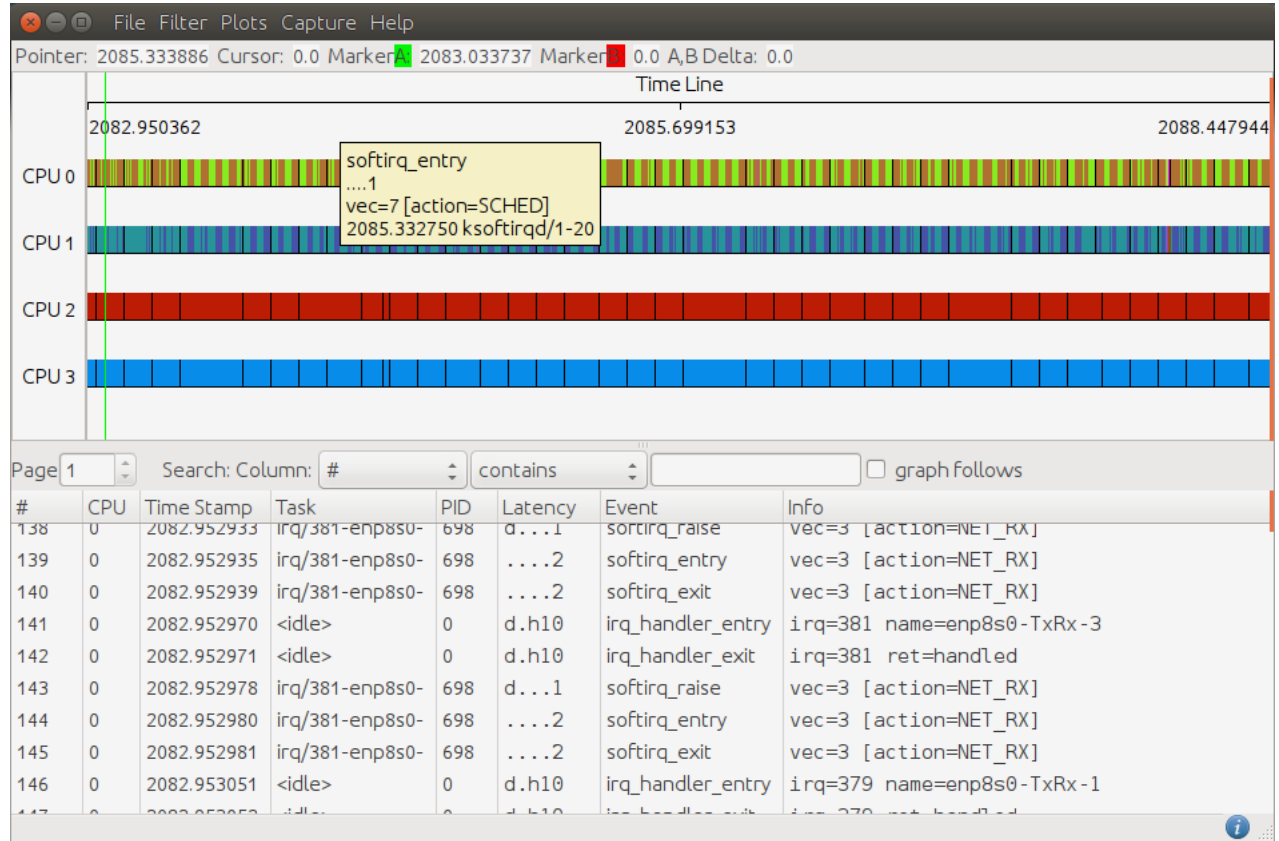

J.3.2. Application List With Real-Time Priorities

To list all applications with their real-time priorities use the command

```
ps -Hxo pid,s,psr,cls,rtprio,comm
```

This will display all processes with their process ID, their state (sleeping or running), the CPU (0...3), the real-time class (TS=Other, FF=real-time fifo, RR=real-time round-robin), the real-time priority from 1 (lowest) to 99 (highest) when class is FF or RR and finally the command name.

```
PID S PSR CLS RTPRIO COMMAND
  1 S  0 TS      - init
  2 S  1 TS      - kthreadd
  3 S  0 TS      - ksoftirqd/0
  4 S  0 FF      1 ktimersoftd/0
  6 S  0 TS      - kworker/0:0H
  8 S  0 FF     51 rcu_preempt
  9 S  1 FF     51 rcu_sched
 10 S  0 FF     51 rcub/0
 11 S  0 FF     51 rcuc/0
 13 S  0 FF     99 posixcpumr/0
 14 S  0 FF     99 migration/0
 17 S  1 FF     99 migration/1
 26 S  2 FF     51 rcuc/2
 35 S  3 FF     51 rcuc/3
 82 S  1 FF      1 i915/signal:0
120 S  0 FF     50 irq/41-mmc0
121 S  1 FF     49 irq/41-s-mmc0
122 S  0 FF     50 irq/348-0000:00
1052 S  1 TS      - sh
1057 S  1 TS      - kworker/u8:0
1064 T  0 TS      - cyclicttest
1064 T  3 RR     40 cyclicttest
1067 R  1 TS      - ps
```

- There are some threads like `migration` and `posixcpumr` that are required for real-time management and therefore run with priority 99.
- Then there are the `rcuc` threads which are necessary for sharing resources with the other CPUs. Their priority is defined by the kernel variable `CONFIG_RCU_KTHREAD_PRIO` and is set to 51. Real-Time applications should have a priority lower than this value.
- Below it are the interrupt handlers and userspace real-time applications.
- Then there are the non-real-time kernel worker threads and user-space applications.

Even an isolated CPU 3 will always be used by some kernel threads.

```
root@intel-corei7-64:~# ps -Hxo pid,s,psr,cls,rtprio,comm|grep "  3  "
 33 S  3 TS      - cpuhp/3
 34 S  3 FF     99 migration/3
 35 S  3 FF     51 rcuc/3
 36 S  3 FF      1 ktimersoftd/3
 37 S  3 TS      - ksoftirqd/3
 38 S  3 TS      - kworker/3:0
 39 S  3 TS      - kworker/3:0H
 40 S  3 FF     99 posixcpumr/3
156 S  3 TS      - kworker/3:1
```

J.4. Latency

The system latency can not be calculated on a modern system. It is influenced by too many variables:

- Two or three level caches
- DMA transfers, especially to PCI devices
- Displays and shared frame buffers (continuous DMA)
- Hardware interrupts
- Multiple cores
- Operating system scheduling
- System management interrupts and non-maskable interrupts
- Automatic clock frequency adaption, e.g. `intel_pstate` driver

the other two cores can be used for the real-time applications and necessary kernel management.

This can be achieved by adding the kernel command line option `isolcpus=2,3`

The real-time application can then be manually placed on the fourth CPU using `taskset`, e.g.

```
root@intel-corei7-64:~# taskset -c 3 cyclicttest
```



If hyper-threading is used both virtual cores of the physical core should be isolated as they share the same cache.

Interrupt Affinity

Interrupts can be isolated so they are served only on specific CPUs. Typically Linux will try to process the interrupts on the same core 0 to avoid instruction cache updates.

In some cases it might be best to place the hardware interrupt handler to an isolated CPU as well so the interrupt handler resides in the instruction cache. This can be achieved by modifying its affinity.

For example, to ensure that the SMBus Interrupts are handled only by core 2 and all other interrupts on one:

- On the kernel command line set the `irq-affinity` to the cores 0 and 1.

```
irqaffinity=0,1
```

Hardware interrupts but not timer and management interrupts will now be handled by core 0.

- Determine the interrupt number of the SMBus

```
cat /proc/interrupts |grep smbus
20:                6                0                0                0    IO-APIC    20-fastecoi    i801_smbus
```

The interrupt number is 20.

- Determine the SMP affinity of interrupt 20. `smp_affinity` is a bit-mask for the allowed cores.

```
cat /proc/irq/20/smp_affinity
3
```

- Move it to core 2.

```
echo 4 >/proc/irq/20/smp_affinity
```

- Ensure that further interrupts are now handled by core 2.

```
root@intel-corei7-64:/proc/irq# i2cdetect -l
[...]
i2c-5    smbus                SMBus I801 adapter at f040                SMBus adapter
root@intel-corei7-64:/proc/irq# i2cdetect -y 5
[...]
root@intel-corei7-64:/proc/irq# cat /proc/interrupts |grep smbus
20:                6                0            116                0    IO-APIC    20-fastecoi    i801_smbus
```

Avoiding Sleeps

With standard BIOS settings the CPU will enter higher c-states when possible to reduce power consumption. As waking up requires a lot of time the CPU should be always fully turned on. This can be achieved by the kernel command line options `isolcpus=2,3 intel.max_cstate=0`

Constant Clock

Both the hardware and the operating system have the possibility to change the clock frequency based on the demand to save power when not needed. As clock frequencies can differ by factor two or more this has a great impact when waiting for events on waking up on them.

The automatic hardware adaption can be disabled by using the kernel command line option `intel_pstate=disable`

To disable software adaption select a different governor. At first determine the current settings.

```
root@intel-corei7-64:~# msc-cpufreq
CPU0: ondemand: 1000 MHz (800 MHz .. 1.60 GHz)
CPU1: ondemand: 1.60 GHz (800 MHz .. 1.60 GHz)
CPU2: ondemand: 800 MHz (800 MHz .. 1.60 GHz)
CPU3: ondemand: 800 MHz (800 MHz .. 1.60 GHz)
```

Some CPUs allow different governors for selected CPUs. Select the performance governor for maximum clock on these CPUs.

```
root@intel-corei7-64:~# for c in cpu2 cpu3; do echo performance >/sys/devices/system/cpu/$c/cpufreq/scaling_governor; done
```

And verify the new settings with:

```
root@intel-corei7-64:~# msc-cpufreq
CPU0: ondemand: 800 MHz (800 MHz .. 1.60 GHz)
CPU1: ondemand: 1.60 GHz (800 MHz .. 1.60 GHz)
CPU2: performance: 1.60 GHz (800 MHz .. 1.60 GHz)
CPU3: performance: 1.60 GHz (800 MHz .. 1.60 GHz)
```

J.4.4. Summary

The shortest latencies can be achieved using the kernel command line options:

```
intel_pstate=disable isolcpus=2,3 intel.max_cstate=0 processor.max_cstate=0
```

K. Power Analysis

Various tools exist to analyse the power consumption and state changes of the CPU. They help to get an understanding when and why the kernel switches CPU core states and changes CPU core clock. With this information it is possible to adjust the system, e.g. with `taskset`, so more cores can run idle and the system use less power.

The most import CPU core states are:

Table K.1. – CPU core states

Mode	Description
C0	CPU fully turned on
C1	The main CPU clocks used for executing instructions are stopped, all others are still on
C3	All internal CPU clocks are stopped.
C6	All internal CPU clocks are stopped and internal voltage is reduced.

Depending on the CPU more modes might be available.

K.1. cpupower

`cpupower` lists the percentages the system is in the various CPU core states.

```
root@intel-corei7-64:~# cpupower monitor
|Nehalem          || Mperf          || Idle_Stats
CPU | C3 | C6 | PC3 | PC6 || C0 | Cx | Freq || POLL | C1 | C2 | C3
0 | 0.00 | 99.62 | 0.00 | 0.00 || 0.17 | 99.83 | 1792 || 0.00 | 0.17 | 0.00 | 99.68
1 | 0.00 | 99.85 | 0.00 | 0.00 || 0.14 | 99.86 | 1792 || 0.00 | 0.00 | 0.00 | 99.87
2 | 0.00 | 99.98 | 0.00 | 0.00 || 0.02 | 99.98 | 1823 || 0.00 | 0.00 | 0.00 | 99.99
3 | 0.00 | 0.00 | 0.00 | 0.00 || 100.2 | -0.16 | 1792 || 0.00 | 0.00 | 0.00 | 0.00
```

The CPU is mostly in the C6 state while CPU 3 is busy serving one application.

K.2. powertop

`powertop` reports the activity on the system, e.g. events and processes actively using CPU, the CPU states being used, the CPU frequency distribution and the load of the physical devices. It also supports power tuning I/O devices. More documentation is available on its [homepage](#).

Figure K.1. – powertop overview

PowerTOP 2.8

Overview

Idle stats

Frequency stats

Device stats

Tunables

Summary: 15.1 wakeups/second, 0.0 GPU ops/seconds, 0.0 VFS ops/sec and 1.2% CPU use

Usage	Events/s	Category	Description
89.9 us/s	4.8	kWork	fb_flashcursor
9.5 ms/s	0.20	Process	powertop
56.1 us/s	3.0	Process	[rcu_preempt]
278.6 us/s	2.5	Timer	tick_sched_timer
95.9 us/s	1.1	Process	/usr/sbin/ntpd -u ntp:ntp -p /var/run/ntpd.pid -g
19.1 us/s	1.0	kWork	pci_pme_list_scan
134.8 us/s	0.7	Interrupt	[7] sched(softirq)
84.6 us/s	0.4	kWork	igb_watchdog_task
25.3 us/s	0.3	Interrupt	[3] net_rx(softirq)
14.1 us/s	0.20	Process	init
3.8 us/s	0.20	kWork	flush_to_ldisc
7.5 us/s	0.15	kWork	vmstat_shepherd
265.3 us/s	0.00	Interrupt	[9] RCU(softirq)
119.3 us/s	0.05	kWork	drm_fb_helper_dirty_work
192.0 us/s	0.00	Process	[kworker/2:1]
180.4 us/s	0.00	Timer	cursor_timer_handler
164.9 us/s	0.00	Interrupt	[1] timer(softirq)
6.1 us/s	0.05	Process	[ksoftirqd/2]
3.5 us/s	0.05	Process	[ksoftirqd/1]
1.8 us/s	0.05	Process	/usr/sbin/rpcbind
1.8 us/s	0.05	Process	[ksoftirqd/0]
0.4 us/s	0.05	kWork	work_fn

<ESC> Exit

<TAB> / <Shift + TAB> Navigate

L. Known Issues

L.1. I2C Kernel Errors

The kernel reports these kernel errors when booting:

```
[ 2.228386] idma64: probe of idma64.0 failed with error -22
[ 3.568182] i2c_designware i2c_designware.0: failure requesting irq 31: -22
[ 3.569112] i2c_designware: probe of i2c_designware.0 failed with error -22
```

They are due to the BIOS having enabled but not correctly setup the unusable but required I2C port 4.

M. Links

- MSC Technologies <http://www.msc-technologies.eu>
- Yocto project <https://www.yoctoproject.org>
- Yocto project documentation
<http://www.yoctoproject.org/docs/3.0.1/mega-manual/mega-manual.html>
- LXQt <http://lxqt.org>
- Otter Browser <https://otter-browser.org>

N. License Overview

Table N.1. – list of licenses used in this build

Licenses		
((GPLv2+ & LGPLv2.1+) (GPLv3+ & LGPLv3+))	(GPL-2.0+ LGPL-3.0 The-Qt-Company-Commercial)	(GPL-2.0+ LGPL-3.0)
(GPL-3.0 & The-Qt-Company-GPL-Exception-1.0 The-Qt-Company-Commercial)	(GPL-3.0 & The-Qt-Company-GPL-Exception-1.0)	(GPLv2+ LGPLv3)
(MPL-2.0 & GPL-2.0+)	(MPL-2.0 & LGPL-2.1+)	AFL-2.1
Apache-2.0	Artistic-1.0	BSD
BSD-2-Clause	BSD-3-Clause	BSD-4-Clause
BSL-1.0	CC-BY-SA-3.0	Firmware-Abilis
Firmware-GPLv2	Firmware-IntcSST2	Firmware-Marvell
Firmware-OLPC	Firmware-adsp_sst	Firmware-agere
Firmware-amd-ucode	Firmware-amdgpu	Firmware-amlogic_vdec
Firmware-ath9k-htc	Firmware-atheros_firmware	Firmware-atmel
Firmware-broadcom_bcm43xx	Firmware-ca0132	Firmware-cavium
Firmware-chelsio_firmware	Firmware-cw1200	Firmware-cypress
Firmware-dib0700	Firmware-e100	Firmware-ene_firmware
Firmware-fw_sst_0f28	Firmware-go7007	Firmware-hfi1_firmware
Firmware-i2400m	Firmware-i915	Firmware-ibt_firmware
Firmware-imx-sdma_firmware	Firmware-it913x	Firmware-iwlwifi_firmware
Firmware-kaweth	Firmware-moxa	Firmware-myri10ge_firmware
Firmware-netronome	Firmware-nvidia	Firmware-phanfw
Firmware-qat	Firmware-qcom	Firmware-qla1280
Firmware-qla2xxx	Firmware-qualcommAthos_ar3k	Firmware-qualcommAthos_ath10k
Firmware-r8a779x_usb3	Firmware-radeon	Firmware-ralink-firmware
Firmware-ralink_a_mEDIATEK_company_firmware	Firmware-rtwifi_firmware	Firmware-siano
Firmware-tda7706-firmware	Firmware-ti-connectivity	Firmware-ti-keystone
Firmware-ueagle-atm4-firmware	Firmware-via_vt6656	Firmware-wl1251
Firmware-xc4000	Firmware-xc5000	Firmware-xc5000c
FreeType	GFDL-1.2	GFDL-1.3
GPL-1.0+	GPL-2+	GPL-2.0
GPL-2.0+	GPL-2.0-with-OpenSSL-exception	GPL-3.0-with-GCC-exception
GPLv1	GPLv2	GPLv2+
GPLv2.0+	GPLv3	GPLv3+
ICU	ISC	Intel-Microcode-License
LGPL-2.0+	LGPL-2.1	LGPL-2.1+
LGPL-3.0	LGPLv2	LGPLv2+
LGPLv2.0+	LGPLv2.1	LGPLv2.1+
LGPLv3	LGPLv3+	Libpng
MIT	MIT-X	MIT-style
MPL-1.1	MPL-2.0	MPLv1.1
NTP	OFL-1.1	PD
PSF	PSFv2	Python-2.0
SGIv1	Sleepycat	The-Qt-Company-Commercial
WHENCE	Zlib	bzip2
openssl	zsh	

Table N.2. – License overview listing

Recipe	Version	Licenses
acl <i>acl</i>	2.2.52 <i>libacl</i>	GPLv2+
acpica <i>acpica</i>	20190816	BSD, GPLv2
acpid <i>acpid</i>	2.0.32	GPLv2+
adwaita-icon-theme <i>adwaita-icon-theme-symbolic</i>	3.32.0	LGPL-3.0, CC-BY-SA-3.0
alsa-lib <i>alsa-conf</i>	1.1.9 <i>alsa-lib</i>	LGPLv2.1, GPLv2+
alsa-plugins <i>alsa-plugins-pulseaudio-conf</i> <i>libasound-module-ctl-pulse</i>	1.1.9 <i>libasound-module-conf-pulse</i> <i>libasound-module-pcm-pulse</i>	LGPLv2.1, GPLv2+
alsa-state <i>alsa-state</i>	0.2.0 <i>alsa-states</i>	MIT
alsa-utils <i>alsa-utils</i> <i>alsa-utils-alsactl</i> <i>alsa-utils-alsamixer</i> <i>alsa-utils-alsaucm</i> <i>alsa-utils-aplay</i> <i>alsa-utils-aseqnet</i> <i>alsa-utils-midi</i>	1.1.9 <i>alsa-utils-aconnect</i> <i>alsa-utils-alsaloop</i> <i>alsa-utils-alsatplg</i> <i>alsa-utils-amixer</i> <i>alsa-utils-aseqdump</i> <i>alsa-utils-iecset</i> <i>alsa-utils-speakertest</i>	GPLv2+
app-defaults <i>app-defaults</i>	1.0	MIT
at-spi2-atk <i>at-spi2-atk</i>	2.32.0	LGPLv2
at-spi2-core <i>at-spi2-core</i>	2.32.1 <i>at-spi2-core-locale-en-gb</i>	LGPLv2
atk <i>atk</i>	2.32.0 <i>atk-locale-en-gb</i>	GPLv2+, LGPLv2+
attr <i>libattr</i>	2.4.47	LGPLv2.1+
avahi <i>avahi-daemon</i> <i>libavahi-client</i> <i>libavahi-core</i>	0.7 <i>avahi-locale-en-gb</i> <i>libavahi-common</i>	GPLv2+, LGPLv2.1+
base-files <i>base-files</i>	3.0.14	GPLv2
base-passwd <i>base-passwd</i>	3.5.29	GPLv2+
bash <i>bash</i>	5.0	GPLv3+
bc <i>bc</i>	1.07.1	GPLv3+
bluez5 <i>bluez5</i> <i>bluez5-obex</i>	5.50 <i>bluez5-noinst-tools</i>	GPLv2+, LGPLv2.1+
bonnie++ <i>bonnie++</i>	1.03e <i>bonnie++-scripts</i>	GPLv2
boost <i>boost-filesystem</i> <i>boost-regex</i>	1.71.0 <i>boost-iostreams</i>	BSL-1.0, MIT, Python-2.0
bootlog <i>bootlog</i>	1.0	MIT
busybox <i>busybox</i> <i>busybox-syslog</i>	1.31.0 <i>busybox-hwclock</i> <i>busybox-udhcp</i>	GPLv2, bzip2

Table N.2. – License overview listing (continued)

Recipe	Version	Licenses
bzip2 <i>libbz2</i>	1.0.8	bzip2
ca-certificates <i>ca-certificates</i>	20190110	GPL-2.0+, MPL-2.0
cairo <i>cairo</i>	1.16.0 <i>cairo-gobject</i>	MPL-1.1, LGPLv2.1
cifs-utils <i>cifs-utils</i>	6.4	GPLv3, LGPLv3
cmdline-keyboard <i>cmdline-keyboard</i>	1.0	MIT
cmdline-keyboard-xorg <i>cmdline-keyboard-xorg</i>	1.0	MIT
cmst <i>cmst</i>	2016.10.03	MIT
compton <i>compton</i>	v0.1-beta2	NTP, MIT
compton-conf <i>compton-conf</i>	0.14.1 <i>compton-conf-locale-en-gb</i>	LGPLv2.1
connman <i>connman</i>	1.37 <i>connman-client</i>	GPLv2
connman-info <i>connman-info</i>	1.0	GPLv2
consolekit <i>consolekit</i>	0.4.6	GPLv2+
coreutils <i>coreutils</i>	8.31	GPLv3+
cpufrequtils <i>cpufrequtils</i>	008	GPLv2
cpupower <i>cpupower</i>	1.0	GPLv2
cryptsetup <i>cryptsetup</i>	2.2.1	GPL-2.0-with-OpenSSL-exception
cups <i>cups-lib</i>	2.2.12	GPLv2, LGPLv2
curl <i>libcurl</i>	7.66.0	MIT
db <i>db</i>	5.3.28	Sleepycat
dbus <i>dbus</i>	1.12.16 <i>dbus-lib</i>	AFL-2.1, GPLv2+
dbus-glib <i>dbus-glib</i>	0.110	AFL-2.1, GPLv2+
dialog <i>dialog</i>	1.3-20190728	LGPL-2.1
dnf <i>dnf</i>	4.2.2 <i>dnf-locale-en-gb</i>	GPLv2
dosfstools <i>dosfstools</i>	4.1	GPLv3
dropbear <i>dropbear</i>	2019.78	MIT, BSD-3-Clause, BSD-2-Clause, PD
e2fsprogs <i>e2fsprogs</i> <i>e2fsprogs-e2fsck</i>	1.45.3 <i>e2fsprogs-badblocks</i> <i>e2fsprogs-mke2fs</i>	GPLv2, LGPLv2, BSD, MIT

Table N.2. – License overview listing (continued)

Recipe	Version	Licenses
<i>e2fsprogs-tune2fs</i>	<i>libcomerr</i>	
<i>libe2p</i>	<i>libext2fs</i>	
<i>libss</i>		
efi-var <i>efi-var</i>	git	GPLv2
eject <i>eject</i>	2.1.5	GPLv2
elfutils <i>libdw</i>	0.177 <i>libelf</i>	GPLv2, LGPLv3+
ell <i>ell</i>	0.22	LGPLv2.1
ethtool <i>ethtool</i>	5.2	GPLv2+
eudev <i>eudev</i> <i>libudev</i>	3.2.8 <i>eudev-hwdb</i>	GPLv2.0+, LGPL-2.1+
expat <i>expat</i>	2.2.8	MIT
file <i>file</i>	5.37	BSD
flac <i>libflac</i>	1.3.3	GFDL-1.2, GPLv2+, LGPLv2.1+, BSD
fontconfig <i>fontconfig</i>	2.13.1 <i>fontconfig-utils</i>	MIT-style, MIT, PD
formfactor <i>formfactor</i>	0.0	MIT
freetype <i>freetype</i>	2.10.1	FreeType, GPLv2+
fribidi <i>fribidi</i>	1.0.5	LGPLv2.1+
gcc-runtime <i>libatomic</i> <i>libstdc++</i>	9.2.0 <i>libgomp</i>	GPL-3.0-with-GCC-exception
gdbm <i>gdbm</i>	1.18.1 <i>gdbm-compat</i>	GPLv3
gdk-pixbuf <i>gdk-pixbuf</i> <i>gdk-pixbuf-loader-jpeg</i> <i>gdk-pixbuf-loader-xpm</i>	2.38.2 <i>gdk-pixbuf-loader-gif</i> <i>gdk-pixbuf-loader-png</i> <i>gdk-pixbuf-locale-en-gb</i>	LGPLv2.1
glib-2.0 <i>glib-2.0</i> <i>glib-2.0-utils</i>	2.60.7 <i>glib-2.0-locale-en-gb</i>	LGPLv2.1+, BSD, PD
glib-networking <i>glib-networking</i>	2.60.3 <i>glib-networking-locale-en-gb</i>	LGPLv2.1
glibc <i>glibc</i>	2.30	GPLv2, LGPLv2.1
glibc-locale <i>glibc-gconv</i> <i>glibc-locale-en-gb</i> <i>locale-base-en-gb</i>	2.30 <i>glibc-gconv-iso8859-1</i> <i>locale-base-de-de</i> <i>locale-base-en-us</i>	GPLv2, LGPLv2.1
glmark2 <i>glmark2</i>	20190205	GPLv3+, SGIV1
gmmllib <i>gmmllib</i>	19.2.3	MIT
gmp <i>gmp</i>	6.1.2	GPLv2+, LGPLv3+
gnupg	2.2.17	GPLv3, LGPLv3

Table N.2. – License overview listing (continued)

Recipe	Version	Licenses
<i>gnupg</i>		
gnutls <i>gnutls</i>	3.6.8	LGPLv2.1+
gobject-introspection <i>gobject-introspection</i>	1.60.2	LGPLv2+, GPLv2+
gottet <i>gottet</i>	1.1.8 <i>gottet-locale-en</i>	GPLv3
gpgme <i>gpgme</i>	1.13.1 <i>python3-gpg</i>	GPLv2+, LGPLv2.1+
grep <i>grep</i>	3.3	GPLv3
grub <i>grub-common</i>	2.04 <i>grub-editenv</i>	GPLv3
grub-bootconf <i>grub-bootconf</i>	1.00	MIT
grub-efi <i>grub-efi</i>	2.04	GPLv3
gst-examples <i>gst-examples</i>	1.16.0	LGPL-2.0+
gststreamer1.0 <i>gststreamer1.0</i>	1.16.1 <i>gststreamer1.0-locale-en-gb</i>	LGPLv2+
gststreamer1.0-libav	1.16.1	((GPLv2+ & LGPLv2.1+) (GPLv3+ & LGPLv3+)), GPLv2+, LGPLv2+
<i>gststreamer1.0-libav</i>		
gststreamer1.0-plugins-bad	1.16.1	GPLv2+, LGPLv2+, LGPLv2.1+
<i>gststreamer1.0-plugins-bad-accurip</i>	<i>gststreamer1.0-plugins-bad-adpcmdec</i>	
<i>gststreamer1.0-plugins-bad-adpcmenc</i>	<i>gststreamer1.0-plugins-bad-aiff</i>	
<i>gststreamer1.0-plugins-bad-asfmux</i>	<i>gststreamer1.0-plugins-bad-audiobuffersplit</i>	
<i>gststreamer1.0-plugins-bad-audiofxbad</i>	<i>gststreamer1.0-plugins-bad-audiolatency</i>	
<i>gststreamer1.0-plugins-bad-audiomixmatrix</i>	<i>gststreamer1.0-plugins-bad-audiovisualizers</i>	
<i>gststreamer1.0-plugins-bad-autoconvert</i>	<i>gststreamer1.0-plugins-bad-bayer</i>	
<i>gststreamer1.0-plugins-bad-bluez</i>	<i>gststreamer1.0-plugins-bad-bz2</i>	
<i>gststreamer1.0-plugins-bad-camerabin</i>	<i>gststreamer1.0-plugins-bad-closedcaption</i>	
<i>gststreamer1.0-plugins-bad-coloreffects</i>	<i>gststreamer1.0-plugins-bad-curl</i>	
<i>gststreamer1.0-plugins-bad-dashdemux</i>	<i>gststreamer1.0-plugins-bad-debugutilsbad</i>	
<i>gststreamer1.0-plugins-bad-decklink</i>	<i>gststreamer1.0-plugins-bad-dtls</i>	
<i>gststreamer1.0-plugins-bad-dvb</i>	<i>gststreamer1.0-plugins-bad-dvbsuboverlay</i>	
<i>gststreamer1.0-plugins-bad-dvdspe</i>	<i>gststreamer1.0-plugins-bad-faceoverlay</i>	
<i>gststreamer1.0-plugins-bad-fbdevsink</i>	<i>gststreamer1.0-plugins-bad-festival</i>	
<i>gststreamer1.0-plugins-bad-fieldanalysis</i>	<i>gststreamer1.0-plugins-bad-freeverb</i>	
<i>gststreamer1.0-plugins-bad-frei0r</i>	<i>gststreamer1.0-plugins-bad-gaudieffects</i>	
<i>gststreamer1.0-plugins-bad-gdp</i>	<i>gststreamer1.0-plugins-bad-geometrictransform</i>	
<i>gststreamer1.0-plugins-bad-hls</i>	<i>gststreamer1.0-plugins-bad-id3tag</i>	
<i>gststreamer1.0-plugins-bad-inter</i>	<i>gststreamer1.0-plugins-bad-interlace</i>	
<i>gststreamer1.0-plugins-bad-ipcpipeline</i>	<i>gststreamer1.0-plugins-bad-ivfparse</i>	
<i>gststreamer1.0-plugins-bad-ivtc</i>	<i>gststreamer1.0-plugins-bad-jp2kdecimator</i>	
<i>gststreamer1.0-plugins-bad-jpegformat</i>	<i>gststreamer1.0-plugins-bad-legacyrawparse</i>	
<i>gststreamer1.0-plugins-bad-locale-en-gb</i>	<i>gststreamer1.0-plugins-bad-meta</i>	
<i>gststreamer1.0-plugins-bad-midi</i>	<i>gststreamer1.0-plugins-bad-mpegpsdemux</i>	
<i>gststreamer1.0-plugins-bad-mpegpsmux</i>	<i>gststreamer1.0-plugins-bad-mpegtsdemux</i>	
<i>gststreamer1.0-plugins-bad-mpegtsmux</i>	<i>gststreamer1.0-plugins-bad-mxf</i>	
<i>gststreamer1.0-plugins-bad-netsim</i>	<i>gststreamer1.0-plugins-bad-pcapparse</i>	
<i>gststreamer1.0-plugins-bad-pnm</i>	<i>gststreamer1.0-plugins-bad-proxy</i>	
<i>gststreamer1.0-plugins-bad-removesilence</i>	<i>gststreamer1.0-plugins-bad-rfbsrc</i>	
<i>gststreamer1.0-plugins-bad-rsvg</i>	<i>gststreamer1.0-plugins-bad-rtponvif</i>	
<i>gststreamer1.0-plugins-bad-sbc</i>	<i>gststreamer1.0-plugins-bad-sdpelem</i>	
<i>gststreamer1.0-plugins-bad-segmentclip</i>	<i>gststreamer1.0-plugins-bad-shm</i>	
<i>gststreamer1.0-plugins-bad-siren</i>	<i>gststreamer1.0-plugins-bad-smooth</i>	
<i>gststreamer1.0-plugins-bad-smoothstreaming</i>	<i>gststreamer1.0-plugins-bad-sndfile</i>	
<i>gststreamer1.0-plugins-bad-speed</i>	<i>gststreamer1.0-plugins-bad-subenc</i>	
<i>gststreamer1.0-plugins-bad-timecode</i>	<i>gststreamer1.0-plugins-bad-ttmlsubs</i>	
<i>gststreamer1.0-plugins-bad-uvch264</i>	<i>gststreamer1.0-plugins-bad-videofiltersbad</i>	

Table N.2. – License overview listing (continued)

Recipe	Version	Licenses
<i>gststreamer1.0-plugins-bad-videoframe-audiolevel</i> <i>gststreamer1.0-plugins-bad-videosignal</i> <i>gststreamer1.0-plugins-bad-vulkan</i> <i>gststreamer1.0-plugins-bad-webp</i> <i>gststreamer1.0-plugins-bad-yadif</i> <i>libgstbadaudio-1.0</i> <i>libgstcodecparsers-1.0</i> <i>libgstisoff-1.0</i> <i>libgstphotography-1.0</i> <i>libgstscdp-1.0</i> <i>libgstwayland-1.0</i>	<i>gststreamer1.0-plugins-bad-videoparsersbad</i> <i>gststreamer1.0-plugins-bad-vmnc</i> <i>gststreamer1.0-plugins-bad-waylandsink</i> <i>gststreamer1.0-plugins-bad-y4mdec</i> <i>libgstadaptivedemux-1.0</i> <i>libgstbasecamerabinsrc-1.0</i> <i>libgstinsertbin-1.0</i> <i>libgstmpegts-1.0</i> <i>libgstplayer-1.0</i> <i>libgsturidownloader-1.0</i> <i>libgstwebRTC-1.0</i>	
gststreamer1.0-plugins-base	1.16.1	GPLv2+, LGPLv2+
<i>gststreamer1.0-plugins-base-adder</i> <i>gststreamer1.0-plugins-base-app</i> <i>gststreamer1.0-plugins-base-audioconvert</i> <i>gststreamer1.0-plugins-base-audiorate</i> <i>gststreamer1.0-plugins-base-audiotestsrc</i> <i>gststreamer1.0-plugins-base-encoding</i> <i>gststreamer1.0-plugins-base-locale-en-gb</i> <i>gststreamer1.0-plugins-base-ogg</i> <i>gststreamer1.0-plugins-base-overlaycomposition</i> <i>gststreamer1.0-plugins-base-pbtypes</i> <i>gststreamer1.0-plugins-base-rawparse</i> <i>gststreamer1.0-plugins-base-tcp</i> <i>gststreamer1.0-plugins-base-typefindfunctions</i> <i>gststreamer1.0-plugins-base-videorate</i> <i>gststreamer1.0-plugins-base-videotestsrc</i> <i>gststreamer1.0-plugins-base-vorbis</i> <i>gststreamer1.0-plugins-base-ximagesink</i> <i>libgstapp-1.0</i> <i>libgstfft-1.0</i> <i>libgstpbutils-1.0</i> <i>libgsttrtp-1.0</i> <i>libgstsdtp-1.0</i> <i>libgstvideo-1.0</i>	<i>gststreamer1.0-plugins-base-alsa</i> <i>gststreamer1.0-plugins-base-apps</i> <i>gststreamer1.0-plugins-base-audiomixer</i> <i>gststreamer1.0-plugins-base-audioresample</i> <i>gststreamer1.0-plugins-base-compositor</i> <i>gststreamer1.0-plugins-base-gio</i> <i>gststreamer1.0-plugins-base-meta</i> <i>gststreamer1.0-plugins-base-opengl</i> <i>gststreamer1.0-plugins-base-pango</i> <i>gststreamer1.0-plugins-base-playback</i> <i>gststreamer1.0-plugins-base-subparse</i> <i>gststreamer1.0-plugins-base-theora</i> <i>gststreamer1.0-plugins-base-videoconvert</i> <i>gststreamer1.0-plugins-base-videoscale</i> <i>gststreamer1.0-plugins-base-volume</i> <i>gststreamer1.0-plugins-base-ximagesink</i> <i>libgstallocators-1.0</i> <i>libgstaudio-1.0</i> <i>libgstgl-1.0</i> <i>libgsttriff-1.0</i> <i>libgsttrtp-1.0</i> <i>libgsttag-1.0</i>	
gststreamer1.0-plugins-good	1.16.1	GPLv2+, LGPLv2.1+
<i>gststreamer1.0-plugins-good</i> <i>gststreamer1.0-plugins-good-alpha</i> <i>gststreamer1.0-plugins-good-apttag</i> <i>gststreamer1.0-plugins-good-audioparsers</i> <i>gststreamer1.0-plugins-good-autodetect</i> <i>gststreamer1.0-plugins-good-cairo</i> <i>gststreamer1.0-plugins-good-debug</i> <i>gststreamer1.0-plugins-good-dtmf</i> <i>gststreamer1.0-plugins-good-equalizer</i> <i>gststreamer1.0-plugins-good-flv</i> <i>gststreamer1.0-plugins-good-gdkpixbuf</i> <i>gststreamer1.0-plugins-good-goom2k1</i> <i>gststreamer1.0-plugins-good-id3demux</i> <i>gststreamer1.0-plugins-good-interleave</i> <i>gststreamer1.0-plugins-good-jpeg</i> <i>gststreamer1.0-plugins-good-level</i> <i>gststreamer1.0-plugins-good-matroska</i> <i>gststreamer1.0-plugins-good-mpg123</i> <i>gststreamer1.0-plugins-good-multifile</i> <i>gststreamer1.0-plugins-good-navigationtest</i> <i>gststreamer1.0-plugins-good-png</i> <i>gststreamer1.0-plugins-good-replaygain</i> <i>gststreamer1.0-plugins-good-rtpmanager</i> <i>gststreamer1.0-plugins-good-shapewipe</i> <i>gststreamer1.0-plugins-good-soup</i> <i>gststreamer1.0-plugins-good-speex</i> <i>gststreamer1.0-plugins-good-udp</i> <i>gststreamer1.0-plugins-good-videobox</i> <i>gststreamer1.0-plugins-good-videofilter</i> <i>gststreamer1.0-plugins-good-vpx</i> <i>gststreamer1.0-plugins-good-wavparse</i> <i>gststreamer1.0-plugins-good-y4menc</i>	<i>gststreamer1.0-plugins-good-alaw</i> <i>gststreamer1.0-plugins-good-alpha-color</i> <i>gststreamer1.0-plugins-good-audiofx</i> <i>gststreamer1.0-plugins-good-auparse</i> <i>gststreamer1.0-plugins-good-avi</i> <i>gststreamer1.0-plugins-good-cutter</i> <i>gststreamer1.0-plugins-good-deinterlace</i> <i>gststreamer1.0-plugins-good-effectv</i> <i>gststreamer1.0-plugins-good-flac</i> <i>gststreamer1.0-plugins-good-flxdec</i> <i>gststreamer1.0-plugins-good-goom</i> <i>gststreamer1.0-plugins-good-icydemux</i> <i>gststreamer1.0-plugins-good-imagefreeze</i> <i>gststreamer1.0-plugins-good-isomp4</i> <i>gststreamer1.0-plugins-good-lame</i> <i>gststreamer1.0-plugins-good-locale-en-gb</i> <i>gststreamer1.0-plugins-good-meta</i> <i>gststreamer1.0-plugins-good-mulaw</i> <i>gststreamer1.0-plugins-good-multipart</i> <i>gststreamer1.0-plugins-good-ossaudio</i> <i>gststreamer1.0-plugins-good-pulseaudio</i> <i>gststreamer1.0-plugins-good-rtp</i> <i>gststreamer1.0-plugins-good-rtsp</i> <i>gststreamer1.0-plugins-good-smpte</i> <i>gststreamer1.0-plugins-good-spectrum</i> <i>gststreamer1.0-plugins-good-taglib</i> <i>gststreamer1.0-plugins-good-video4linux2</i> <i>gststreamer1.0-plugins-good-videocrop</i> <i>gststreamer1.0-plugins-good-videomixer</i> <i>gststreamer1.0-plugins-good-wavenc</i> <i>gststreamer1.0-plugins-good-ximagesrc</i>	
gststreamer1.0-plugins-ugly	1.16.1	GPLv2+, LGPLv2.1+, LGPLv2+

Table N.2. – License overview listing (continued)

Recipe	Version	Licenses
<i>gststreamer1.0-plugins-ugly-a52dec</i> <i>gststreamer1.0-plugins-ugly-dvdlpcmdec</i> <i>gststreamer1.0-plugins-ugly-locale-en-gb</i> <i>gststreamer1.0-plugins-ugly-mpeg2dec</i> <i>gststreamer1.0-plugins-ugly-xingmux</i>	<i>gststreamer1.0-plugins-ugly-asf</i> <i>gststreamer1.0-plugins-ugly-dvdsb</i> <i>gststreamer1.0-plugins-ugly-meta</i> <i>gststreamer1.0-plugins-ugly-realmedia</i>	
gststreamer1.0-vaapi <i>gststreamer1.0-vaapi</i>	1.16.1	LGPLv2.1+
gtk+3 <i>gtk+3</i> <i>gtk+3-locale-en-gb</i>	3.24.8 <i>gtk+3-locale-en</i>	LGPLv2, LGPLv2+, LGPLv2.1+
gvfs <i>gvfs</i> <i>gvfsd-trash</i>	1.41.2 <i>gvfs-locale-en-gb</i>	LGPLv2
harfbuzz <i>harfbuzz</i>	2.6.1	MIT
hdparm <i>hdparm</i>	9.58	BSD
hicolor-icon-theme <i>hicolor-icon-theme</i>	0.17	GPLv2
hostapd <i>hostapd</i>	2.9	BSD-3-Clause
hsetroot <i>hsetroot</i>	1.0.2	GPLv2
htpdate <i>htpdate</i>	1.1.3	GPLv2
hunspell <i>hunspell</i>	1.7.0	GPLv2, LGPLv2.1
i2c-ids <i>i2c-ids</i>	1.0	MIT
i2c-tools <i>i2c-tools</i>	4.1	GPLv2+
i2c-write-read <i>i2c-write-read</i>	git	GPLv2
icu <i>libicudata</i> <i>libicuuc</i>	64.2 <i>libicui18n</i>	ICU
igt-gpu-tools <i>igt-gpu-tools</i>	1.24	MIT-X, ISC
imlib2 <i>imlib2</i>	1.4.6 <i>imlib2-loaders</i>	MIT, BSD
init-ifupdown <i>init-ifupdown</i>	1.0	GPLv2
initscripts <i>initscripts</i>	1.0 <i>initscripts-functions</i>	GPLv2
intel-media-driver <i>intel-media-driver</i>	19.2.1	MIT, BSD-3-Clause
intel-mediasdk <i>intel-mediasdk</i>	19.2.1	MIT
intel-microcode <i>intel-microcode</i>	20190918	Intel-Microcode-License
intel-vaapi-driver <i>intel-vaapi-driver</i>	2.3.0	MIT
iperf3 <i>iperf3</i>	3.7	BSD
iptables <i>iptables</i> <i>iptables-module-ip6t-dnat</i> <i>iptables-module-ip6t-dst</i>	1.8.3 <i>iptables-module-ip6t-ah</i> <i>iptables-module-ip6t-dnpt</i> <i>iptables-module-ip6t-eui64</i>	GPLv2+

Table N.2. – License overview listing (continued)

Recipe	Version	Licenses
<i>iptables-module-ip6t-frag</i>	<i>iptables-module-ip6t-hbh</i>	
<i>iptables-module-ip6t-hl</i>	<i>iptables-module-ip6t-icmp6</i>	
<i>iptables-module-ip6t-ipv6header</i>	<i>iptables-module-ip6t-log</i>	
<i>iptables-module-ip6t-masquerade</i>	<i>iptables-module-ip6t-mh</i>	
<i>iptables-module-ip6t-netmap</i>	<i>iptables-module-ip6t-redirect</i>	
<i>iptables-module-ip6t-reject</i>	<i>iptables-module-ip6t-rt</i>	
<i>iptables-module-ip6t-snat</i>	<i>iptables-module-ip6t-snpt</i>	
<i>iptables-module-ip6t-srh</i>	<i>iptables-module-ipt-ah</i>	
<i>iptables-module-ipt-clusterip</i>	<i>iptables-module-ipt-dnat</i>	
<i>iptables-module-ipt-ecn</i>	<i>iptables-module-ipt-icmp</i>	
<i>iptables-module-ipt-log</i>	<i>iptables-module-ipt-masquerade</i>	
<i>iptables-module-ipt-netmap</i>	<i>iptables-module-ipt-realm</i>	
<i>iptables-module-ipt-redirect</i>	<i>iptables-module-ipt-reject</i>	
<i>iptables-module-ipt-snat</i>	<i>iptables-module-ipt-ttl</i>	
<i>iptables-module-ipt-ulog</i>	<i>iptables-module-xt-addrtype</i>	
<i>iptables-module-xt-audit</i>	<i>iptables-module-xt-bpf</i>	
<i>iptables-module-xt-cgroup</i>	<i>iptables-module-xt-checksum</i>	
<i>iptables-module-xt-classify</i>	<i>iptables-module-xt-cluster</i>	
<i>iptables-module-xt-comment</i>	<i>iptables-module-xt-connbytes</i>	
<i>iptables-module-xt-connlimit</i>	<i>iptables-module-xt-connmark</i>	
<i>iptables-module-xt-connsecmark</i>	<i>iptables-module-xt-conntrack</i>	
<i>iptables-module-xt-cpu</i>	<i>iptables-module-xt-ct</i>	
<i>iptables-module-xt-dccp</i>	<i>iptables-module-xt-devgroup</i>	
<i>iptables-module-xt-dscp</i>	<i>iptables-module-xt-ecn</i>	
<i>iptables-module-xt-esp</i>	<i>iptables-module-xt-hashlimit</i>	
<i>iptables-module-xt-helper</i>	<i>iptables-module-xt-hmark</i>	
<i>iptables-module-xt-idletimer</i>	<i>iptables-module-xt-ipcomp</i>	
<i>iptables-module-xt-iprange</i>	<i>iptables-module-xt-ipvs</i>	
<i>iptables-module-xt-led</i>	<i>iptables-module-xt-length</i>	
<i>iptables-module-xt-limit</i>	<i>iptables-module-xt-mac</i>	
<i>iptables-module-xt-mark</i>	<i>iptables-module-xt-multiport</i>	
<i>iptables-module-xt-nfacct</i>	<i>iptables-module-xt-nflog</i>	
<i>iptables-module-xt-nfqueue</i>	<i>iptables-module-xt-osf</i>	
<i>iptables-module-xt-owner</i>	<i>iptables-module-xt-physdev</i>	
<i>iptables-module-xt-pkttype</i>	<i>iptables-module-xt-policy</i>	
<i>iptables-module-xt-quota</i>	<i>iptables-module-xt-rateest</i>	
<i>iptables-module-xt-recent</i>	<i>iptables-module-xt-rpfilter</i>	
<i>iptables-module-xt-sctp</i>	<i>iptables-module-xt-secmark</i>	
<i>iptables-module-xt-set</i>	<i>iptables-module-xt-socket</i>	
<i>iptables-module-xt-standard</i>	<i>iptables-module-xt-statistic</i>	
<i>iptables-module-xt-string</i>	<i>iptables-module-xt-synproxy</i>	
<i>iptables-module-xt-tcp</i>	<i>iptables-module-xt-tcpmss</i>	
<i>iptables-module-xt-tcpoptstrip</i>	<i>iptables-module-xt-tee</i>	
<i>iptables-module-xt-time</i>	<i>iptables-module-xt-tos</i>	
<i>iptables-module-xt-tproxy</i>	<i>iptables-module-xt-trace</i>	
<i>iptables-module-xt-u32</i>	<i>iptables-module-xt-udp</i>	
<i>iptables-modules</i>		
iw	5.3	BSD-2-Clause
<i>iw</i>		
json-c	0.13.1	MIT
<i>json-c</i>		
kbd	2.0.4	GPLv2+
<i>kbd</i>	<i>kbd-keymaps</i>	
kexec-tools	2.0.19	GPLv2
<i>kexec</i>		
keymaps	1.0	GPLv2
<i>keymaps</i>		
keyutils	1.5.10	GPLv2
<i>keyutils</i>		
kidletime	5.64.0	GPLv2, LGPLv2.1
<i>kidletime</i>		
kmod	26	GPL-2.0+, LGPL-2.1+
<i>kmod</i>	<i>libkmod</i>	
kwayland	5.64.0	LGPLv2.1
<i>kwayland</i>		
kwindowssystem	5.64.0	GPLv2, LGPLv2.1
<i>kwindowssystem</i>	<i>kwindowssystem-locale-en-gb</i>	

Table N.2. – License overview listing (continued)

Recipe	Version	Licenses
l3afpad <i>l3afpad</i>	0.8.18.1.11	GPLv2+
lame <i>libmp3lame</i>	3.100	LGPLv2+
lib64-compatibility <i>lib64-compatibility</i>	1.0	MIT
liba52 <i>liba52</i>	0.7.4	GPLv2+
libaio <i>libaio</i>	0.3.111	LGPLv2.1+
libarchive <i>libarchive</i>	3.4.0	BSD
libassuan <i>libassuan</i>	2.5.3	LGPLv2.1+
libatasmart <i>libatasmart</i>	0.19	LGPLv2.1
libblockdev <i>libblockdev</i>	2.23	LGPLv2+
libbytesize <i>libbytesize</i>	2.1	LGPLv2+
libcap <i>libcap</i>	2.27	BSD, GPLv2
libcomps <i>libcomps</i>	0.1.11	GPLv2
libconfig <i>libconfig</i>	1.7.2	LGPLv2.1
libcroco <i>libcroco</i>	0.6.13	LGPLv2, LGPLv2.1
libdaemon <i>libdaemon</i>	0.14	LGPLv2.1+
libdbusmenu-qt5 <i>libdbusmenu-qt5</i>	0.9.3	GPLv2
libdmx <i>libdmx</i>	1.1.4	MIT
libdnf <i>libdnf</i>	0.28.1	LGPLv2.1
libdrm <i>libdrm</i> <i>libdrm-nouveau</i>	2.4.99 <i>libdrm-intel</i> <i>libdrm-radeon</i>	MIT
libepoxy <i>libepoxy</i>	1.5.3	MIT
liberation-fonts <i>liberation-fonts</i>	2.00.1	OFL-1.1
libevdev <i>libevdev</i>	1.8.0	MIT-X
libexif <i>libexif</i>	0.6.21 <i>libexif-locale-en-gb</i>	LGPLv2.1
libffi <i>libffi</i>	3.3 rc0	MIT
libfm-extra <i>libfm-extra</i>	1.3.1	LGPLv2+
libfm-qt <i>libfm-qt</i>	0.14.1 <i>libfm-qt-locale-en-gb</i>	LGPLv2.1
libfontenc <i>libfontenc</i>	1.1.4	MIT
libgcc <i>libgcc</i>	9.2.0	GPL-3.0-with-GCC-exception
libgcrypt	1.8.4	LGPLv2.1+

Table N.2. – License overview listing (continued)

Recipe	Version	Licenses
<i>libgcrpt</i>		
libgpg-error <i>libgpg-error</i>	1.36	GPLv2+, LGPLv2.1+
libgphoto2 <i>libgphoto2</i> <i>libgphoto2port</i>	2.5.17 <i>libgphoto2-camlibs</i>	LGPLv2.1
libgudev <i>libgudev</i>	233	LGPLv2.1
libical <i>libical</i>	3.0.6	LGPLv2.1, MPL-2.0
libice <i>libice</i>	1.0.10	MIT-style
libidn2 <i>libidn2</i>	2.2.0	(GPLv2+ LGPLv3)
libinput <i>libinput</i>	1.14.1	MIT
libjpeg-turbo <i>libjpeg-turbo</i>	2.0.3	BSD-3-Clause
libksba <i>libksba</i>	1.3.5	GPLv2+, LGPLv3+, GPLv3+
libkscreen <i>libkscreen</i>	5.17.4	GPLv2
liblxml <i>liblxml</i>	0.14.1 <i>liblxml-locale-en-gb</i>	LGPLv2.1
libmodulemd <i>libmodulemd</i>	2.6.0	MIT
libmscboost <i>libmscboost</i>	git	LGPLv2.1
libmscboostpython <i>libmscboostpython</i>	git	LGPLv2.1
libnl <i>libnl</i>	3.5.0 <i>libnl-genl</i>	LGPLv2.1
libnotify <i>libnotify</i>	0.7.8	LGPLv2.1
libnsl2 <i>libnsl2</i>	1.2.0	LGPL-2.1
libnss-mdns <i>libnss-mdns</i>	0.10	LGPLv2.1+
libogg <i>libogg</i>	1.3.4	BSD
libpcap <i>libpcap</i>	1.9.1	BSD
libpciaccess <i>libpciaccess</i>	0.16	MIT, MIT-style
libpcre <i>libpcre</i>	8.43	BSD
libpcre2 <i>libpcre2</i>	10.33	BSD
libpng <i>libpng</i>	1.6.37	Libpng
libpsl <i>libpsl</i>	0.21.0	MIT
libqtdg <i>libqtdg</i>	3.3.1	LGPLv2.1
librepo <i>librepo</i>	1.10.5	LGPLv2.1

Table N.2. – License overview listing (continued)

Recipe	Version	Licenses
librsvg <i>librsvg</i>	2.40.20	LGPLv2+
libsamplerate0 <i>libsamplerate0</i>	0.1.9	BSD-2-Clause
libsdl <i>libsdl</i>	1.2.15	LGPLv2.1
libsecret <i>libsecret</i>	0.19.0	LGPLv2.1
	<i>libsecret-locale-en-gb</i>	
libsm <i>libsm</i>	1.2.3	MIT-style
libsndfile1 <i>libsndfile1</i>	1.0.28	LGPLv2.1
libsolv <i>libsolv</i>	0.7.6	BSD-3-Clause
	<i>libsolvext</i>	
libsoup-2.4 <i>libsoup-2.4</i>	2.66.2	LGPLv2
	<i>libsoup-2.4-locale-en-gb</i>	
libstatgrab <i>libstatgrab</i>	0.91	MIT
libsysstat <i>libsysstat</i>	0.4.2	LGPLv2.1
libtheora <i>libtheora</i>	1.1.1	BSD
libtirpc <i>libtirpc</i>	1.1.4	BSD
libtool <i>libltdl</i>	2.4.6	GPLv2, LGPLv2.1
libunistring <i>libunistring</i>	0.9.10	LGPLv3+, GPLv2
libunwind <i>libunwind</i>	1.3.1	MIT
libusb1 <i>libusb1</i>	1.0.22	LGPLv2.1+
libva <i>libva</i>	2.5.0	MIT
	<i>libva-wayland</i>	
	<i>libva-x11</i>	
libva-utils <i>libva-utils</i>	2.5.0	MIT
libvorbis <i>libvorbis</i>	1.3.6	BSD
libvpx <i>libvpx</i>	1.8.1	BSD
libwebp <i>libwebp</i>	1.0.3	BSD
libx11 <i>libx11</i>	1.6.8	MIT, MIT-style, BSD
	<i>libx11-locale</i>	
	<i>libx11-xcb</i>	
libxau <i>libxau</i>	1.0.9	MIT-style
libxaw <i>libxaw7</i>	1.0.13	MIT-X
libxcb <i>libxcb</i>	1.13.1	MIT
	<i>libxcb-dri2</i>	
	<i>libxcb-dri3</i>	
	<i>libxcb-glx</i>	
	<i>libxcb-present</i>	
	<i>libxcb-randr</i>	
	<i>libxcb-render</i>	
	<i>libxcb-res</i>	
	<i>libxcb-shape</i>	
	<i>libxcb-shm</i>	
	<i>libxcb-sync</i>	
	<i>libxcb-xfixes</i>	
	<i>libxcb-xinerama</i>	
	<i>libxcb-xinput</i>	
	<i>libxcb-xkb</i>	

Table N.2. – License overview listing (continued)

Recipe	Version	Licenses
libxcomposite <i>libxcomposite</i>	0.4.5	MIT-style
libxcrypt <i>libxcrypt</i>	4.4.8	LGPLv2.1
libxcursor <i>libxcursor</i>	1.2.0	MIT-style
libxdamage <i>libxdamage</i>	1.1.5	MIT
libxdmcp <i>libxdmcp</i>	1.1.3	MIT-style
libxext <i>libxext</i>	1.3.4	MIT-style
libxfce4ui <i>libxfce4ui</i> <i>libxfce4ui-locale-en-gb</i>	4.14.1 <i>libxfce4ui-gtk3</i>	GPLv2
libxfce4util <i>libxfce4util</i>	4.14.0 <i>libxfce4util-locale-en-gb</i>	GPLv2
libxfixes <i>libxfixes</i>	5.0.3	MIT-style
libxfont2 <i>libxfont2</i>	2.0.3	MIT, MIT-style, BSD
libxft <i>libxft</i>	2.3.3	MIT
libxi <i>libxi</i>	1.7.10	MIT, MIT-style
libxinerama <i>libxinerama</i>	1.1.4	MIT
libxkbcommon <i>libxkbcommon</i>	0.8.4	MIT, MIT-style
libxkbfile <i>libxkbfile</i>	1.1.0	MIT-style
libxml2 <i>libxml2</i>	2.9.9 <i>libxml2-utils</i>	MIT
libxmu <i>libxmu</i>	1.1.3 <i>libxmuu</i>	MIT, MIT-style
libxpm <i>libxpm</i>	3.5.12	BSD
libxrandr <i>libxrandr</i>	1.5.2	MIT-style
libxrender <i>libxrender</i>	0.9.10	MIT-style
libxscrsaver <i>libxscrsaver</i>	1.2.3	MIT
libxshmfence <i>libxshmfence</i>	1.3	MIT-style
libxslt <i>libxslt</i>	1.1.33	MIT
libxt <i>libxt</i>	1.2.0	MIT, MIT-style
libxtst <i>libxtst</i>	1.2.3	MIT-style
libxv <i>libxv</i>	1.0.11	MIT-style
libxvmc <i>libxvmc</i>	1.0.11	MIT
libxxf86vm <i>libxxf86vm</i>	1.1.4	MIT
libyaml <i>libyaml</i>	0.2.2	MIT

Table N.2. – License overview listing (continued)

Recipe	Version	Licenses
linux-firmware	20190815	Firmware-Abilis, Firmware-agere, Firmware-amdgpu, Firmware-amd-ucode, Firmware-atmel, Firmware-ca0132, Firmware-cavium, Firmware-chelsio_firmware, Firmware-cw1200, Firmware-dib0700, Firmware-e100, Firmware-ene_firmware, Firmware-fw_sst_0f28, Firmware-go7007, Firmware-hfi1_firmware, Firmware-i2400m, Firmware-ibt_firmware, Firmware-it913x, Firmware-IntcSST2, Firmware-kaweth, Firmware-moxa, Firmware-myri10ge_firmware, Firmware-nvidia, Firmware-OLPC, Firmware-ath9k-htc, Firmware-phanfw, Firmware-qat, Firmware-qcom, Firmware-qla1280, Firmware-qla2xxx, Firmware-r8a779x_usb3, Firmware-radeon, Firmware-ralink_a_mEDIATEK_company_firmware, Firmware-ralink-firmware, Firmware-imx-sdma_firmware, Firmware-siano, Firmware-tda7706-firmware, Firmware-ti-connectivity, Firmware-ti-keystone, Firmware-ueagle-atm4-firmware, Firmware-wl1251, Firmware-xc4000, Firmware-xc5000, Firmware-xc5000c, WHENCE
<i>linux-firmware</i>		<i>linux-firmware-adsp-sst</i>
<i>linux-firmware-adsp-sst-license</i>		<i>linux-firmware-ar3k</i>
<i>linux-firmware-ar3k-license</i>		<i>linux-firmware-ar9170</i>
<i>linux-firmware-ath10k</i>		<i>linux-firmware-ath10k-license</i>
<i>linux-firmware-ath6k</i>		<i>linux-firmware-ath9k</i>
<i>linux-firmware-atheros-license</i>		<i>linux-firmware-bcm-0bb4-0306</i>
<i>linux-firmware-bcm43143</i>		<i>linux-firmware-bcm43236b</i>
<i>linux-firmware-bcm43241b0</i>		<i>linux-firmware-bcm43241b4</i>
<i>linux-firmware-bcm43241b5</i>		<i>linux-firmware-bcm43242a</i>
<i>linux-firmware-bcm4329</i>		<i>linux-firmware-bcm4329-fullmac</i>
<i>linux-firmware-bcm4330</i>		<i>linux-firmware-bcm4334</i>
<i>linux-firmware-bcm43340</i>		<i>linux-firmware-bcm4335</i>
<i>linux-firmware-bcm43362</i>		<i>linux-firmware-bcm4339</i>
<i>linux-firmware-bcm43430</i>		<i>linux-firmware-bcm43430a0</i>
<i>linux-firmware-bcm43455</i>		<i>linux-firmware-bcm4350</i>
<i>linux-firmware-bcm4350c2</i>		<i>linux-firmware-bcm4354</i>
<i>linux-firmware-bcm4356</i>		<i>linux-firmware-bcm4356-pcie</i>
<i>linux-firmware-bcm43569</i>		<i>linux-firmware-bcm43570</i>
<i>linux-firmware-bcm4358</i>		<i>linux-firmware-bcm43602</i>
<i>linux-firmware-bcm4366b</i>		<i>linux-firmware-bcm4366c</i>
<i>linux-firmware-bcm4371</i>		<i>linux-firmware-bcm4373</i>
<i>linux-firmware-bcm43xx</i>		<i>linux-firmware-bcm43xx-hdr</i>
<i>linux-firmware-bnx2-mips</i>		<i>linux-firmware-broadcom-license</i>

Table N.2. – License overview listing (continued)

Recipe	Version	Licenses
<i>linux-firmware-carl9170</i>	<i>linux-firmware-cypress-license</i>	
<i>linux-firmware-gplv2-license</i>	<i>linux-firmware-i915</i>	
<i>linux-firmware-i915-license</i>	<i>linux-firmware-ibt</i>	
<i>linux-firmware-ibt-11-5</i>	<i>linux-firmware-ibt-12-16</i>	
<i>linux-firmware-ibt-17</i>	<i>linux-firmware-ibt-17-16</i>	
<i>linux-firmware-ibt-hw-37-7</i>	<i>linux-firmware-ibt-hw-37-8</i>	
<i>linux-firmware-ibt-license</i>	<i>linux-firmware-ibt-misc</i>	
<i>linux-firmware-imx-sdma-imx6q</i>	<i>linux-firmware-imx-sdma-imx7d</i>	
<i>linux-firmware-imx-sdma-license</i>	<i>linux-firmware-iwlwifi</i>	
<i>linux-firmware-iwlwifi-135-6</i>	<i>linux-firmware-iwlwifi-3160-10</i>	
<i>linux-firmware-iwlwifi-3160-12</i>	<i>linux-firmware-iwlwifi-3160-13</i>	
<i>linux-firmware-iwlwifi-3160-16</i>	<i>linux-firmware-iwlwifi-3160-17</i>	
<i>linux-firmware-iwlwifi-3160-7</i>	<i>linux-firmware-iwlwifi-3160-8</i>	
<i>linux-firmware-iwlwifi-3160-9</i>	<i>linux-firmware-iwlwifi-6000-4</i>	
<i>linux-firmware-iwlwifi-6000g2a-5</i>	<i>linux-firmware-iwlwifi-6000g2a-6</i>	
<i>linux-firmware-iwlwifi-6000g2b-5</i>	<i>linux-firmware-iwlwifi-6000g2b-6</i>	
<i>linux-firmware-iwlwifi-6050-4</i>	<i>linux-firmware-iwlwifi-6050-5</i>	
<i>linux-firmware-iwlwifi-7260</i>	<i>linux-firmware-iwlwifi-7265</i>	
<i>linux-firmware-iwlwifi-7265d</i>	<i>linux-firmware-iwlwifi-8000c</i>	
<i>linux-firmware-iwlwifi-8265</i>	<i>linux-firmware-iwlwifi-9000</i>	
<i>linux-firmware-iwlwifi-9000-46</i>	<i>linux-firmware-iwlwifi-license</i>	
<i>linux-firmware-iwlwifi-misc</i>	<i>linux-firmware-license</i>	
<i>linux-firmware-liquidio</i>	<i>linux-firmware-marvell-license</i>	
<i>linux-firmware-mt7601u</i>	<i>linux-firmware-mt7601u-license</i>	
<i>linux-firmware-netronome</i>	<i>linux-firmware-netronome-license</i>	
<i>linux-firmware-pcie8897</i>	<i>linux-firmware-pcie8897</i>	
<i>linux-firmware-qat</i>	<i>linux-firmware-qat-license</i>	
<i>linux-firmware-qca</i>	<i>linux-firmware-qcom-adreno-a3xx</i>	
<i>linux-firmware-qcom-adreno-a530</i>	<i>linux-firmware-qcom-license</i>	
<i>linux-firmware-qcom-venus-1.8</i>	<i>linux-firmware-qcom-venus-4.2</i>	
<i>linux-firmware-radeon</i>	<i>linux-firmware-radeon-license</i>	
<i>linux-firmware-ralink</i>	<i>linux-firmware-ralink-license</i>	
<i>linux-firmware-rtl-license</i>	<i>linux-firmware-rtl8168</i>	
<i>linux-firmware-rtl8188</i>	<i>linux-firmware-rtl8192ce</i>	
<i>linux-firmware-rtl8192cu</i>	<i>linux-firmware-rtl8192su</i>	
<i>linux-firmware-rtl8723</i>	<i>linux-firmware-rtl8821</i>	
<i>linux-firmware-sd8686</i>	<i>linux-firmware-sd8688</i>	
<i>linux-firmware-sd8787</i>	<i>linux-firmware-sd8797</i>	
<i>linux-firmware-sd8801</i>	<i>linux-firmware-sd8887</i>	
<i>linux-firmware-sd8897</i>	<i>linux-firmware-ti-connectivity-license</i>	
<i>linux-firmware-usb8997</i>	<i>linux-firmware-vt6656</i>	
<i>linux-firmware-vt6656-license</i>	<i>linux-firmware-whence-license</i>	
<i>linux-firmware-wl12xx</i>	<i>linux-firmware-wl18xx</i>	
<i>linux-firmware-wlcommon</i>		
linux-tools-testusb	1.0	GPL-2.0
<i>linux-tools-testusb</i>		
linux-yocto	5.2.20	GPLv2
<i>kernel</i>	<i>kernel-base</i>	
<i>kernel-image</i>	<i>kernel-image-bzimage</i>	
<i>kernel-module-8021q-5.2.20-yocto-standard</i>	<i>kernel-module-8250-exar-5.2.20-yocto-standard</i>	
<i>kernel-module-ac97-bus-5.2.20-yocto-standard</i>	<i>kernel-module-acpi-thermal-rel-5.2.20-yocto-standard</i>	
<i>kernel-module-act-mirred-5.2.20-yocto-standard</i>	<i>kernel-module-af-key-5.2.20-yocto-standard</i>	
<i>kernel-module-anubis-5.2.20-yocto-standard</i>	<i>kernel-module-arc4-5.2.20-yocto-standard</i>	
<i>kernel-module-arp-tables-5.2.20-yocto-standard</i>	<i>kernel-module-arpt-mangle-5.2.20-yocto-standard</i>	
<i>kernel-module-arptable-filter-5.2.20-yocto-standard</i>	<i>kernel-module-asix-5.2.20-yocto-standard</i>	
<i>kernel-module-at24-5.2.20-yocto-standard</i>	<i>kernel-module-at25-5.2.20-yocto-standard</i>	
<i>kernel-module-ath-5.2.20-yocto-standard</i>	<i>kernel-module-ath5k-5.2.20-yocto-standard</i>	
<i>kernel-module-ath9k-5.2.20-yocto-standard</i>	<i>kernel-module-ath9k-common-5.2.20-yocto-standard</i>	
<i>kernel-module-ath9k-hw-5.2.20-yocto-standard</i>	<i>kernel-module-atkbd-5.2.20-yocto-standard</i>	
<i>kernel-module-ax88179-178a-5.2.20-yocto-standard</i>	<i>kernel-module-baytrail-edac-5.2.20-yocto-standard</i>	
<i>kernel-module-bcma-5.2.20-yocto-standard</i>	<i>kernel-module-binfmt-misc-5.2.20-yocto-standard</i>	
<i>kernel-module-blowfish-common-5.2.20-yocto-standard</i>	<i>kernel-module-blowfish-generic-5.2.20-yocto-standard</i>	
<i>kernel-module-bnep-5.2.20-yocto-standard</i>	<i>kernel-module-bonding-5.2.20-yocto-standard</i>	
<i>kernel-module-bq25890-charger-5.2.20-yocto-standard</i>	<i>kernel-module-brcmfmac-5.2.20-yocto-standard</i>	
<i>kernel-module-brcmsmac-5.2.20-yocto-standard</i>	<i>kernel-module-brcmutil-5.2.20-yocto-standard</i>	
<i>kernel-module-bridge-5.2.20-yocto-standard</i>	<i>kernel-module-btbcm-5.2.20-yocto-standard</i>	
<i>kernel-module-btintel-5.2.20-yocto-standard</i>	<i>kernel-module-btmrvl-5.2.20-yocto-standard</i>	
<i>kernel-module-btmrvl-sdio-5.2.20-yocto-standard</i>	<i>kernel-module-btrtl-5.2.20-yocto-standard</i>	
<i>kernel-module-btusb-5.2.20-yocto-standard</i>	<i>kernel-module-camellia-generic-5.2.20-yocto-standard</i>	
<i>kernel-module-can-5.2.20-yocto-standard</i>	<i>kernel-module-can-bcm-5.2.20-yocto-standard</i>	
<i>kernel-module-can-dev-5.2.20-yocto-standard</i>	<i>kernel-module-can-gw-5.2.20-yocto-standard</i>	

Table N.2. – License overview listing (continued)

Recipe	Version	Licenses
<i>kernel-module-can-raw-5.2.20-yocto-standard</i>	<i>kernel-module-cast-common-5.2.20-yocto-standard</i>	
<i>kernel-module-cast5-generic-5.2.20-yocto-standard</i>	<i>kernel-module-cast6-generic-5.2.20-yocto-standard</i>	
<i>kernel-module-ccm-5.2.20-yocto-standard</i>	<i>kernel-module-cdc-acm-5.2.20-yocto-standard</i>	
<i>kernel-module-cdc-eem-5.2.20-yocto-standard</i>	<i>kernel-module-cdc-ether-5.2.20-yocto-standard</i>	
<i>kernel-module-cdc-ncm-5.2.20-yocto-standard</i>	<i>kernel-module-cdc-subset-5.2.20-yocto-standard</i>	
<i>kernel-module-cdc-wdm-5.2.20-yocto-standard</i>	<i>kernel-module-cfg80211-5.2.20-yocto-standard</i>	
<i>kernel-module-chipreg-5.2.20-yocto-standard</i>	<i>kernel-module-cifs-5.2.20-yocto-standard</i>	
<i>kernel-module-cirrus-5.2.20-yocto-standard</i>	<i>kernel-module-cmdlinepart-5.2.20-yocto-standard</i>	
<i>kernel-module-configfs-5.2.20-yocto-standard</i>	<i>kernel-module-cordic-5.2.20-yocto-standard</i>	
<i>kernel-module-coretemp-5.2.20-yocto-standard</i>	<i>kernel-module-crc-ccitt-5.2.20-yocto-standard</i>	
<i>kernel-module-crc-itu-t-5.2.20-yocto-standard</i>	<i>kernel-module-crc-t10dif-5.2.20-yocto-standard</i>	
<i>kernel-module-crct10dif-common-5.2.20-yocto-standard</i>	<i>kernel-module-crct10dif-generic-5.2.20-yocto-standard</i>	
<i>kernel-module-cryptoloop-5.2.20-yocto-standard</i>	<i>kernel-module-ctr-5.2.20-yocto-standard</i>	
<i>kernel-module-cuse-5.2.20-yocto-standard</i>	<i>kernel-module-deflate-5.2.20-yocto-standard</i>	
<i>kernel-module-diag-5.2.20-yocto-standard</i>	<i>kernel-module-dm9601-5.2.20-yocto-standard</i>	
<i>kernel-module-dme1737-5.2.20-yocto-standard</i>	<i>kernel-module-dummy-5.2.20-yocto-standard</i>	
<i>kernel-module-dummy-hcd-5.2.20-yocto-standard</i>	<i>kernel-module-dw-dmac-5.2.20-yocto-standard</i>	
<i>kernel-module-dwc2-5.2.20-yocto-standard</i>	<i>kernel-module-dwc2-pci-5.2.20-yocto-standard</i>	
<i>kernel-module-dwc3-5.2.20-yocto-standard</i>	<i>kernel-module-dwc3-haps-5.2.20-yocto-standard</i>	
<i>kernel-module-dwc3-pci-5.2.20-yocto-standard</i>	<i>kernel-module-e100-5.2.20-yocto-standard</i>	
<i>kernel-module-e1000-5.2.20-yocto-standard</i>	<i>kernel-module-e1000e-5.2.20-yocto-standard</i>	
<i>kernel-module-e752x-edac-5.2.20-yocto-standard</i>	<i>kernel-module-ebt-802-3-5.2.20-yocto-standard</i>	
<i>kernel-module-ebt-among-5.2.20-yocto-standard</i>	<i>kernel-module-ebt-arp-5.2.20-yocto-standard</i>	
<i>kernel-module-ebt-arpreply-5.2.20-yocto-standard</i>	<i>kernel-module-ebt-dnat-5.2.20-yocto-standard</i>	
<i>kernel-module-ebt-ip-5.2.20-yocto-standard</i>	<i>kernel-module-ebt-limit-5.2.20-yocto-standard</i>	
<i>kernel-module-ebt-log-5.2.20-yocto-standard</i>	<i>kernel-module-ebt-mark-5.2.20-yocto-standard</i>	
<i>kernel-module-ebt-mark-m-5.2.20-yocto-standard</i>	<i>kernel-module-ebt-nflog-5.2.20-yocto-standard</i>	
<i>kernel-module-ebt-pkttype-5.2.20-yocto-standard</i>	<i>kernel-module-ebt-redirect-5.2.20-yocto-standard</i>	
<i>kernel-module-ebt-snat-5.2.20-yocto-standard</i>	<i>kernel-module-ebt-stp-5.2.20-yocto-standard</i>	
<i>kernel-module-ebt-vlan-5.2.20-yocto-standard</i>	<i>kernel-module-ebtable-broute-5.2.20-yocto-standard</i>	
<i>kernel-module-ebtable-filter-5.2.20-yocto-standard</i>	<i>kernel-module-ebtable-nat-5.2.20-yocto-standard</i>	
<i>kernel-module-ebtables-5.2.20-yocto-standard</i>	<i>kernel-module-echainiv-5.2.20-yocto-standard</i>	
<i>kernel-module-EEPROM-93cx6-5.2.20-yocto-standard</i>	<i>kernel-module-eivars-5.2.20-yocto-standard</i>	
<i>kernel-module-ftdi-sio-5.2.20-yocto-standard</i>	<i>kernel-module-fuse-5.2.20-yocto-standard</i>	
<i>kernel-module-g-acm-ms-5.2.20-yocto-standard</i>	<i>kernel-module-g-audio-5.2.20-yocto-standard</i>	
<i>kernel-module-g-cdc-5.2.20-yocto-standard</i>	<i>kernel-module-g-dbgp-5.2.20-yocto-standard</i>	
<i>kernel-module-g-ether-5.2.20-yocto-standard</i>	<i>kernel-module-g-ffs-5.2.20-yocto-standard</i>	
<i>kernel-module-g-hid-5.2.20-yocto-standard</i>	<i>kernel-module-g-mass-storage-5.2.20-yocto-standard</i>	
<i>kernel-module-g-midi-5.2.20-yocto-standard</i>	<i>kernel-module-g-multi-5.2.20-yocto-standard</i>	
<i>kernel-module-g-ncm-5.2.20-yocto-standard</i>	<i>kernel-module-g-printer-5.2.20-yocto-standard</i>	
<i>kernel-module-g-serial-5.2.20-yocto-standard</i>	<i>kernel-module-g-zero-5.2.20-yocto-standard</i>	
<i>kernel-module-gadgetfs-5.2.20-yocto-standard</i>	<i>kernel-module-gcm-5.2.20-yocto-standard</i>	
<i>kernel-module-gf128mul-5.2.20-yocto-standard</i>	<i>kernel-module-ghash-generic-5.2.20-yocto-standard</i>	
<i>kernel-module-gpio-exar-5.2.20-yocto-standard</i>	<i>kernel-module-gpio-keys-5.2.20-yocto-standard</i>	
<i>kernel-module-gpio-wcove-5.2.20-yocto-standard</i>	<i>kernel-module-hci-uart-5.2.20-yocto-standard</i>	
<i>kernel-module-hid-sensor-hub-5.2.20-yocto-standard</i>	<i>kernel-module-hidp-5.2.20-yocto-standard</i>	
<i>kernel-module-hwmon-vid-5.2.20-yocto-standard</i>	<i>kernel-module-i2c-designware-pci-5.2.20-yocto-standard</i>	
<i>kernel-module-i2c-i801-5.2.20-yocto-standard</i>	<i>kernel-module-i2c-ismt-5.2.20-yocto-standard</i>	
<i>kernel-module-i2c-smbus-5.2.20-yocto-standard</i>	<i>kernel-module-i3000-edac-5.2.20-yocto-standard</i>	
<i>kernel-module-i3200-edac-5.2.20-yocto-standard</i>	<i>kernel-module-i5000-edac-5.2.20-yocto-standard</i>	
<i>kernel-module-i5100-edac-5.2.20-yocto-standard</i>	<i>kernel-module-i5400-edac-5.2.20-yocto-standard</i>	
<i>kernel-module-i7300-edac-5.2.20-yocto-standard</i>	<i>kernel-module-i7core-edac-5.2.20-yocto-standard</i>	
<i>kernel-module-i8042-5.2.20-yocto-standard</i>	<i>kernel-module-i82975x-edac-5.2.20-yocto-standard</i>	
<i>kernel-module-i915-5.2.20-yocto-standard</i>	<i>kernel-module-igb-5.2.20-yocto-standard</i>	
<i>kernel-module-igbvf-5.2.20-yocto-standard</i>	<i>kernel-module-input-polldev-5.2.20-yocto-standard</i>	
<i>kernel-module-int3400-thermal-5.2.20-yocto-standard</i>	<i>kernel-module-int3402-thermal-5.2.20-yocto-standard</i>	
<i>kernel-module-int3403-thermal-5.2.20-yocto-standard</i>	<i>kernel-module-int340x-thermal-zone-5.2.20-yocto-standard</i>	
<i>kernel-module-intel-bxt-pmic-thermal-5.2.20-yocto-standard</i>	<i>kernel-module-intel-lpss-5.2.20-yocto-standard</i>	
<i>kernel-module-intel-lpss-acpi-5.2.20-yocto-standard</i>	<i>kernel-module-intel-lpss-pci-5.2.20-yocto-standard</i>	
<i>kernel-module-intel-pch-thermal-5.2.20-yocto-standard</i>	<i>kernel-module-intel-powerclamp-5.2.20-yocto-standard</i>	
<i>kernel-module-intel-rapl-5.2.20-yocto-standard</i>	<i>kernel-module-intel-soc-dts-iosf-5.2.20-yocto-standard</i>	
<i>kernel-module-intel-soc-dts-thermal-5.2.20-yocto-standard</i>	<i>kernel-module-ip-tables-5.2.20-yocto-standard</i>	
<i>kernel-module-ip-tunnel-5.2.20-yocto-standard</i>	<i>kernel-module-ipt-ah-5.2.20-yocto-standard</i>	
<i>kernel-module-ipt-clusterip-5.2.20-yocto-standard</i>	<i>kernel-module-ipt-ecn-5.2.20-yocto-standard</i>	
<i>kernel-module-ipt-reject-5.2.20-yocto-standard</i>	<i>kernel-module-ipt-rpfilter-5.2.20-yocto-standard</i>	
<i>kernel-module-ipt-synproxy-5.2.20-yocto-standard</i>	<i>kernel-module-iptable-filter-5.2.20-yocto-standard</i>	
<i>kernel-module-iptable-mangle-5.2.20-yocto-standard</i>	<i>kernel-module-iptable-nat-5.2.20-yocto-standard</i>	
<i>kernel-module-iptable-raw-5.2.20-yocto-standard</i>	<i>kernel-module-iptable-security-5.2.20-yocto-standard</i>	
<i>kernel-module-itco-wdt-5.2.20-yocto-standard</i>	<i>kernel-module-iwl9365-5.2.20-yocto-standard</i>	
<i>kernel-module-iwl4965-5.2.20-yocto-standard</i>	<i>kernel-module-iwldvm-5.2.20-yocto-standard</i>	
<i>kernel-module-iwlegacy-5.2.20-yocto-standard</i>	<i>kernel-module-iwlmvm-5.2.20-yocto-standard</i>	
<i>kernel-module-iwlwifi-5.2.20-yocto-standard</i>	<i>kernel-module-jme-5.2.20-yocto-standard</i>	

Table N.2. – License overview listing (continued)

Recipe	Version	Licenses
<i>kernel-module-kaweth-5.2.20-yocto-standard</i>	<i>kernel-module-khazad-5.2.20-yocto-standard</i>	
<i>kernel-module-lcd-5.2.20-yocto-standard</i>	<i>kernel-module-libcomposite-5.2.20-yocto-standard</i>	
<i>kernel-module-libcrc32c-5.2.20-yocto-standard</i>	<i>kernel-module-libphy-5.2.20-yocto-standard</i>	
<i>kernel-module-libps2-5.2.20-yocto-standard</i>	<i>kernel-module-llc-5.2.20-yocto-standard</i>	
<i>kernel-module-lm75-5.2.20-yocto-standard</i>	<i>kernel-module-lp-5.2.20-yocto-standard</i>	
<i>kernel-module-lpc-ich-5.2.20-yocto-standard</i>	<i>kernel-module-m25p80-5.2.20-yocto-standard</i>	
<i>kernel-module-mac80211-5.2.20-yocto-standard</i>	<i>kernel-module-mce-inject-5.2.20-yocto-standard</i>	
<i>kernel-module-mcs7830-5.2.20-yocto-standard</i>	<i>kernel-module-md4-5.2.20-yocto-standard</i>	
<i>kernel-module-mei-5.2.20-yocto-standard</i>	<i>kernel-module-mei-me-5.2.20-yocto-standard</i>	
<i>kernel-module-mei-txe-5.2.20-yocto-standard</i>	<i>kernel-module-mei-wdt-5.2.20-yocto-standard</i>	
<i>kernel-module-michael-mic-5.2.20-yocto-standard</i>	<i>kernel-module-mii-5.2.20-yocto-standard</i>	
<i>kernel-module-mt7601u-5.2.20-yocto-standard</i>	<i>kernel-module-mtd-5.2.20-yocto-standard</i>	
<i>kernel-module-mwifiex-5.2.20-yocto-standard</i>	<i>kernel-module-mwifiex-sdio-5.2.20-yocto-standard</i>	
<i>kernel-module-nbd-5.2.20-yocto-standard</i>	<i>kernel-module-net1080-5.2.20-yocto-standard</i>	
<i>kernel-module-net2280-5.2.20-yocto-standard</i>	<i>kernel-module-nf-conncount-5.2.20-yocto-standard</i>	
<i>kernel-module-nf-conntrack-5.2.20-yocto-standard</i>	<i>kernel-module-nf-conntrack-amanda-5.2.20-yocto-standard</i>	
<i>kernel-module-nf-conntrack-broadcast-5.2.20-yocto-standard</i>	<i>kernel-module-nf-conntrack-ftp-5.2.20-yocto-standard</i>	
<i>kernel-module-nf-conntrack-h323-5.2.20-yocto-standard</i>	<i>kernel-module-nf-conntrack-irc-5.2.20-yocto-standard</i>	
<i>kernel-module-nf-conntrack-netbios-ns-5.2.20-yocto-standard</i>	<i>kernel-module-nf-conntrack-netlink-5.2.20-yocto-standard</i>	
<i>kernel-module-nf-conntrack-pptp-5.2.20-yocto-standard</i>	<i>kernel-module-nf-conntrack-sane-5.2.20-yocto-standard</i>	
<i>kernel-module-nf-conntrack-sip-5.2.20-yocto-standard</i>	<i>kernel-module-nf-conntrack-tftp-5.2.20-yocto-standard</i>	
<i>kernel-module-nf-defrag-ipv4-5.2.20-yocto-standard</i>	<i>kernel-module-nf-log-common-5.2.20-yocto-standard</i>	
<i>kernel-module-nf-log-ipv4-5.2.20-yocto-standard</i>	<i>kernel-module-nf-nat-5.2.20-yocto-standard</i>	
<i>kernel-module-nf-nat-amanda-5.2.20-yocto-standard</i>	<i>kernel-module-nf-nat-ftp-5.2.20-yocto-standard</i>	
<i>kernel-module-nf-nat-h323-5.2.20-yocto-standard</i>	<i>kernel-module-nf-nat-irc-5.2.20-yocto-standard</i>	
<i>kernel-module-nf-nat-pptp-5.2.20-yocto-standard</i>	<i>kernel-module-nf-nat-sip-5.2.20-yocto-standard</i>	
<i>kernel-module-nf-nat-tftp-5.2.20-yocto-standard</i>	<i>kernel-module-nf-reject-ipv4-5.2.20-yocto-standard</i>	
<i>kernel-module-nf-synproxy-core-5.2.20-yocto-standard</i>	<i>kernel-module-nfnethlink-5.2.20-yocto-standard</i>	
<i>kernel-module-nfnethlink-log-5.2.20-yocto-standard</i>	<i>kernel-module-nfnethlink-queue-5.2.20-yocto-standard</i>	
<i>kernel-module-nls-cp850-5.2.20-yocto-standard</i>	<i>kernel-module-nls-utf8-5.2.20-yocto-standard</i>	
<i>kernel-module-p8022-5.2.20-yocto-standard</i>	<i>kernel-module-parport-5.2.20-yocto-standard</i>	
<i>kernel-module-parport-pc-5.2.20-yocto-standard</i>	<i>kernel-module-pcspkr-5.2.20-yocto-standard</i>	
<i>kernel-module-pegasus-5.2.20-yocto-standard</i>	<i>kernel-module-pktgen-5.2.20-yocto-standard</i>	
<i>kernel-module-pl2303-5.2.20-yocto-standard</i>	<i>kernel-module-pnd2-edac-5.2.20-yocto-standard</i>	
<i>kernel-module-portmux-intel-drcfg-5.2.20-yocto-standard</i>	<i>kernel-module-ppdev-5.2.20-yocto-standard</i>	
<i>kernel-module-processor-thermal-device-5.2.20-yocto-standard</i>	<i>kernel-module-psmouse-5.2.20-yocto-standard</i>	
<i>kernel-module-psnap-5.2.20-yocto-standard</i>	<i>kernel-module-pwm-lpss-5.2.20-yocto-standard</i>	
<i>kernel-module-pwm-lpss-pci-5.2.20-yocto-standard</i>	<i>kernel-module-pwm-lpss-platform-5.2.20-yocto-standard</i>	
<i>kernel-module-r8152-5.2.20-yocto-standard</i>	<i>kernel-module-radeon-5.2.20-yocto-standard</i>	
<i>kernel-module-rfcomm-5.2.20-yocto-standard</i>	<i>kernel-module-rndis-host-5.2.20-yocto-standard</i>	
<i>kernel-module-roles-5.2.20-yocto-standard</i>	<i>kernel-module-rpcsec-gss-krb5-5.2.20-yocto-standard</i>	
<i>kernel-module-rt2800lib-5.2.20-yocto-standard</i>	<i>kernel-module-rt2800mmio-5.2.20-yocto-standard</i>	
<i>kernel-module-rt2800pci-5.2.20-yocto-standard</i>	<i>kernel-module-rt2x00lib-5.2.20-yocto-standard</i>	
<i>kernel-module-rt2x00mmio-5.2.20-yocto-standard</i>	<i>kernel-module-rt2x00pci-5.2.20-yocto-standard</i>	
<i>kernel-module-rtc-rv8803-5.2.20-yocto-standard</i>	<i>kernel-module-rt18150-5.2.20-yocto-standard</i>	
<i>kernel-module-sch-cbq-5.2.20-yocto-standard</i>	<i>kernel-module-sch-codel-5.2.20-yocto-standard</i>	
<i>kernel-module-sch-dsmark-5.2.20-yocto-standard</i>	<i>kernel-module-sch-fq-codel-5.2.20-yocto-standard</i>	
<i>kernel-module-sch-gred-5.2.20-yocto-standard</i>	<i>kernel-module-sch-hfsc-5.2.20-yocto-standard</i>	
<i>kernel-module-sch-htb-5.2.20-yocto-standard</i>	<i>kernel-module-sch-ingress-5.2.20-yocto-standard</i>	
<i>kernel-module-sch-netem-5.2.20-yocto-standard</i>	<i>kernel-module-sch-prio-5.2.20-yocto-standard</i>	
<i>kernel-module-sch-red-5.2.20-yocto-standard</i>	<i>kernel-module-sch-sfq-5.2.20-yocto-standard</i>	
<i>kernel-module-sch-tbf-5.2.20-yocto-standard</i>	<i>kernel-module-sch-teql-5.2.20-yocto-standard</i>	
<i>kernel-module-scsi-debug-5.2.20-yocto-standard</i>	<i>kernel-module-seqiv-5.2.20-yocto-standard</i>	
<i>kernel-module-serio-5.2.20-yocto-standard</i>	<i>kernel-module-serpent-generic-5.2.20-yocto-standard</i>	
<i>kernel-module-sha1-generic-5.2.20-yocto-standard</i>	<i>kernel-module-sha512-generic-5.2.20-yocto-standard</i>	
<i>kernel-module-skx-edac-5.2.20-yocto-standard</i>	<i>kernel-module-silhc-5.2.20-yocto-standard</i>	
<i>kernel-module-slip-5.2.20-yocto-standard</i>	<i>kernel-module-smisc75xx-5.2.20-yocto-standard</i>	
<i>kernel-module-smisc95xx-5.2.20-yocto-standard</i>	<i>kernel-module-snd-ac97-codec-5.2.20-yocto-standard</i>	
<i>kernel-module-snd-ak4113-5.2.20-yocto-standard</i>	<i>kernel-module-snd-ak4114-5.2.20-yocto-standard</i>	
<i>kernel-module-snd-ak4xxx-adda-5.2.20-yocto-standard</i>	<i>kernel-module-snd-aloop-5.2.20-yocto-standard</i>	
<i>kernel-module-snd-atiixp-5.2.20-yocto-standard</i>	<i>kernel-module-snd-atiixp-modem-5.2.20-yocto-standard</i>	
<i>kernel-module-snd-ca0106-5.2.20-yocto-standard</i>	<i>kernel-module-snd-cmipci-5.2.20-yocto-standard</i>	
<i>kernel-module-snd-cs8427-5.2.20-yocto-standard</i>	<i>kernel-module-snd-ctxfi-5.2.20-yocto-standard</i>	
<i>kernel-module-snd-emu10k1-5.2.20-yocto-standard</i>	<i>kernel-module-snd-emu10k1-synth-5.2.20-yocto-standard</i>	
<i>kernel-module-snd-emu10k1x-5.2.20-yocto-standard</i>	<i>kernel-module-snd-emux-synth-5.2.20-yocto-standard</i>	
<i>kernel-module-snd-hda-codec-5.2.20-yocto-standard</i>	<i>kernel-module-snd-hda-codec-cirrus-5.2.20-yocto-standard</i>	
<i>kernel-module-snd-hda-codec-generic-5.2.20-yocto-standard</i>	<i>kernel-module-snd-hda-codec-hdmi-5.2.20-yocto-standard</i>	
<i>kernel-module-snd-hda-codec-idt-5.2.20-yocto-standard</i>	<i>kernel-module-snd-hda-codec-realtek-5.2.20-yocto-standard</i>	
<i>kernel-module-snd-hda-codec-via-5.2.20-yocto-standard</i>	<i>kernel-module-snd-hda-core-5.2.20-yocto-standard</i>	
<i>kernel-module-snd-hda-intel-5.2.20-yocto-standard</i>	<i>kernel-module-snd-hdsp-5.2.20-yocto-standard</i>	
<i>kernel-module-snd-hdspm-5.2.20-yocto-standard</i>	<i>kernel-module-snd-hrtimer-5.2.20-yocto-standard</i>	
<i>kernel-module-snd-hwdep-5.2.20-yocto-standard</i>	<i>kernel-module-snd-i2c-5.2.20-yocto-standard</i>	

Table N.2. – License overview listing (continued)

Recipe	Version	Licenses
<i>kernel-module-snd-ice1712-5.2.20-yocto-standard</i>	<i>kernel-module-snd-ice1724-5.2.20-yocto-standard</i>	
<i>kernel-module-snd-ice17xx-ak4xxx-5.2.20-yocto-standard</i>	<i>kernel-module-snd-mpu401-uart-5.2.20-yocto-standard</i>	
<i>kernel-module-snd-opl3-lib-5.2.20-yocto-standard</i>	<i>kernel-module-snd-opl3-synth-5.2.20-yocto-standard</i>	
<i>kernel-module-snd-oxygen-5.2.20-yocto-standard</i>	<i>kernel-module-snd-oxygen-lib-5.2.20-yocto-standard</i>	
<i>kernel-module-snd-pcm-5.2.20-yocto-standard</i>	<i>kernel-module-snd-pt2258-5.2.20-yocto-standard</i>	
<i>kernel-module-snd-rawmidi-5.2.20-yocto-standard</i>	<i>kernel-module-snd-rme96-5.2.20-yocto-standard</i>	
<i>kernel-module-snd-rme9652-5.2.20-yocto-standard</i>	<i>kernel-module-snd-seq-5.2.20-yocto-standard</i>	
<i>kernel-module-snd-seq-device-5.2.20-yocto-standard</i>	<i>kernel-module-snd-seq-midi-5.2.20-yocto-standard</i>	
<i>kernel-module-snd-seq-midi-emul-5.2.20-yocto-standard</i>	<i>kernel-module-snd-seq-midi-event-5.2.20-yocto-standard</i>	
<i>kernel-module-snd-seq-virmidi-5.2.20-yocto-standard</i>	<i>kernel-module-snd-timer-5.2.20-yocto-standard</i>	
<i>kernel-module-snd-util-mem-5.2.20-yocto-standard</i>	<i>kernel-module-snd-virtuoso-5.2.20-yocto-standard</i>	
<i>kernel-module-soc-button-array-5.2.20-yocto-standard</i>	<i>kernel-module-softdog-5.2.20-yocto-standard</i>	
<i>kernel-module-spi-nor-5.2.20-yocto-standard</i>	<i>kernel-module-spidev-5.2.20-yocto-standard</i>	
<i>kernel-module-stp-5.2.20-yocto-standard</i>	<i>kernel-module-tcpm-5.2.20-yocto-standard</i>	
<i>kernel-module-tcrypt-5.2.20-yocto-standard</i>	<i>kernel-module-tea-5.2.20-yocto-standard</i>	
<i>kernel-module-tipc-5.2.20-yocto-standard</i>	<i>kernel-module-tpm-5.2.20-yocto-standard</i>	
<i>kernel-module-tpm-atmel-5.2.20-yocto-standard</i>	<i>kernel-module-tpm-crb-5.2.20-yocto-standard</i>	
<i>kernel-module-tpm-infinion-5.2.20-yocto-standard</i>	<i>kernel-module-tpm-nsc-5.2.20-yocto-standard</i>	
<i>kernel-module-tpm-tis-5.2.20-yocto-standard</i>	<i>kernel-module-tpm-tis-core-5.2.20-yocto-standard</i>	
<i>kernel-module-tpm-vtpm-proxy-5.2.20-yocto-standard</i>	<i>kernel-module-ts-bm-5.2.20-yocto-standard</i>	
<i>kernel-module-ts-fsm-5.2.20-yocto-standard</i>	<i>kernel-module-ts-kmp-5.2.20-yocto-standard</i>	
<i>kernel-module-tun-5.2.20-yocto-standard</i>	<i>kernel-module-twofish-common-5.2.20-yocto-standard</i>	
<i>kernel-module-twofish-generic-5.2.20-yocto-standard</i>	<i>kernel-module-typec-5.2.20-yocto-standard</i>	
<i>kernel-module-typec-wcove-5.2.20-yocto-standard</i>	<i>kernel-module-u-audio-5.2.20-yocto-standard</i>	
<i>kernel-module-u-ether-5.2.20-yocto-standard</i>	<i>kernel-module-u-serial-5.2.20-yocto-standard</i>	
<i>kernel-module-udp-tunnel-5.2.20-yocto-standard</i>	<i>kernel-module-usb-f-acm-5.2.20-yocto-standard</i>	
<i>kernel-module-usb-f-ecm-5.2.20-yocto-standard</i>	<i>kernel-module-usb-f-ecm-subset-5.2.20-yocto-standard</i>	
<i>kernel-module-usb-f-fs-5.2.20-yocto-standard</i>	<i>kernel-module-usb-f-hid-5.2.20-yocto-standard</i>	
<i>kernel-module-usb-f-mass-storage-5.2.20-yocto-standard</i>	<i>kernel-module-usb-f-midi-5.2.20-yocto-standard</i>	
<i>kernel-module-usb-f-ncm-5.2.20-yocto-standard</i>	<i>kernel-module-usb-f-obex-5.2.20-yocto-standard</i>	
<i>kernel-module-usb-f-printer-5.2.20-yocto-standard</i>	<i>kernel-module-usb-f-rndis-5.2.20-yocto-standard</i>	
<i>kernel-module-usb-f-serial-5.2.20-yocto-standard</i>	<i>kernel-module-usb-f-ss-lb-5.2.20-yocto-standard</i>	
<i>kernel-module-usb-f-uac2-5.2.20-yocto-standard</i>	<i>kernel-module-usb-lp-5.2.20-yocto-standard</i>	
<i>kernel-module-usbnet-5.2.20-yocto-standard</i>	<i>kernel-module-usbserial-5.2.20-yocto-standard</i>	
<i>kernel-module-usbtest-5.2.20-yocto-standard</i>	<i>kernel-module-usbtouchscreen-5.2.20-yocto-standard</i>	
<i>kernel-module-uvesafb-5.2.20-yocto-standard</i>	<i>kernel-module-video-5.2.20-yocto-standard</i>	
<i>kernel-module-virtio-input-5.2.20-yocto-standard</i>	<i>kernel-module-w83627ehf-5.2.20-yocto-standard</i>	
<i>kernel-module-w83627hf-5.2.20-yocto-standard</i>	<i>kernel-module-wp512-5.2.20-yocto-standard</i>	
<i>kernel-module-x-tables-5.2.20-yocto-standard</i>	<i>kernel-module-x38-edac-5.2.20-yocto-standard</i>	
<i>kernel-module-x86-pkg-temp-thermal-5.2.20-yocto-standard</i>	<i>kernel-module-xcbc-5.2.20-yocto-standard</i>	
<i>kernel-module-xfrm-algo-5.2.20-yocto-standard</i>	<i>kernel-module-xfrm-user-5.2.20-yocto-standard</i>	
<i>kernel-module-xhci-plat-hcd-5.2.20-yocto-standard</i>	<i>kernel-module-xt-classify-5.2.20-yocto-standard</i>	
<i>kernel-module-xt-comment-5.2.20-yocto-standard</i>	<i>kernel-module-xt-connbytes-5.2.20-yocto-standard</i>	
<i>kernel-module-xt-connlimit-5.2.20-yocto-standard</i>	<i>kernel-module-xt-connmark-5.2.20-yocto-standard</i>	
<i>kernel-module-xt-conntrack-5.2.20-yocto-standard</i>	<i>kernel-module-xt-ct-5.2.20-yocto-standard</i>	
<i>kernel-module-xt-dccp-5.2.20-yocto-standard</i>	<i>kernel-module-xt-dscp-5.2.20-yocto-standard</i>	
<i>kernel-module-xt-ecn-5.2.20-yocto-standard</i>	<i>kernel-module-xt-esp-5.2.20-yocto-standard</i>	
<i>kernel-module-xt-hashlimit-5.2.20-yocto-standard</i>	<i>kernel-module-xt-helper-5.2.20-yocto-standard</i>	
<i>kernel-module-xt-hl-5.2.20-yocto-standard</i>	<i>kernel-module-xt-length-5.2.20-yocto-standard</i>	
<i>kernel-module-xt-limit-5.2.20-yocto-standard</i>	<i>kernel-module-xt-log-5.2.20-yocto-standard</i>	
<i>kernel-module-xt-mac-5.2.20-yocto-standard</i>	<i>kernel-module-xt-mark-5.2.20-yocto-standard</i>	
<i>kernel-module-xt-masquerade-5.2.20-yocto-standard</i>	<i>kernel-module-xt-multiport-5.2.20-yocto-standard</i>	
<i>kernel-module-xt-nat-5.2.20-yocto-standard</i>	<i>kernel-module-xt-netmap-5.2.20-yocto-standard</i>	
<i>kernel-module-xt-nflog-5.2.20-yocto-standard</i>	<i>kernel-module-xt-nfqueue-5.2.20-yocto-standard</i>	
<i>kernel-module-xt-pkttype-5.2.20-yocto-standard</i>	<i>kernel-module-xt-policy-5.2.20-yocto-standard</i>	
<i>kernel-module-xt-quota-5.2.20-yocto-standard</i>	<i>kernel-module-xt-realm-5.2.20-yocto-standard</i>	
<i>kernel-module-xt-redirect-5.2.20-yocto-standard</i>	<i>kernel-module-xt-sctp-5.2.20-yocto-standard</i>	
<i>kernel-module-xt-state-5.2.20-yocto-standard</i>	<i>kernel-module-xt-statistic-5.2.20-yocto-standard</i>	
<i>kernel-module-xt-string-5.2.20-yocto-standard</i>	<i>kernel-module-xt-tcpmss-5.2.20-yocto-standard</i>	
<i>kernel-module-xt-tcpudp-5.2.20-yocto-standard</i>	<i>kernel-module-xt-trace-5.2.20-yocto-standard</i>	
<i>kernel-module-xt-u32-5.2.20-yocto-standard</i>	<i>kernel-module-zaurus-5.2.20-yocto-standard</i>	
<i>kernel-modules</i>		
Imensors	3.5.0	GPLv2+, LGPLv2.1+
<i>Imensors-libensors</i>		
Imensors-config	1.0	MIT-X
<i>Imensors-config-libensors</i>		
lrzsz	0.12.20	GPLv2+
<i>lrzsz</i>		
lvm2	2.03.02	GPLv2, LGPLv2.1
<i>libdevmapper</i>	<i>lvm2</i>	

Table N.2. – License overview listing (continued)

Recipe	Version	Licenses
<i>lvm2-scripts</i>	<i>lvm2-udevrules</i>	
lximage-qt <i>lximage-qt</i>	0.14.1 <i>lximage-qt-locale-en-gb</i>	GPLv2
lxmenu-data <i>lxmenu-data</i>	0.1.5	LGPLv2.1
lxqt-about <i>lxqt-about</i>	0.14.1 <i>lxqt-about-locale-en-gb</i>	LGPLv2.1
lxqt-admin <i>lxqt-admin</i>	0.14.1 <i>lxqt-admin-locale-en-gb</i>	LGPLv2.1
lxqt-build-tools <i>lxqt-build-tools</i>	0.6.0	BSD-3-Clause
lxqt-config <i>lxqt-config</i>	0.14.1 <i>lxqt-config-locale-en-gb</i>	LGPLv2.1
lxqt-globalkeys <i>lxqt-globalkeys</i>	0.14.1	LGPLv2.1
lxqt-notificationd <i>lxqt-notificationd</i>	0.14.1	LGPLv2.1
lxqt-openssh-askpass <i>lxqt-openssh-askpass</i>	0.14.1	LGPLv2.1
lxqt-panel <i>lxqt-panel</i>	0.14.1	LGPLv2.1
lxqt-policykit <i>lxqt-policykit</i>	0.14.1	LGPLv2.1
lxqt-powermanagement <i>lxqt-powermanagement</i>	0.14.1	LGPLv2.1
lxqt-qtplugin <i>lxqt-qtplugin</i>	0.14.0	LGPLv2.1
lxqt-runner <i>lxqt-runner</i>	0.14.1	LGPLv2.1
lxqt-session <i>lxqt-session</i>	0.14.1	LGPLv2.1
lxqt-sudo <i>lxqt-sudo</i>	0.14.1	LGPLv2.1
lxqt-themes <i>lxqt-themes</i>	0.14.0	LGPLv2.1
lxqt-world <i>lxqt-world</i>	1.0	MIT
lzo <i>lzo</i>	2.10	GPLv2+
mcelog <i>mcelog</i>	164	GPLv2
mem-edit <i>mem-edit</i>	git	GPLv2
menu-cache <i>menu-cache</i>	1.1.0	LGPLv2.1+
mesa <i>libegl-mesa</i> <i>libgl-mesa</i> <i>libgles1-mesa</i> <i>mesa-megadriver</i>	19.1.6 <i>libgbm</i> <i>libglapi</i> <i>libgles2-mesa</i> <i>mesa-vulkan-drivers</i>	MIT
mesa-demos <i>mesa-demos</i>	8.4.0	MIT, PD
mini-x-session <i>mini-x-session</i>	0.1	GPLv2
minicom <i>minicom</i>	2.7.1	GPLv2+
mmc-utils <i>mmc-utils</i>	0.1	GPLv2

Table N.2. – License overview listing (continued)

Recipe	Version	Licenses
mobile-broadband-provider-info <i>mobile-broadband-provider-info</i>	20190618	PD
modutils-initscripts <i>modutils-initscripts</i>	1.0	PD
mozjs <i>libmozjs</i>	60.5.2	MPL-2.0
mpeg2dec <i>libmpeg2</i>	0.5.1	GPLv2+
mpfr <i>mpfr</i>	4.0.2	LGPLv3+
mpg123 <i>mpg123</i>	1.25.11	LGPLv2.1
msc-bug-report <i>msc-bug-report</i>	1.0	GPLv2
msc-completion <i>msc-completion</i>	1.0	MIT
msc-cpufreq <i>msc-cpufreq</i>	1.0	GPLv2
msc-init-script-early <i>msc-init-script-early</i>	1.0	MIT
msc-init-script-late <i>msc-init-script-late</i>	1.0	MIT
msc-ldk-benchmark <i>msc-ldk-benchmark</i>	git	GPLv2
msc-ldk-exhibition-safe <i>msc-ldk-exhibition-safe</i>	git	GPLv2
msc-ldk-verification <i>msc-ldk-verification</i>	git	GPLv2
msc-ldk-verification-apps <i>msc-ldk-verification-apps</i>	git	GPLv2
msc-linux-scripts <i>msc-linux-scripts</i>	git	GPLv2
msc-lxqt-config <i>msc-lxqt-config</i>	1.0	MIT
msc-wallpaper <i>msc-wallpaper</i>	git	GPLv2
mscio-cmd <i>mscio-cmd</i>	git	LGPLv2.1
mscio-drivers <i>kernel-module-devreg-5.2.20-yocto-standard</i> <i>kernel-module-eapi-ec-bl-5.2.20-yocto-standard</i> <i>kernel-module-eapi-ec-running-time-5.2.20-yocto-standard</i> <i>kernel-module-eapi-nvram-5.2.20-yocto-standard</i> <i>kernel-module-leds-gpio-acpi-5.2.20-yocto-standard</i> <i>mscio-drivers</i>	git	GPLv2
mscio-lib <i>mscio-lib</i>	git	LGPLv2.1
mscio-monitor <i>mscio-monitor</i>	git	GPLv2
mscio-setup <i>mscio-setup</i>	git	LGPLv2.1
mtd-utils <i>mt-utils</i>	2.1.1	GPLv2+
mtdev <i>mtdev</i>	1.1.5	MIT
muparser <i>muparser</i>	2.2.6	MIT
nano <i>nano</i>	2.2.5	GPLv2

Table N.2. – License overview listing (continued)

Recipe	Version	Licenses
ncurses <i>ncurses-libformw</i> <i>ncurses-libncurses</i> <i>ncurses-libpanelw</i> <i>ncurses-terminfo</i>	6.1 <i>ncurses-libmenuw</i> <i>ncurses-libncursesw</i> <i>ncurses-libtinfo</i> <i>ncurses-terminfo-base</i>	MIT
ndctl <i>ndctl</i>	v65	GPLv2+
neard <i>neard</i>	0.16	GPLv2
netbase <i>netbase</i>	5.6	GPLv2
netpipe <i>netpipe</i>	3.7.2	GPLv1
nettle <i>nettle</i>	3.5.1	LGPLv3+, GPLv2+
nfs-utils <i>nfs-utils-client</i>	2.4.1 <i>nfs-utils-mount</i>	MIT, GPLv2+, BSD
npth <i>npth</i>	1.6	LGPLv2+
nspr <i>nspr</i>	4.21	GPL-2.0, MPL-2.0, LGPL-2.1
nss <i>nss</i>	3.45	(MPL-2.0 & LGPL-2.1+), (MPL-2.0 & GPL-2.0+), MPL-2.0
ntp <i>ntp</i> <i>ntpdate</i>	4.2.8p13 <i>ntp-tickadj</i>	NTP
obconf-qt <i>obconf-qt</i>	0.14.1	LGPLv2.1
ofono <i>ofono</i>	1.30	GPLv2
openbox <i>openbox</i> <i>openbox-core</i> <i>openbox-theme-bear2</i> <i>openbox-theme-clearlooks-3.4</i> <i>openbox-theme-mikachu</i> <i>openbox-theme-onyx</i> <i>openbox-theme-orang</i>	3.6.1 <i>openbox-config</i> <i>openbox-theme-artwiz-boxed</i> <i>openbox-theme-clearlooks</i> <i>openbox-theme-clearlooks-olive</i> <i>openbox-theme-natura</i> <i>openbox-theme-onyx-citrus</i> <i>openbox-theme-syscrash</i>	GPLv2+
openssl <i>libcrypto</i> <i>openssl</i> <i>openssl-conf</i>	1.1.1d <i>libssl</i> <i>openssl-bin</i>	openssl
opkg-utils <i>update-alternatives-opkg</i>	0.4.1	GPLv2+
orc <i>liborc-0.4</i>	0.4.29	BSD-2-Clause, BSD-3-Clause
otter-browser <i>otter-browser</i>	1.0.01	GPLv3
oxygen-icons5 <i>oxygen-icons5</i>	5.64.0	LGPLv3
packagegroup-base <i>packagegroup-base</i> <i>packagegroup-base-acpi</i> <i>packagegroup-base-bluetooth</i> <i>packagegroup-base-extended</i> <i>packagegroup-base-keyboard</i> <i>packagegroup-base-nfs</i> <i>packagegroup-base-pci</i> <i>packagegroup-base-usb-gadget</i>	1.0 <i>packagegroup-base-3g</i> <i>packagegroup-base-alsa</i> <i>packagegroup-base-ext2</i> <i>packagegroup-base-ipv6</i> <i>packagegroup-base-nfc</i> <i>packagegroup-base-pci</i> <i>packagegroup-base-usb-host</i>	MIT

Table N.2. – License overview listing (continued)

Recipe	Version	Licenses
<i>packagegroup-base-wifi</i>	<i>packagegroup-base-zeroconf</i>	
<i>packagegroup-distro-base</i>	<i>packagegroup-machine-base</i>	
packagegroup-core-boot <i>packagegroup-core-boot</i>	1.0	MIT
packagegroup-core-ssh-dropbear <i>packagegroup-core-ssh-dropbear</i>	1.0	MIT
packagegroup-core-x11 <i>packagegroup-core-x11-utils</i>	1.0	MIT
packagegroup-core-x11-base <i>packagegroup-core-x11-base</i>	1.0	MIT
packagegroup-core-x11-xserver <i>packagegroup-core-x11-xserver</i>	1.0	MIT
packagegroup-lxqt-base <i>packagegroup-lxqt-base</i>	1.0	MIT
packagegroup-msc-ldk-core <i>packagegroup-msc-ldk-core</i>	1.0	MIT
packagegroup-msc-lxqt <i>packagegroup-msc-lxqt</i> <i>packagegroup-msc-lxqt-base</i>	1.0	MIT <i>packagegroup-msc-lxqt-apps</i> <i>packagegroup-msc-lxqt-games</i>
packagegroup-mscio <i>packagegroup-mscio</i>	1.0	MIT
packagegroup-tools-in-x <i>packagegroup-tools-in-x</i>	1.0	MIT
pango <i>pango</i>	1.44.6	LGPLv2.0+
parole <i>parole</i>	1.0.4 <i>parole-locale-en-gb</i>	GPLv2
parted <i>parted</i>	3.2	GPLv3+
pavucontrol-qt <i>pavucontrol-qt</i>	0.14.1	GPLv2
pci2uio <i>kernel-module-pci2uio-5.2.20-yocto-standard</i>	git <i>pci2uio</i>	GPLv2
pciutils <i>libpci</i> <i>pciutils-ids</i>	3.6.2 <i>pciutils</i>	GPLv2+
pcmanfm-qt <i>pcmanfm-qt</i>	0.14.1 <i>pcmanfm-qt-locale-en-gb</i>	GPLv2
perl <i>perl</i>	5.30.0 <i>perl-module-config-heavy</i>	Artistic-1.0, GPL-1.0+
pinentry <i>pinentry</i>	1.1.0	GPLv2
pixman <i>pixman</i>	0.38.4	MIT, MIT-style, PD
pm-utils <i>pm-utils</i>	1.4.1	GPLv2
polkit <i>polkit</i>	0.116	LGPLv2+
polkit-group-rule-datetime <i>polkit-group-rule-datetime</i>	1.0	MIT
polkit-qt-1 <i>polkit-qt-1</i>	0.112.0	LGPLv2.1
popt <i>popt</i>	1.16	MIT
powertop <i>powertop</i> <i>powertop-locale-en-us</i>	2.10 <i>powertop-locale-en-gb</i>	GPLv2
procps	3.3.15	GPLv2+, LGPLv2+

Table N.2. – License overview listing (continued)

Recipe	Version	Licenses
<i>procps</i>		
proxy-config <i>proxy-config</i>	1.0	MIT
pulseaudio	12.2	LGPLv2.1+, MIT, BSD-3-Clause
<i>libpulse</i>	<i>libpulse-mainloop-glib</i>	
<i>libpulse-simple</i>	<i>libpulsecommon</i>	
<i>libpulsecore</i>	<i>pulseaudio-lib-alsa-util</i>	
<i>pulseaudio-lib-protocol-native</i>	<i>pulseaudio-module-alsa-card</i>	
<i>pulseaudio-module-alsa-sink</i>	<i>pulseaudio-module-alsa-source</i>	
<i>pulseaudio-module-always-sink</i>	<i>pulseaudio-module-augment-properties</i>	
<i>pulseaudio-module-card-restore</i>	<i>pulseaudio-module-console-kit</i>	
<i>pulseaudio-module-default-device-restore</i>	<i>pulseaudio-module-detect</i>	
<i>pulseaudio-module-device-manager</i>	<i>pulseaudio-module-device-restore</i>	
<i>pulseaudio-module-filter-apply</i>	<i>pulseaudio-module-filter-heuristics</i>	
<i>pulseaudio-module-intended-roles</i>	<i>pulseaudio-module-native-protocol-unix</i>	
<i>pulseaudio-module-null-sink</i>	<i>pulseaudio-module-position-event-sounds</i>	
<i>pulseaudio-module-rescue-streams</i>	<i>pulseaudio-module-role-cork</i>	
<i>pulseaudio-module-stream-restore</i>	<i>pulseaudio-module-suspend-on-idle</i>	
<i>pulseaudio-module-switch-on-port-available</i>	<i>pulseaudio-module-udev-detect</i>	
<i>pulseaudio-module-x11-cork-request</i>	<i>pulseaudio-module-x11-publish</i>	
<i>pulseaudio-module-x11-xsmp</i>	<i>pulseaudio-server</i>	
python	2.7.17	PSFv2
<i>libpython2</i>	<i>python-2to3</i>	
<i>python-argparse</i>	<i>python-audio</i>	
<i>python-bsddb</i>	<i>python-codecs</i>	
<i>python-compile</i>	<i>python-compiler</i>	
<i>python-compression</i>	<i>python-contextlib</i>	
<i>python-core</i>	<i>python-crypt</i>	
<i>python-ctypes</i>	<i>python-curses</i>	
<i>python-datetime</i>	<i>python-db</i>	
<i>python-debugger</i>	<i>python-difflib</i>	
<i>python-distutils</i>	<i>python-doctest</i>	
<i>python-email</i>	<i>python-fcntl</i>	
<i>python-gdbm</i>	<i>python-hotshot</i>	
<i>python-html</i>	<i>python-idle</i>	
<i>python-image</i>	<i>python-io</i>	
<i>python-json</i>	<i>python-lang</i>	
<i>python-logging</i>	<i>python-mailbox</i>	
<i>python-math</i>	<i>python-mime</i>	
<i>python-misc</i>	<i>python-mmap</i>	
<i>python-modules</i>	<i>python-multiprocessing</i>	
<i>python-netclient</i>	<i>python-netserver</i>	
<i>python-numbers</i>	<i>python-pickle</i>	
<i>python-pkgutil</i>	<i>python-plistlib</i>	
<i>python-pprint</i>	<i>python-profile</i>	
<i>python-pydoc</i>	<i>python-re</i>	
<i>python-resource</i>	<i>python-robotparser</i>	
<i>python-runpy</i>	<i>python-shell</i>	
<i>python-smtpd</i>	<i>python-sqlite3</i>	
<i>python-stringold</i>	<i>python-subprocess</i>	
<i>python-syslog</i>	<i>python-terminal</i>	
<i>python-textutils</i>	<i>python-threading</i>	
<i>python-tkinter</i>	<i>python-unittest</i>	
<i>python-unixadmin</i>	<i>python-xml</i>	
<i>python-xmllrpc</i>	<i>python-zlib</i>	
python-imaging	1.1.7	MIT
<i>python-imaging</i>		
python3	3.7.5	PSFv2
<i>libpython3</i>	<i>python3-2to3</i>	
<i>python3-asyncio</i>	<i>python3-audio</i>	
<i>python3-codecs</i>	<i>python3-compile</i>	
<i>python3-compression</i>	<i>python3-core</i>	
<i>python3-crypt</i>	<i>python3-ctypes</i>	
<i>python3-curses</i>	<i>python3-datetime</i>	
<i>python3-db</i>	<i>python3-debugger</i>	
<i>python3-difflib</i>	<i>python3-distutils</i>	
<i>python3-distutils-windows</i>	<i>python3-doctest</i>	
<i>python3-email</i>	<i>python3-fcntl</i>	

Table N.2. – License overview listing (continued)

Recipe	Version	Licenses
<i>python3-html</i>	<i>python3-idle</i>	
<i>python3-image</i>	<i>python3-io</i>	
<i>python3-json</i>	<i>python3-logging</i>	
<i>python3-mailbox</i>	<i>python3-math</i>	
<i>python3-mime</i>	<i>python3-misc</i>	
<i>python3-mmap</i>	<i>python3-modules</i>	
<i>python3-multiprocessing</i>	<i>python3-netclient</i>	
<i>python3-netserver</i>	<i>python3-numbers</i>	
<i>python3-pickle</i>	<i>python3-pkgutil</i>	
<i>python3-plistlib</i>	<i>python3-pprint</i>	
<i>python3-profile</i>	<i>python3-pydoc</i>	
<i>python3-resource</i>	<i>python3-shell</i>	
<i>python3-smtpd</i>	<i>python3-sqlite3</i>	
<i>python3-stringold</i>	<i>python3-syslog</i>	
<i>python3-terminal</i>	<i>python3-threading</i>	
<i>python3-tkinter</i>	<i>python3-typing</i>	
<i>python3-unittest</i>	<i>python3-unixadmin</i>	
<i>python3-venv</i>	<i>python3-xml</i>	
<i>python3-xmlrpc</i>		
python3-dbus	1.2.12	MIT
<i>python3-dbus</i>		
python3-iniparse	0.4	MIT, PSF
<i>python3-iniparse</i>		
python3-pycairo	1.18.1	LGPLv2.1, MPLv1.1
<i>python3-pycairo</i>		
python3-pyobject	3.34.0	LGPLv2.1
<i>python3-pyobject</i>		
python3-six	1.10.0	MIT
<i>python3-six</i>		
pyxdg	0.26	LGPLv2
<i>pyxdg</i>		
qps	1.10.20	GPLv2
<i>qps</i>		
qtbase	5.13.2	(GPL-2.0+ LGPL-3.0 The-Qt-Company-Commercial), (GPL-3.0 & The-Qt-Company-GPL-Exception-1.0 The-Qt-Company-Commercial), GFDL-1.3, BSD
<i>qtbase</i>	<i>qtbase-plugins</i>	
<i>qtbase-qmlplugins</i>		
qtdeclarative	5.13.2	(GPL-2.0+ LGPL-3.0 The-Qt-Company-Commercial), (GPL-3.0 & The-Qt-Company-GPL-Exception-1.0 The-Qt-Company-Commercial), GFDL-1.3, BSD
<i>qtdeclarative</i>	<i>qtdeclarative-plugins</i>	
<i>qtdeclarative-qmlplugins</i>		
qterminal	0.14.1	GPLv2
<i>qterminal</i>		
qtermwidget	0.14.1	GPLv2
<i>qtermwidget</i>		
qtimagemformats	5.13.2	(GPL-2.0+ LGPL-3.0 The-Qt-Company-Commercial), (GPL-3.0 & The-Qt-Company-GPL-Exception-1.0 The-Qt-Company-Commercial), GFDL-1.3, BSD
<i>qtimagemformats-plugins</i>		

Table N.2. – License overview listing (continued)

Recipe	Version	Licenses
qtlocation	5.13.2	(GPL-2.0+ LGPL-3.0 The-Qt-Company-Commercial), (GPL-3.0 & The-Qt-Company-GPL-Exception-1.0 The-Qt-Company-Commercial), Apache-2.0, MIT, openssl, BSL-1.0, GFDL-1.3, BSD
<i>qtlocation</i> <i>qtlocation-qmlplugins</i>	<i>qtlocation-plugins</i>	
qtmultimedia	5.13.2	(GPL-2.0+ LGPL-3.0 The-Qt-Company-Commercial), (GPL-3.0 & The-Qt-Company-GPL-Exception-1.0 The-Qt-Company-Commercial), GFDL-1.3, BSD
<i>qtmultimedia</i> <i>qtmultimedia-qmlplugins</i>	<i>qtmultimedia-plugins</i>	
qtsensors	5.13.2	(GPL-2.0+ LGPL-3.0 The-Qt-Company-Commercial), (GPL-3.0 & The-Qt-Company-GPL-Exception-1.0 The-Qt-Company-Commercial), GFDL-1.3, BSD
<i>qtsensors</i> <i>qtsensors-qmlplugins</i>	<i>qtsensors-plugins</i>	
qtsvg	5.13.2	(GPL-2.0+ LGPL-3.0 The-Qt-Company-Commercial), (GPL-3.0 & The-Qt-Company-GPL-Exception-1.0 The-Qt-Company-Commercial), GFDL-1.3, BSD
<i>qtsvg</i> <i>qtsvg-qmlplugins</i>	<i>qtsvg-plugins</i>	
qtwebchannel	5.13.2	(GPL-2.0+ LGPL-3.0 The-Qt-Company-Commercial), (GPL-3.0 & The-Qt-Company-GPL-Exception-1.0 The-Qt-Company-Commercial), GFDL-1.3, BSD
<i>qtwebchannel</i> <i>qtwebchannel-qmlplugins</i>	<i>qtwebchannel-plugins</i>	
qtwebkit	5.13.2	BSD, LGPLv2+, GPL-2.0
<i>qtwebkit</i> <i>qtwebkit-qmlplugins</i>	<i>qtwebkit-plugins</i>	
qtx11extras	5.13.2	(GPL-2.0+ LGPL-3.0), (GPL-3.0 & The-Qt-Company-GPL-Exception-1.0), GFDL-1.3, BSD, The-Qt-Company-Commercial
<i>qtx11extras</i> <i>qtx11extras-qmlplugins</i>	<i>qtx11extras-plugins</i>	

Table N.2. – License overview listing (continued)

Recipe	Version	Licenses
qtxmlpatterns	5.13.2	(GPL-2.0+ LGPL-3.0 The-Qt-Company-Commercial), (GPL-3.0 & The-Qt-Company-GPL-Exception-1.0 The-Qt-Company-Commercial), GFDL-1.3, BSD
<i>qtxmlpatterns</i> <i>qtxmlpatterns-qmlplugins</i>	<i>qtxmlpatterns-plugins</i>	
readline <i>readline</i>	8.0	GPLv3+
rgb <i>rgb</i>	1.0.6	MIT-X
rpcbind <i>rpcbind</i>	1.2.5	BSD
rpm <i>python3-rpm</i>	4.14.2.1 <i>rpm</i>	GPL-2.0
run-postinsts <i>run-postinsts</i>	1.0	MIT
sbc <i>sbc</i>	1.4	LGPLv2.1+
shadow <i>shadow</i>	4.6 <i>shadow-base</i>	BSD, Artistic-1.0
shadow-securetty <i>shadow-securetty</i>	4.6	MIT
shared-mime-info <i>shared-mime-info</i>	1.10 <i>shared-mime-info-data</i>	GPLv2
smartmontools <i>smartmontools-ctl</i>	6.3	GPLv2
solid <i>solid</i>	5.64.0 <i>solid-locale-en-gb</i>	LGPLv2.1
speex <i>speex</i>	1.2.0	BSD
speexdsp <i>speexdsp</i>	1.2rc3	BSD
spi-register <i>spi-register</i>	git	GPLv2
sqlite3 <i>libsqlite3</i>	3.29.0	PD
strace <i>strace</i>	5.3	LGPL-2.1+, GPL-2+
stress-ng <i>stress-ng</i>	0.10.00	GPLv2
sudo <i>sudo</i>	1.8.27	ISC, BSD, Zlib
superiotool <i>superiotool</i>	6637	GPLv2
system-test-controller-config <i>system-test-controller-config</i>	1.0	MIT
system-test-controller-v2 <i>system-test-controller-v2</i>	git	GPLv2
sysvinit <i>sysvinit</i>	2.88dsf <i>sysvinit-pidof</i>	GPLv2+
sysvinit-inittab <i>sysvinit-inittab</i>	2.88dsf	GPLv2
taglib <i>taglib</i>	1.11.1 <i>taglib-c</i>	LGPLv2.1, MPL-1.1
tcp-wrappers <i>libwrap</i>	7.6	BSD

Table N.2. – License overview listing (continued)

Recipe	Version	Licenses
tcpdump <i>tcpdump</i>	4.9.3	BSD
thin-provisioning-tools <i>thin-provisioning-tools</i>	0.8.5	GPLv3
tiff <i>tiff</i>	4.0.10	BSD-2-Clause
tiny-shell <i>tiny-shell</i>	git	GPLv2
turbostat <i>turbostat</i>	3.4	GPLv2
tzdata <i>tzdata</i> <i>tzdata-americas</i> <i>tzdata-arctic</i> <i>tzdata-atlantic</i> <i>tzdata-core</i> <i>tzdata-misc</i> <i>tzdata-posix</i>	2019c <i>tzdata-africa</i> <i>tzdata-antarctica</i> <i>tzdata-asia</i> <i>tzdata-australia</i> <i>tzdata-europe</i> <i>tzdata-pacific</i> <i>tzdata-right</i>	PD, BSD, BSD-3-Clause
udev-extraconf <i>udev-extraconf</i>	1.1	MIT
udisks2 <i>udisks2</i> <i>udisks2-locale-en-gb</i>	2.8.2 <i>udisks2-libs</i>	GPLv2+, LGPLv2+
update-flash <i>update-flash</i>	git	GPLv2
update-rc.d <i>update-rc.d</i>	0.8	GPLv2+
usbutils <i>usbutils</i>	012	GPLv2+
useradd-misc <i>useradd-misc</i>	1.0	MIT
util-linux <i>util-linux-blkid</i> <i>util-linux-findmnt</i> <i>util-linux-libblkid</i> <i>util-linux-libsmartcols</i> <i>util-linux-lsblk</i> <i>util-linux-mcookie</i> <i>util-linux-sulogin</i> <i>util-linux-swapon</i> <i>util-linux-umount</i>	2.34 <i>util-linux-dmmsg</i> <i>util-linux-fstrim</i> <i>util-linux-libmount</i> <i>util-linux-libuuid</i> <i>util-linux-lscpu</i> <i>util-linux-mount</i> <i>util-linux-swaponoff</i> <i>util-linux-swaponoff</i>	GPLv2+, LGPLv2.1+, BSD-3-Clause, BSD-4-Clause
volume-key <i>volume-key</i>	0.3.12 <i>volume-key-locale-en-gb</i>	GPLv2
vulkan-loader <i>vulkan-loader</i>	1.1.108	Apache-2.0
wayland <i>wayland</i>	1.17.0	MIT
wireless-regdb <i>wireless-regdb-static</i>	2019.06.03	ISC
wpa-supPLICANT <i>wpa-supPLICANT</i> <i>wpa-supPLICANT-passphrase</i>	2.9 <i>wpa-supPLICANT-cli</i>	BSD
xauth <i>xauth</i>	1.1	MIT-X
xcb-util <i>xcb-util</i>	0.4.0	MIT
xcb-util-image	0.4.0	MIT

Table N.2. – License overview listing (continued)

Recipe	Version	Licenses
<i>xcb-util-image</i>		
xcb-util-keysyms <i>xcb-util-keysyms</i>	0.4.0	MIT
xcb-util-renderutil <i>xcb-util-renderutil</i>	0.3.9	MIT
xcb-util-wm <i>xcb-util-wm</i>	0.4.1	MIT
xdg-user-dirs <i>xdg-user-dirs</i>	0.17	GPLv2
xdpyinfo <i>xdpyinfo</i>	1.3.2	MIT-X
xf86-input-libinput <i>xf86-input-libinput</i>	0.29.0	MIT-X
xf86-video-ast <i>xf86-video-ast</i>	1.1.5	MIT-X
xf86-video-fbdev <i>xf86-video-fbdev</i>	0.5.0	MIT-X
xf86-video-intel <i>xf86-video-intel</i>	2.99.917	MIT-X
xf86-video-vesa <i>xf86-video-vesa</i>	2.4.0	MIT-X
xfconf <i>xfconf</i>	4.14.1 <i>xfconf-locale-en-gb</i>	GPLv2
xhost <i>xhost</i>	1.0.8	MIT-X
xinit <i>xinit</i>	1.4.1	MIT-X
xinput <i>xinput</i>	1.6.3	MIT-X
xinput-calibrator <i>xinput-calibrator</i>	0.7.5	MIT-X
xkbcomp <i>xkbcomp</i>	1.4.2	MIT-X
xkeyboard-config <i>xkeyboard-config</i>	2.27 <i>xkeyboard-config-locale-en-gb</i>	MIT, MIT-style
xmodmap <i>xmodmap</i>	1.0.10	MIT
xrandr <i>xrandr</i>	1.5.1	MIT
xserver-nodm-init <i>xserver-nodm-init</i>	3.0	GPLv2
xserver-xf86-config <i>xserver-xf86-config</i>	0.1	MIT-X
xserver-xorg <i>xf86-video-modesetting</i> <i>xserver-xorg-extension-glx</i>	1.20.5 <i>xserver-xorg</i> <i>xserver-xorg-module-libint10</i>	MIT-X
xset <i>xset</i>	1.2.4	MIT
xterm <i>xterm</i>	349	MIT-X
xvinfo <i>xvinfo</i>	1.1.4	MIT-X
xz <i>liblzma</i>	5.2.4	PD
zip <i>zip</i>	3.0	BSD-3-Clause
zlib-intel <i>zlib-intel</i>	1.2.11.1.jtkv6.3	Zlib

Table N.2. – License overview listing (continued)

Recipe	Version	Licenses
zsh <i>zsh</i>	5.4.2	zsh
zsh-config <i>zsh-config</i>	1.0	MIT