

SPECIFICATION

[☒] Preliminary Specification
 [☐] Final Specification

Description **15.6" 1920(RGB)*1080 TFT-LCD Module**
Part Number **P1560FHF2MB00**

Customer		Industrial Product Dept, PDBU Tianma Microelectronics Co., Ltd.	
Signatures	Date	Approved By	Date
_____	_____	_____	_____
_____	_____	Reviewed By	_____
		Longping.Deng	2023/03/17
		Prepared By	_____
		Gang.Li	2023/03/17
Comments:			

* This cover page is for your Comments and Signatures back to TIANMA.

REVISION HISTORY

[illegible]

CONTENTS

1. SUMMARY	1
1.1 General Description	1
1.2 Features	1
2. GENERAL SPECIFICATIONS	2
3. INPUT / OUTPUT TERMINALS	3
3.1 CN1 Pin assignment (LCD Interface)	3
4. ABSOLUTE MAXIMUM RATINGS	5
5. ELECTRICAL CHARACTERISTICS	6
5.1 DC Characteristics for Panel Driving	6
5.2 DC Characteristics for Backlight Driving	6
5.3 Recommended Power ON/OFF Sequence	7
5.4 LCD Module Block Diagram	8
5.5 LVDS DC electrical characteristics	9
5.6 LVDS AC electrical characteristics	10
6. TIMING CHARACTERISTICS	11
6.1 LVDS signal timing characteristics	11
6.2 LVDS data input format	12
7. OPTICAL CHARACTERISTICS	13
8. RELIABILITY TEST	16
9. MECHANICAL DRAWING	17
10. PACKING DRAWING	18
11. PRECAUTIONS FOR USE OF LCD MODULES	19
11.1 Handling Precautions	19
11.2 Storage precautions	19
11.3 Transportation Precautions	19
11.4 Screen saver Precautions	19
11.5 Safety Precautions	19

1. Summary

1.1 General Description

This is a 15.6 inch a-Si TFT-LCD module with Normal- Black technology. It is composed of a TFT-LCD panel, a driver circuit, PCB, and a LED backlight unit. It is designed for medical diagnosis.

1.2 Features

- Ultra-wide viewing angle (Super Fine TFT (SFT))
 - High resolution(FHD)
 - High contrast ratio(2000:1)
 - Interface: 2 port LVDS(8bit)
 - LED driver integrated
 - Surface treatment(Anti-glare)
-
- Acquisition product for UL62368-1/CSA C22.2 No.62368-1-03 (File number: E170632)
 - Compliant with the European RoHS Directive (2011/65/EU) and Delegated Directive (2015/863/EU, Amending Annex II of 2011/65/EU)

2. General Specifications

Feature		Spec	Unit
Display Spec	Size	15.6 inches	
	Resolution	1920(RGB)x1080	
	Pixel Pitch	0.17925x0.17925	mm
	TFT Active Area	344.16*193.59	mm
	Technology Type	a-Si	
	Pixel Configuration	R.G.B Vertical Stripe	
	Display Mode	SFT, Normally Black	
	Surface Treatment	Anti-Glare	
	Viewing Direction	All	
Mechanical Characteristics	LCM (W x H x D)	350.66*205.24*3.0(without PCB)	mm
	Weight	346	g
Optical Characteristics	Luminance	350	cd/m ²
	Contrast Ratio	2000:1	
	NTSC	72	%
	Viewing Angle	88/88/88/88	degree
Electrical Characteristics	Interface	2 Port LVDS(8bit)	
	Color Depth	16.7 Million	color
	Power Consumption	LCD: 811.8 Backlight:4932	mW

Table 2.1 General TFT Specifications

3. Input / Output Terminals

3.1 CN1 Pin assignment (LCD Interface)

Connector Information	
LCD Module connector	MSAK24025P40D
Matching connector	I-PEX-20454-240T or equivalent

Table 3.1.1 Connector information

No	Symbol	I/O	Description	Comment
1	VCC	P	+3.3V input voltage	
2	VCC	P	+3.3V input voltage	
3	VCC	P	+3.3V input voltage	
4	GND	P	Ground	
5	GND	P	Ground	
6	ORX0-	I	-LVDS differential data input (R0~R5,G0)	
7	ORX0+	I	+LVDS differential data input (R0~R5 G0)	
8	ORX1-	I	-LVDS differential data input (G1~G5,B0,B1)	
9	ORX1+	I	+LVDS differential data input (G1~G5,B0,B1)	
10	GND	P	Ground	
11	ORX2-	I	-LVDS differential data input (B2~B5,-,-,DE)	
12	ORX2+	I	+LVDS differential data input (B2~B5,-,-,DE)	
13	ORXC-	I	-LVDS differential Clock input	
14	ORXC+	I	+LVDS differential Clock input	
15	GND	P	Ground	
16	ORX3-	I	-LVDS differential data input (R6~R7,G6~G7,B6~B7)	
17	ORX3+	I	+LVDS differential data input (R6~R7,G6~G7,B6~B7)	
18	GND	P	Ground	
19	ERX0-	I	-LVDS differential data input (R0~R5,G0)	
20	ERX0+	I	+LVDS differential data input (R0~R5,G0)	
21	ERX1-	I	-LVDS differential data input (G1~G5,B0,B1)	
22	ERX1+	II	+LVDS differential data input (G1~G5,B0,B1)	
23	GND	P	Ground	
24	ERX2-	I	-LVDS differential data input (B2~B5,-,-,-)	
25	ERX2+	I	+LVDS differential data input (B2~B5,-,-,-)	
26	ERXC-	I	-LVDS differential Clock input	
27	ERXC+	I	+LVDS differential Clock input	
28	GND	P	Ground	
29	ERX3-	I	-LVDS differential data input (R6~R7,G6~G7,B6~B7)	
30	ERX3+	I	+LVDS differential data input (R6~R7,G6~G7,B6~B7)	
31	GND	P	Ground	

32	GND	P	Ground	
33	GND	P	Ground	
34	NC	N	No connection	
35	PWM	I	Dimming control signal	
36	LED_EN	I	Backlight on/off control signal(1:on, 0:off)	
37	NC	N	No connection	
38	VLED	P	Backlight power supply: +12V	
39	VLED	P	Backlight power supply: +12V	
40	VLED	P	Backlight power supply: +12V	

Table 3.1.2 Pin Assignment for LCD Interface

Note1: I/O definition: I---Input, O---Output, P---Power/Ground, N---No connection


Note2: All of the GND pins should be connected to the system ground.

Note3: Display direction

PCB side →



Note4: 1st pin location

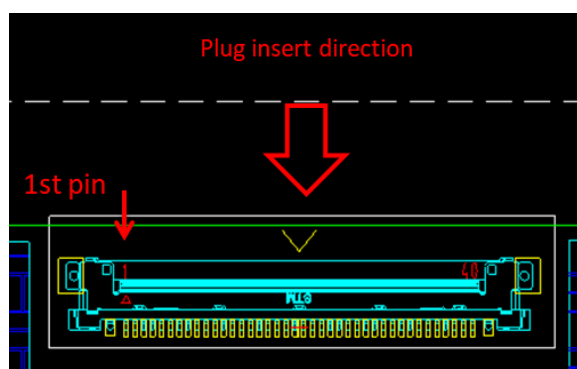

4. Absolute Maximum Ratings

Item	Symbol	MIN	MAX	Unit	Remark
Power Voltage	VCC	-0.3	5.0	V	Note1
Operating Temperature	Top	-10	60	°C	
Storage Temperature	Tst	-20	70	°C	
Relative Humidity Note2	RH	--	≤95	%	Ta≤40°C
		--	≤85	%	40°C<Ta≤50°C
		--	≤55	%	50°C<Ta≤60°C
		--	≤36	%	60°C<Ta≤70°C
		--	≤24	%	70°C<Ta≤80°C
Absolute Humidity	AH	--	≤70	g/m ³	Ta>70°C

Table 4.1 Absolute Maximum Ratings

Note1: Input voltage include all in put data.

Note2: Ta means the ambient temperature. It is necessary to limit the relative humidity to the specified temperature range. Condensation on the module is not allowed.

Note3: The absolute maximum rating values of this product are not allowed to be exceeded at any times. A module should be used with any of the absolute maximum ratings exceeded, the characteristics of the module may not be recovered, or in an extreme condition, the module may be permanently damaged.

5. Electrical Characteristics


5.1 DC Characteristics for Panel Driving

Item	Symbol	MIN	TYP	MAX	Unit	Remark
Supply Voltage	VCC	3.2	3.3	3.4	V	Without ripple
VCC current	IVCC	--	246	369	mA	
Input Signal Voltage	Low Level	VIL	DGND	--	0.2×VCC	V
	High Level	VIH	0.8×VCC	--	VCC	V
Power Consumption	60Hz	P	--	811.8	1217.7	mW
Inrush current	Irush	--	--	1.5	A	Note1

Table 5.1.1 Operating Voltages

Note1: To test the current dissipation, using the “white pattern” shown

VDD rising time is 470μs

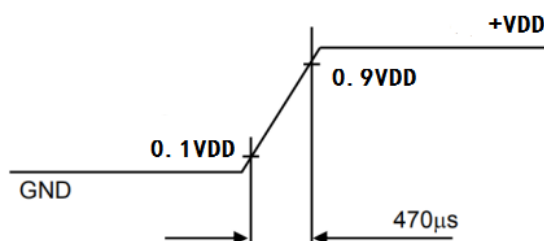

5.2 DC Characteristics for Backlight Driving

Item	Symbol	MIN	TYP	MAX	Unit	Remark
VLED	VLED	10.8	12	13.2	V	
VLED Current	IVLED	--	411	616.5	mA	
Backlight Power Consumption	P	--	4932	7398	mW	
PWM frequency	F	200	--	20K	HZ	
PWM duty	D	3	--	100	%	
PWM signal	High level	--	1.6	-	V	
	Low level	--	-	0.7	V	
LED_EN signal	High level	--	1.6	-	V	
	Low level	--	-	0.7	V	
LED life time	--	30000	--	-	Hrs	

Table 5.2.1 LED Backlight Characteristics

Note1: According to LED driver IC characteristics, the minimum value of VELD_PWM duty may vary with VLED_PWM frequency, higher the frequency, bigger the duty

Note2: Optical performance should be evaluated at Ta=25℃ only.

Note3: If LED is driven by high current, high ambient temperature & humidity condition. The life time of LED will be reduced.

Note4: Operating life means brightness goes down to 50% of initial brightness. Typical operating life time is estimated data.

5.3 Recommended Power ON/OFF Sequence

Symbol	Min	Typ	Max	Unit	Remark
t1	1	-	3	ms	
t2	-	-	1	ms	
t3	200	-	-	ms	
t4	1	-	-	ms	Note 1
t5	2	-	-	ms	
t6	2	-	-	ms	
t7	2	-	-	ms	
t8	2	-	-	ms	
t9	1	-	-	ms	
t10	200	-	-	ms	
t11	200	-	-	ms	
t12	1	-	3	ms	
t13	1000	-	-	ms	

Table 5.3.1 Power on sequence

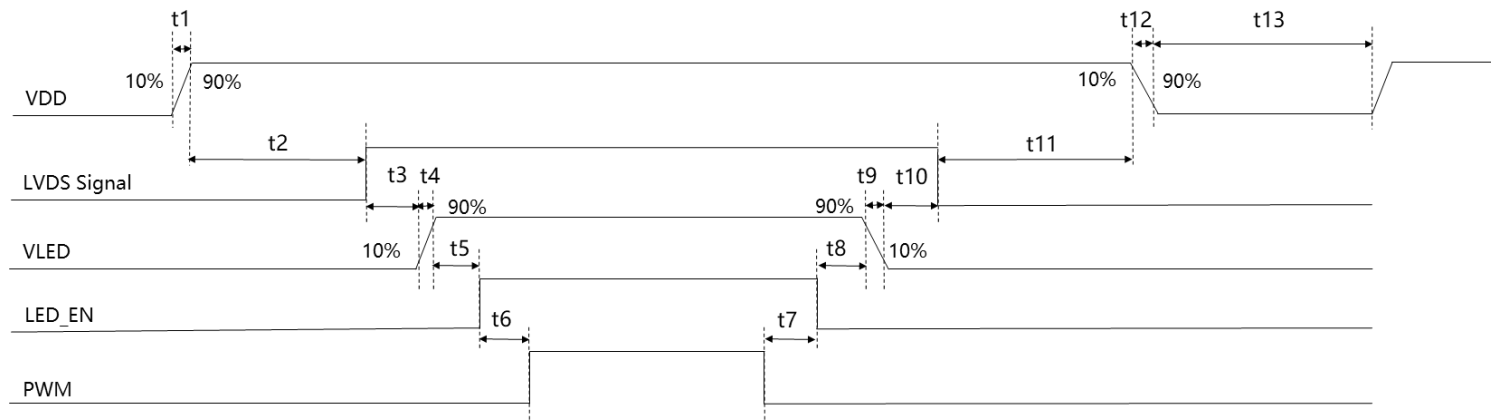


Figure 5.3.1 Power on sequence

Note1: Display at least two black frames before signal off. It is advised that backlight turned on later than display stabled.

Note2: The low level of these signals and analog powers are GND level.

Note3: All of the power and signals should be kept at GND level before power on. If there are residual voltages on them, the LCD might not work properly.

Note4: The power on/off sequence is the first version. It will be updated when the design is fixed.

Note5: Keep LED_EN at low level until the display has stabilized.

5.4 LCD Module Block Diagram

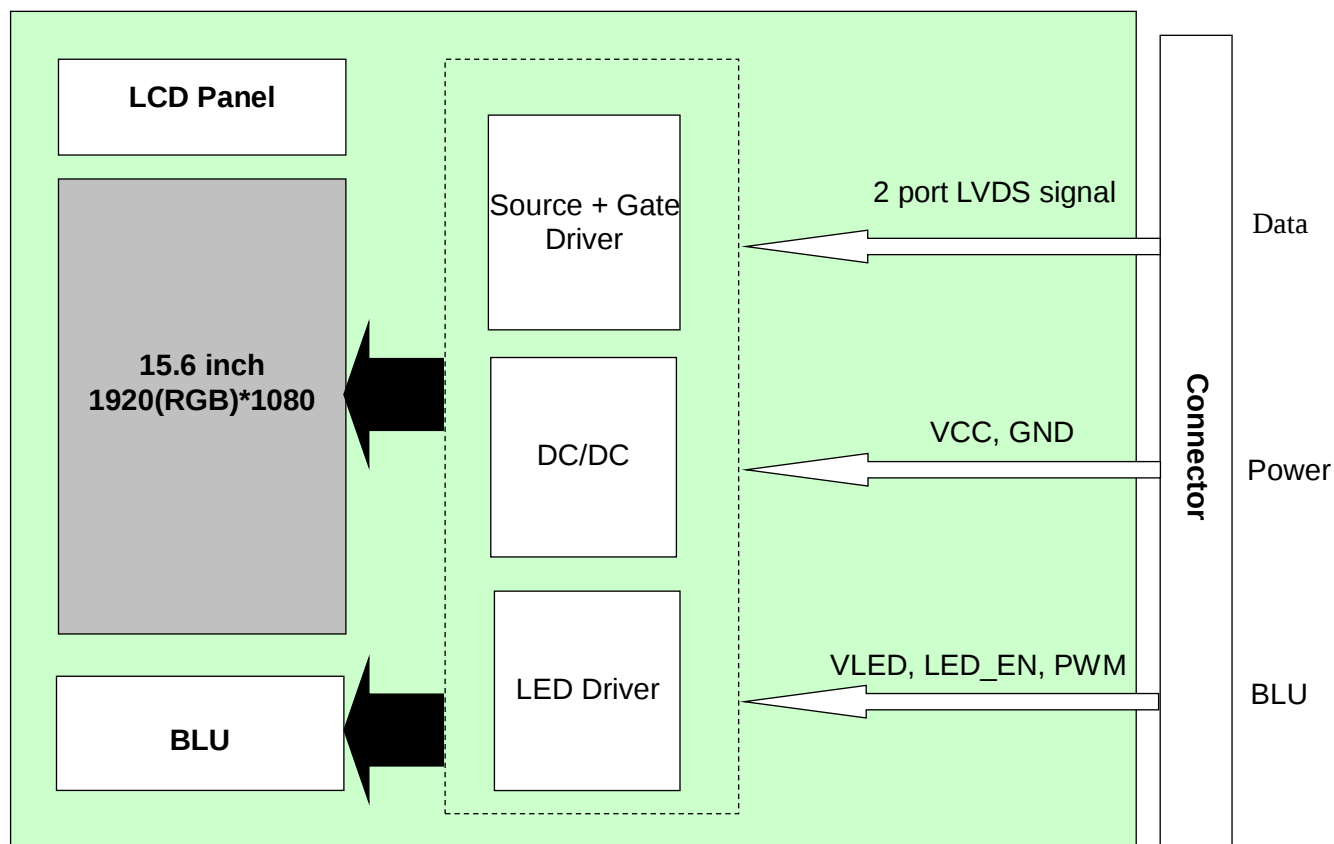



Figure 5.4.1 LCD Module Block Diagram

5.5 LVDS DC electrical characteristics

Parameter	Symbol	Min	Typ	Max	Unit	Condition
Differential Input high Threshold voltage	R_{xVTH}	-	-	+0.1	V	$R_{xVCM}=1.2V$
Differential Input Low Threshold voltage	R_{xVTL}	-0.1	-	-	V	
Input voltage range (signaled-end)	R_{xVIN}	0	-	$VCC-1.0$	V	
Differential Input common Mode voltage	R_{xVCM}	0.6	1.2	$2.4- V_{ID} /2$	V	
Differential Input voltage	$ V_{ID} $	0.1	0.4	0.6	V	

Table 5.5.1 LVDS DC Characteristics

Single end signals $n=0,1,2,3$

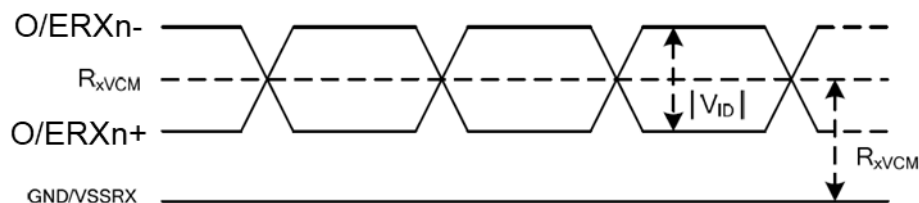

Differential signals

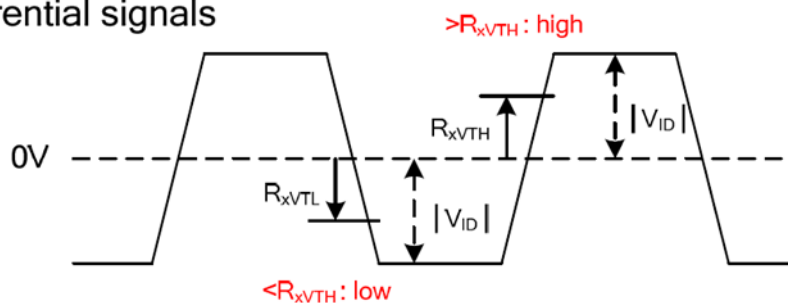


Figure 5.5.1 LVDS DC Characteristics

5.6 LVDS AC electrical characteristics

Parameter	Symbol	Min	Typ	Max	Unit	Condition
1data bit time	UI	-	1/7	-	RxTCLK	
Clock high time	T_{LVCH}	-	4	-	UI	
Clock low time	T_{LVCL}	-	3	-	UI	
Position1	T_{pos1}	-0.2	0	0.2	UI	
Position2	T_{pos2}	0.8	-	1.2		
Position3	T_{pos3}	0.8	1	1.2		
Position4	T_{pos4}	1.8	-	2.2		
Position5	T_{pos5}	1.8	2	2.2		
Position6	T_{pos6}	2.8	-	3.2		
Position7	T_{pos7}	2.8	3	3.2		
Position8	T_{pos8}	3.8	-	4.2		
Position9	T_{pos9}	3.8	4	4.2		
Position10	T_{pos10}	4.8	-	5.2	UI	
Position11	T_{pos11}	4.8	5	5.2		
Position12	T_{pos12}	5.8	-	6.2		
Position13	T_{pos13}	5.8	6	6.2		
Position14	T_{pos14}	6.8	-	7.2		

Table 5.6.1 LVDS AC Characteristics

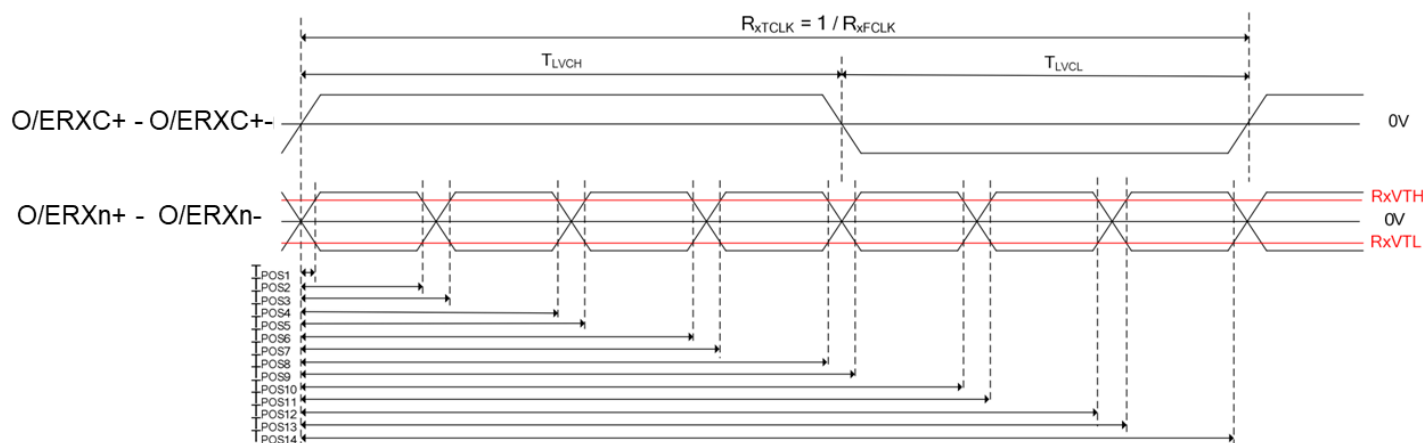


Figure 5.6.1 LVDS DC Characteristics

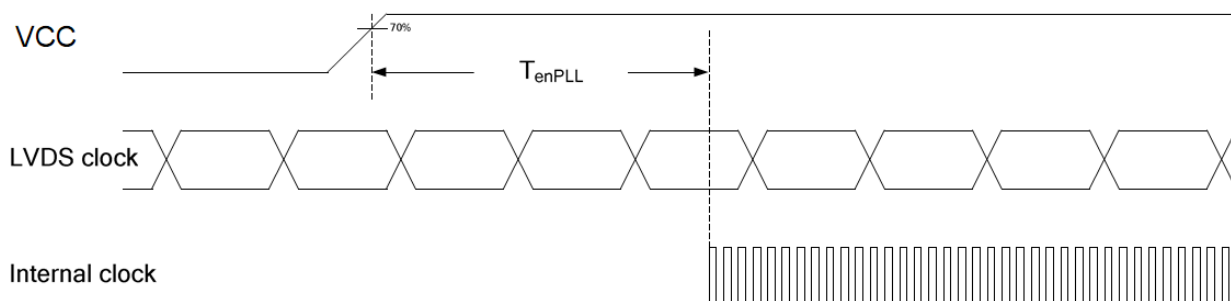


Figure 5.6.2 LVDS DC Characteristics

6. Timing Characteristics

6.1 LVDS signal timing characteristics

Parameter	Symbol	Value			Unit	Note
		min	typ	max		
CLK frequency	t_{clk}	66.5	67.87	75	MHZ	Note 1
Horizontal blanking time	t_{HBT}	48	50	99	t_{clk}	$t_{HBP} + t_{HFP}$
Horizontal display area	t_{HD}	960			t_{clk}	
Horizontal period	t_H	1008	1010	1059	t_{clk}	
Horizontal pulse width	t_{HPW}	2	2	2	t_{clk}	
Vertical blanking time	t_{VBT}	20	40	100	t_H	$t_{VBP} + t_{VFP}$
Vertical display area	t_{VD}	1080			t_H	
Vertical period	t_V	1100	1120	1180	t_H	
Vertical pulse width	t_{VPW}	--	2	--	t_H	
Frame rate	Fr	60			HZ	

Table 6.1.1 Input Timing Parameters

Note1: 1port LVDS timing setting. It is necessary to keep t_H and t_V within recommend value.

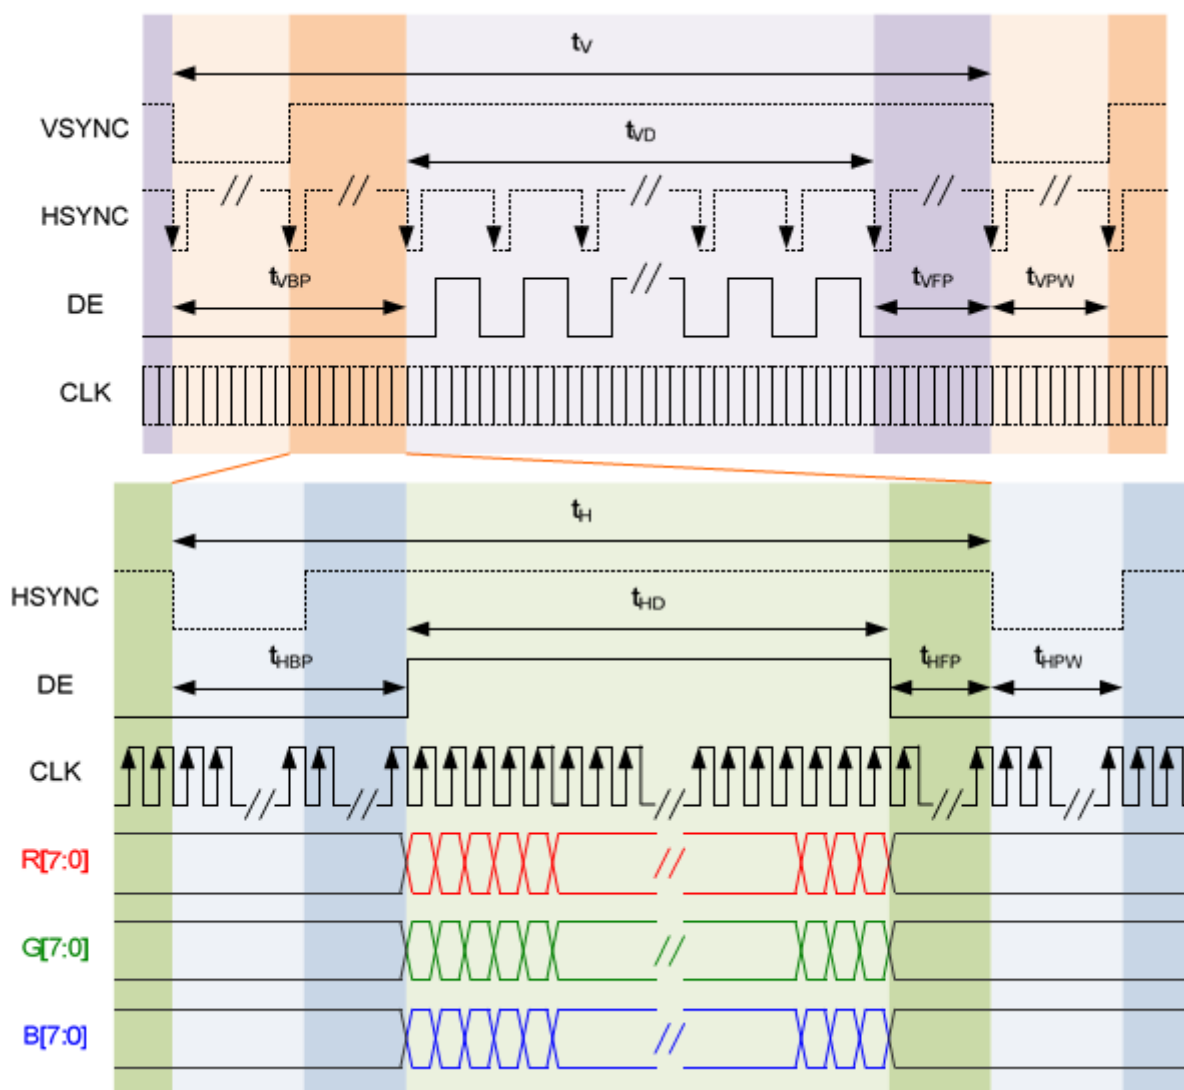


Figure 6.1.1 Clock and Data Input Timing Diagram

6.2 LVDS data mapping

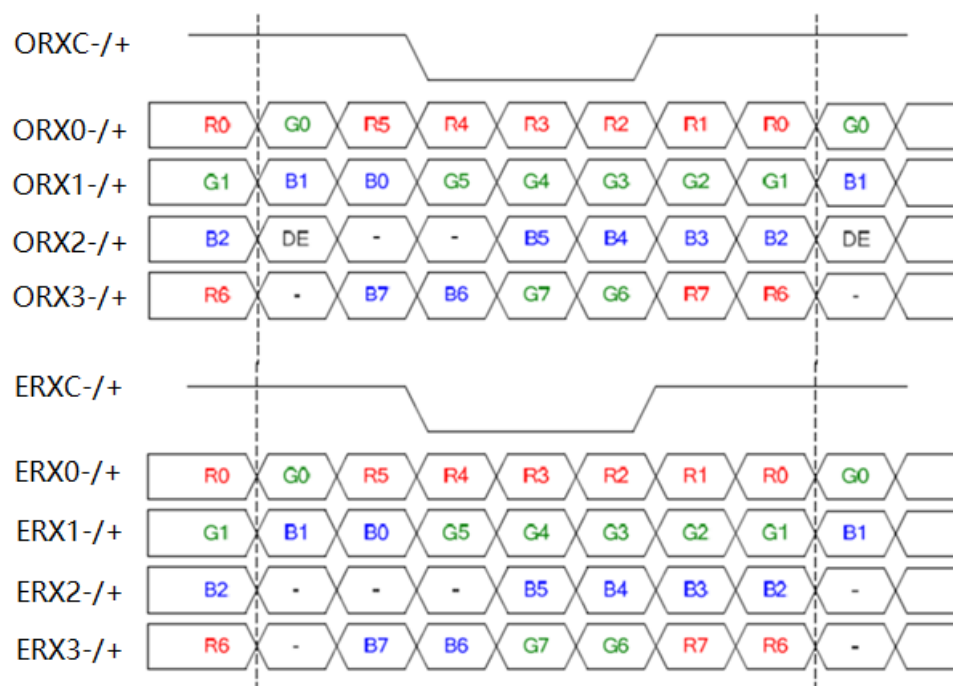


Table 6.2.1 LVDS data mapping (VESA standard)

7. Optical Characteristics

Item		Symbol	Condition	Min	Typ	Max	Unit	Remark
View Angles		θT	CR≧10	78	88	--	degree	Note2,3
		θB		78	88	--		
		θL		78	88	--		
		θR		78	88	--		
Contrast Ratio		CR	θ=0°	1500	2000	--		Note 3
Response Time		T _{ON}	25℃	--	35	40	ms	Note 4
		T _{OFF}						
Chromaticity	White	x	Backlight is on	0.254	0.304	0.354		Note 1,5
		y		0.273	0.323	0.373		
	Red	x		0.591	0.641	0.691		Note 1,5
		y		0.293	0.343	0.393		
	Green	x		0.284	0.334	0.384		Note 1,5
		y		0.577	0.627	0.677		
	Blue	x		0.105	0.155	0.205		Note 1,5
		y		0.001	0.051	0.101		
Uniformity		U	-	70	75	--	%	Note 6
NTSC		-	-	67	72	--	%	Note 5
Luminance		L	-	300	350	--	cd/m ²	Note 7

Table 7.1 Optical Parameters

Test Conditions:

1. The ambient temperature is 25℃.
2. The test systems refer to Note1 and Note2.

Note1: Definition of optical measurement system.

The optical characteristics should be measured in dark room. After 5 Minutes operation, the optical characteristics are measured at the center point of the LCD screen.

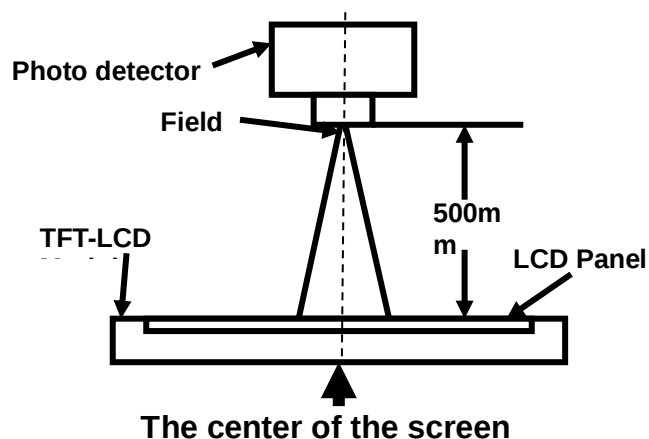


Fig1. Measurement Set Up

Note2: Definition of viewing angle range and measurement system. Viewing angle is measured at the center point of the LCD .

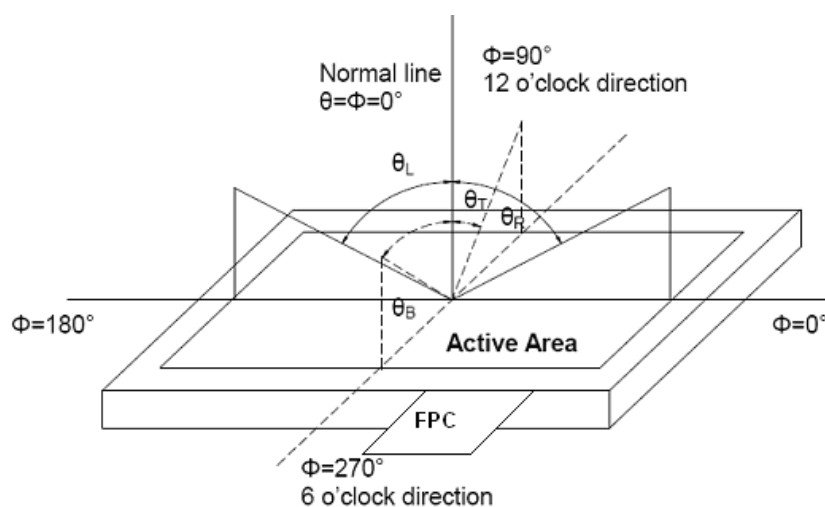


Fig2. Measurement viewing angle

Note3: Definition of contrast ratio

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD is on the "White" state}}{\text{Luminance measured when LCD is on the "Black" state}}$$

Note4: Definition of Response time

For SFT LCM, the response time is defined as the LCD optical switching time interval between "White" state and "Black" state. Rise time (T_r) is the time between photo detector output intensity changed from 10% to 90%. And fall time (T_f) is the time between photo detector output intensity changed from 90% to 10%.

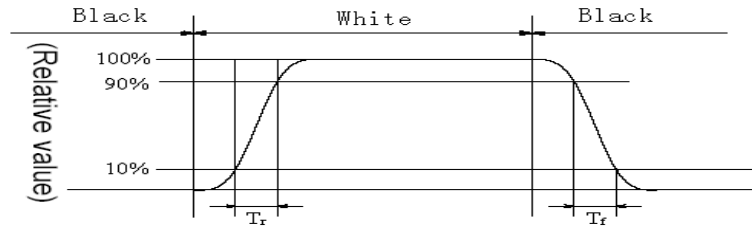


Fig3. Response Time Testing(SFT)

Note5: Definition of color chromaticity (CIE1931)

Color coordinates measured at center point of LCD.

Note6: Definition of Luminance Uniformity

Active area is divided into 9 measuring areas (Refer Fig.5). Every measuring point is placed at the center of each measuring area.

Luminance Uniformity (U) = L_{min} / L_{max}

L_{max} : The measured Maximum luminance of all measurement position.

L_{min} : The measured Minimum luminance of all measurement position.

L -----Active area length; W ----- Active area width

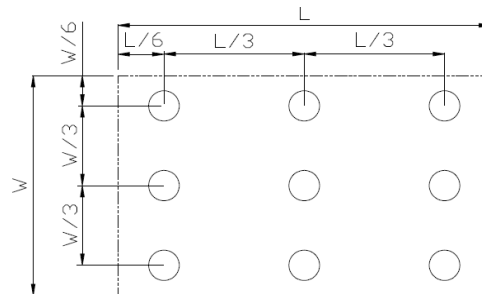


Fig4. Luminance Uniformity Measurement Locations(9 points)

Note7: Definition of Luminance:

Measure the luminance of white state at center point.

8. Reliability Test

No	Test Item	Condition	Remarks
1	High Temperature Operation	+60℃ , 240H	IEC60068-2-1:2007 GB2423.2-2008
2	Low Temperature Operation	-10℃ , 240H	IEC60068-2-1:2007 GB2423.1-2008
3	High Temperature Storage	+70℃ , 240H	IEC60068-2-1:2007 GB2423.2-2008
4	Low Temperature Storage	-20℃ , 240H	IEC60068-2-1:2007 GB2423.1-2008
5	Storage at High Temperature and Humidity(non-operation)	+50℃ , 80%RH , 240H	IEC60068-2-78 :2001 GB/T2423.3—2006
6	Thermal Shock (non-operation)	-20℃ , 30min~70℃ , 30min , change time : 5min , 100cycle	Start with cold temperature, End with high temperature, IEC60068-2-14:1984,GB2423.22-2002
7	ESD	C=150pF , R=330Ω , 5point/panel Air : ±8kv , 5times ; Contact : ±4kv , 5times ; (Environment : 15℃~35℃ , 30%~60% , 86Kpa~106Kpa)	IEC61000-4-2:2001 GB/T17626.2-2006
8	Package Vibration	5-20-200HZ , PSD : 0.01-0.01-0.001 Total:0.781g ² /HZ,x/y/z 30min)	
9	Package Drop Test	Height: X cm,1 corner, 3edges, 6 surfaces Note : X > 10Kg:60cm ; ≤10Kg:80cm	IEC60068-2-32:1990 GB/T2423.8—1995


Table 8.1 RA test condition

Note1: Temperature is the ambient temperature of sample

Note2: Before cosmetic and function test, the product must have enough recovery time, at least 2 hours at room temperature.

Note3: In the standard condition, there shall be no practical problem that may affect the display function. After the reliability test, the product's function only be guaranteed, but not for all of the cosmetic specification.


9. Mechanical Drawing

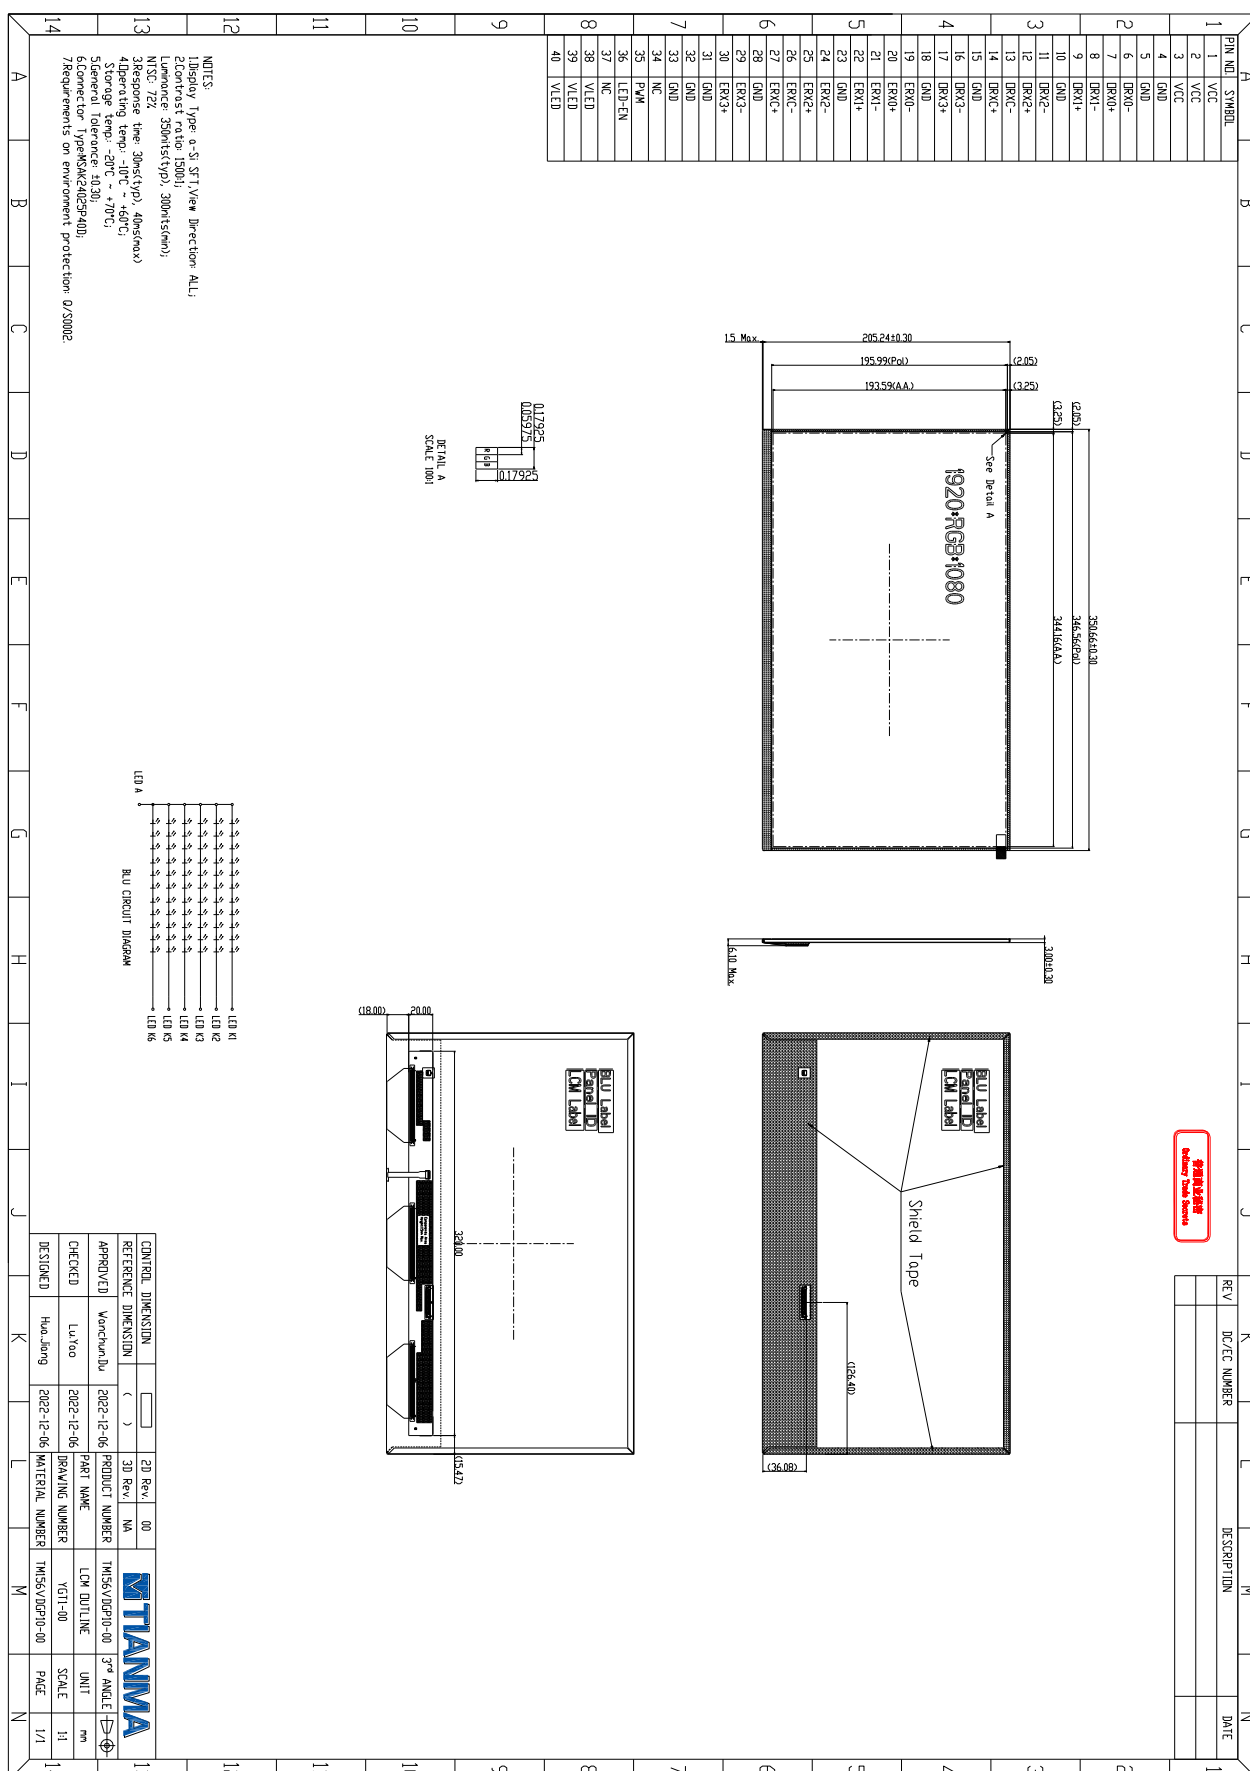

10. Packing Instruction

No	Item	Model (Material)	Dimension(mm)	Unit Weight(Kg)	Q'ty	Remark
1	LCM module	P1560FHF2MB00	350.66*205.24*3.0	0.346	13	
2	Carton	Corrugated paper	544×365×250	1.01	1	
3	Dust Proof Bag	PE	700×545	0.046	1	
4	Tray	PET	485×330×20.5	0.255	14	
5	EPE1	EPE	527×348×19	0.069	2	
6	EPE2	EPE	527×185×9	0.017	2	
7	EPE3	EPE	330×185×21	0.025	2	
8	LABEL	PAPER	100.0×52.0	0.001	1	
9	Total weight	9.35Kg ± 5%				

Table 10.1 Packing Instruction

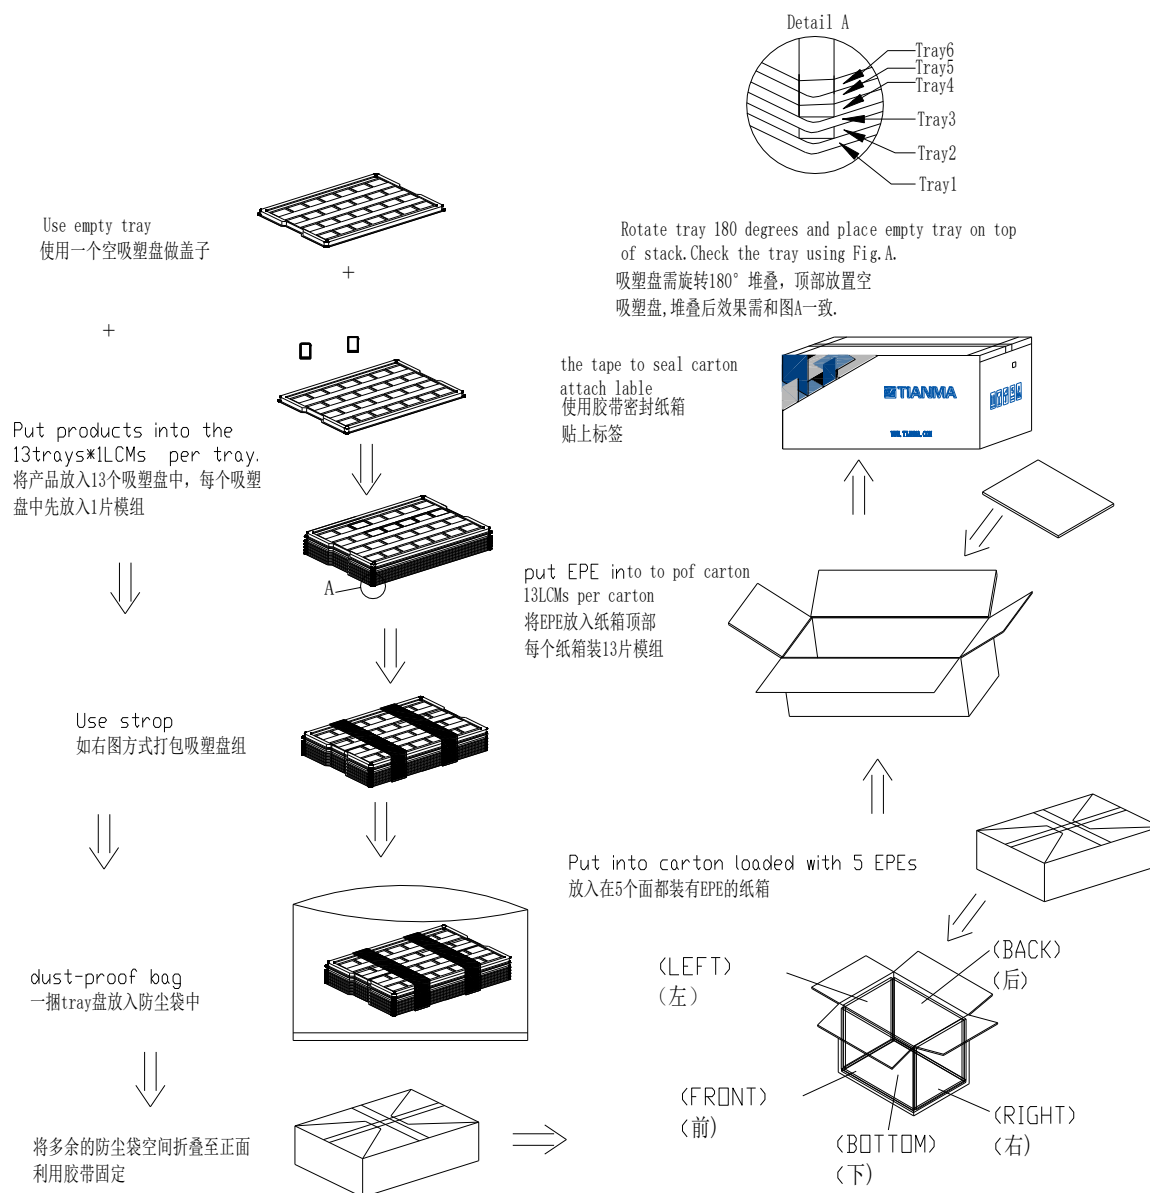

11. Precautions for Use of LCD Modules

11.1 Handling Precautions

- (1) The display panel is made of glass. Do not subject it to mechanical shock by dropping it, etc.
- (2) If the display panel is damaged and the liquid crystal fluid inside it leaks out be sure not to get any in your mouth. If the fluid comes into contact with your skin or clothes promptly wash it off using soap and water.
- (3) Do not apply excessive force to the display surface or the bezel since this may cause the color tone to vary.
- (4) The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle the polarizer carefully.
- (5) If the display surface is contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If it is still not completely clear use a moist cloth with one of the following solvents:
 - Isopropyl alcohol
 - Ethyl alcohol
 Solvents other than those mentioned above may damage the polarizer. Specifically, do not use the following:
 - Water
 - Ketone
 - Aromatic solvents
- (6) Do not disassemble the LCD Module.
- (7) If powered off, do not apply the input signals.
- (8) To prevent destruction of the module by static electricity, be careful to maintain an optimum work environment.
- (9) Be sure to ground your body when handling the LCD Modules.
- (10) Tools used for assembly, must be properly grounded.
- (11) To reduce the amount of static electricity generated, do not conduct assembly or other work under very low humidity conditions.
- (12) The LCD Module is covered with a film to protect the display surface, remove film slowly under the ionizer.

11.2 Storage precautions

- (1) When storing the LCD modules avoid exposure to direct sunlight or to the light of fluorescent lamps.
- (2) The LCD modules should be stored within the rated storage temperature range. The recommend condition is:
Temperature: 0 ~ 35 °C at normal humidity.
- (3) The LCD modules should be stored in a room without acid, alkali or other harmful gas.

11.3 Transportation Precautions

The LCD modules should not be dropped or subject to violent mechanical shock during transportation. Also they should avoid excessive pressure, water, high humidity and direct sunlight.

11.4 Screen saver Precautions

Not display the fixed pattern for a long time. Use a screen saver, if the fixed pattern is displayed on the screen

11.5 Safety Precautions

- (1) When you waste damaged or unnecessary LCDs, it is recommended to crush LCDs into pieces and wash them off with solvents such as acetone and ethanol, which should later be burned
- (2) Be sure to turn off the power supply when inserting or disconnecting the LED backlight cable.

(3) LED driver should be designed to limit or stop its function when over current is detected on the LED.