

SPECIFICATION

PRODUCT NO. : TCXD011IBLON-3
VERSION : Ver 1.7
ISSUED DATE : 2022-12-07

This module uses ROHS material

FOR CUSTOMER: _____

☐: APPROVAL FOR SPECIFICATION

☒: APPROVAL FOR SAMPLE

DATE	APPROVED BY

Xinli Optoelectronics :

Presented by	Reviewed by	Organized by
		

Note:


- 1.Xinli Optoelectronics reserves the right to make changes without further notice to any products herein to improve reliability, function or design.
- 2.All rights are reserved. No one is permitted to reproduce or duplicate the whole or part of this document without Xinli Optoelectronics' permission.

[illegible]


2. General Description and Features

The 1.1 inch Module named TCXD011IBLON-3 is a-Si TFT-LCD module, which is the type of transmissive. It is consisted of TFT-LCD Panel, Driver IC, FPC and Back-Light unit. Features of this product are listed in the following table.


NO	Item	Contents	Unit
(1)	Module Outsize	24.07*28.46*2.05	mm
(2)	LCD Active area	19.87*19.87	mm
(3)	Dot Number	96*3(RGB)*96	/
(4)	Pixel size	0.207*0.207	mm
(5)	LCD type	TFT Transmissive	/
(6)	Display Color	262K	/
(7)	Viewing direction	Free	O'clock
(8)	Backlight Type	1-chip LED	/
(9)	Power Supply	2.8 (TYP)	V
(10)	LCD Panel	SDI11001E5087(Laibao)	/
(11)	IC	ST7735SV (Sitronix)	/
(12)	Interface	FPC 0.3mm_Pitch 11 pin	/
(13)	Interface type	SPI interface	/
(14)	Module weight	Approx.2	g

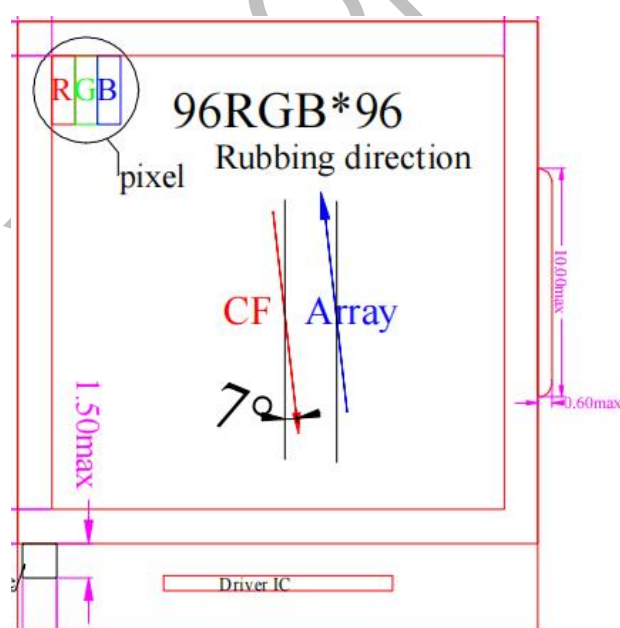



Pixel Scale 50:1



3. Mechanical Dimension

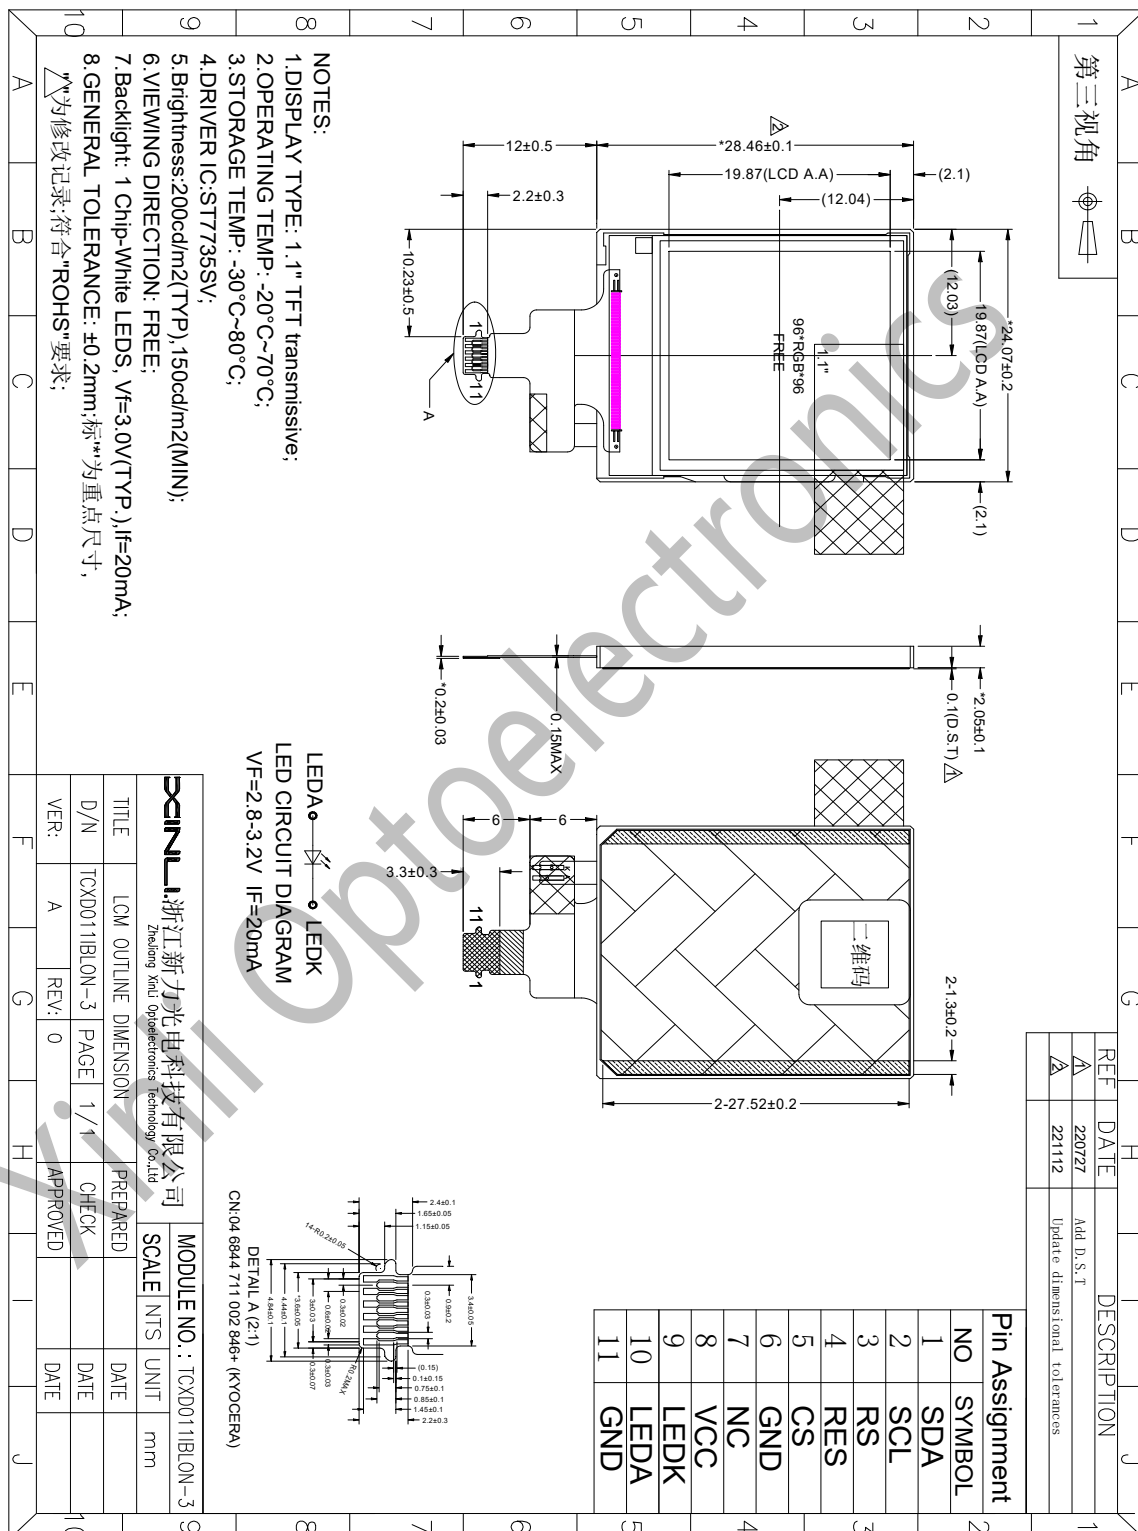

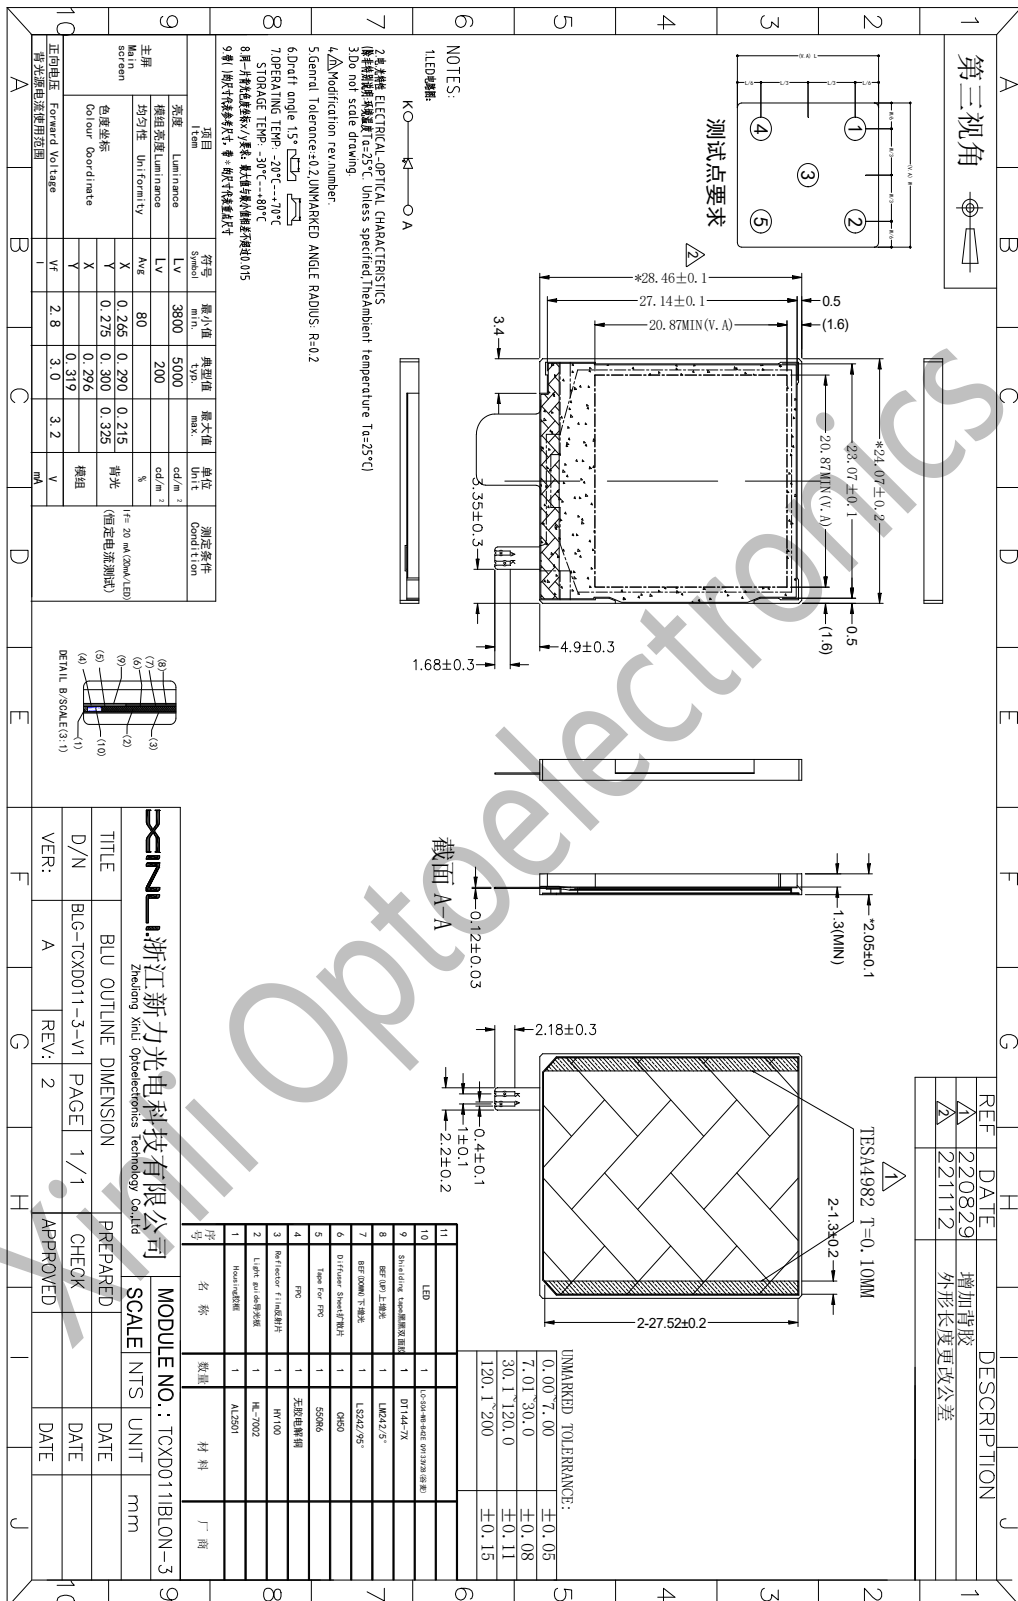

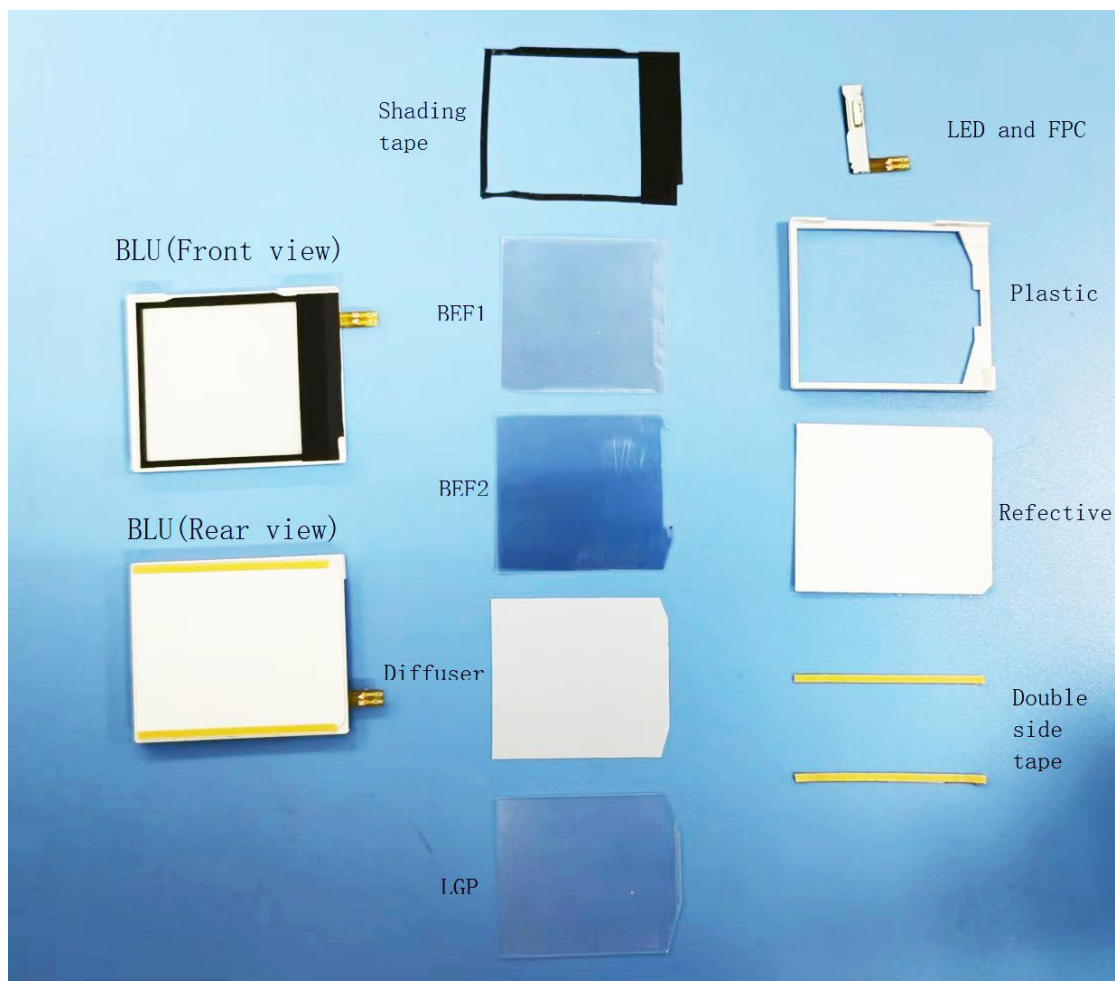


4. Interface Pin Connection

LCM interface Pin

NO	Symbol	Level	Description
1	SDA	I	SPI interface input/output pin. -The data is latched on the rising edge of the SCL signal.
2	SCL	I	This pin is used to be serial interface clock.
3	RS	I	4-line system (D/CX): Serves as command or parameter select.
4	RES	I	This signal will reset the device and it must be applied to properly initialize the chip.
5	CS	I	Chip select signal input (low active)
6	GND	p	Ground
7	NC	-	Not Connect
8	VCC	P	Power supply(2.8V)
9	LEDK	P	Back light power supply negative
10	LEDA	P	Back light power supply positive
11	GND	p	Ground

5. Block Diagram

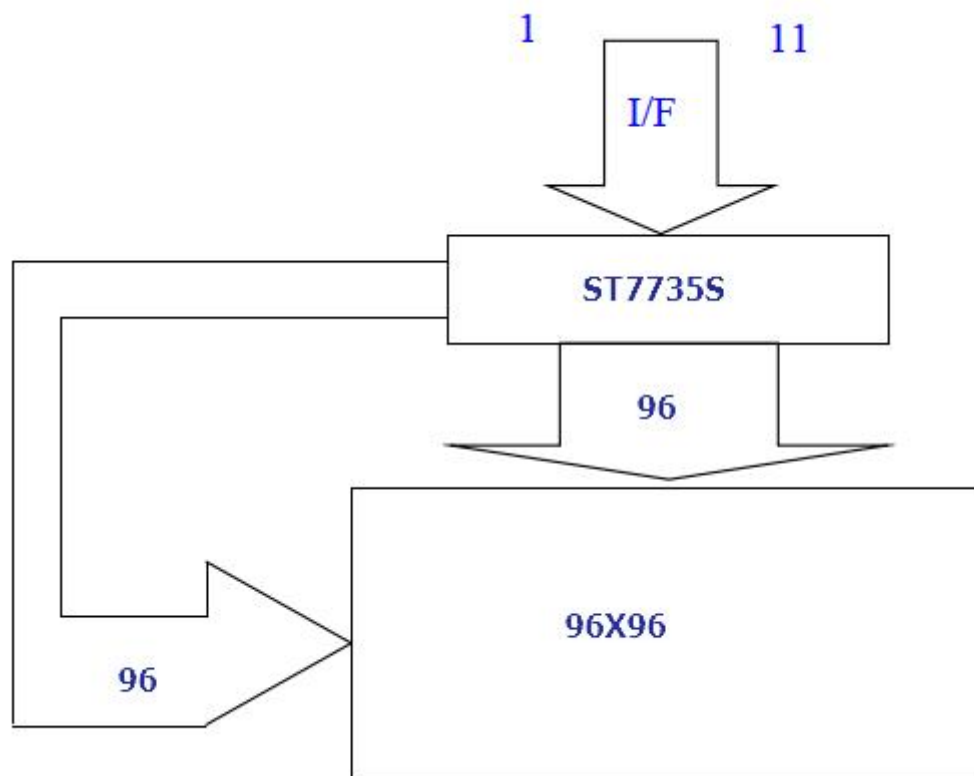

6. Maximum Rating

Item	Symbol	Rating	Unit
Operating temperature	Top	-20 to 70	°C
Storage temperature	Tst	-30 to 80	°C
Humidity	RH	90%(Max60°C)	RH
Supply power	VCC	-0.3 ~ 4.6	V
Supply Voltage (Logic)	VDDI	-0.3 ~ 4.6	V

7. Electrical Characteristics

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
System Voltage	VCC	-	2.5	2.8	3.7	V
Interface Operation Voltage	VDDI	-	1.65	1.8	3.7	V
Logic-High Input Voltage	VIH	-	0.7VDDI	-	VDDI	V
Logic-Low Input Voltage	VIL	-	VSS	-	0.3VDDI	V
Logic-High Output Voltage	VOH	-	0.8VDDI	-	VDDI	V
Logic-Low Output Voltage	VOL	-	VSS	-	0.2VDDI	V
Input Current	IDD	-	-	2.9	5	mA
Standby Current	IDD	-	-	0.045	0.06	mA

8. Backlight Characteristics

Item	syb	Min	Typ	Max	Unit	Condition
Voltage	Vf	2.8	3.0	3.2	V	IF=20mA
Luminance	Lv	150	200	-	cd/m2	
Number of LED	-	1			pcs	-
Operating Life Time	-	-	20000	-	Hrs	
LED TYPE	LC-S04-WB-B42E-Q9133V28(谷麦)					

Note 1: The LED Supply voltage is defined by the number of LED at Ta=25°C.

Note 2: Operating life means brightness goes down to 50% initial brightness. Typical operating life time is estimated data.

Note3:LED Bin limits

Luminance Bin Code (If=20mA)

BIN Code	Min	Max
I33	3300	3400


VF Bin Code (If=20mA)

BIN Code	Min	Max
V28	2.8	3.2

Color Bin Code (If=20mA)

Color No.	X1	Y1	X2	Y2	X3	Y3	X4	Y4
Q9	0.2945	0.2843	0.2875	0.2883	0.2807	0.2763	0.2877	0.2723

色度坐标图 Color map(If=20mA)

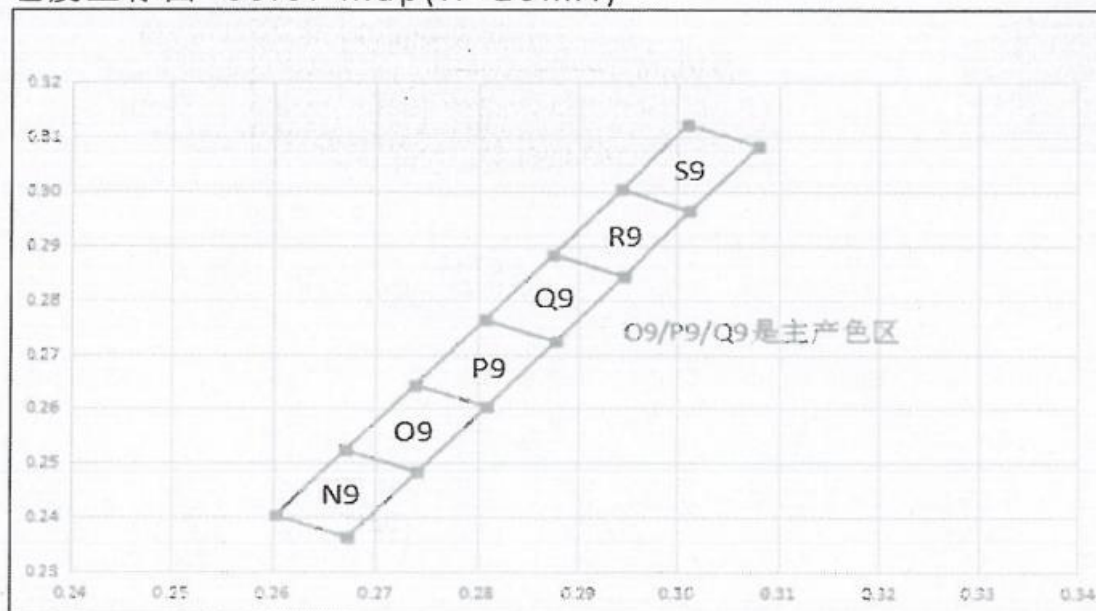

9. Timing Characteristics

Please consult our technical department for detail information.

10. Application Circuit

Please consult our technical department for detail information.

11. Initial Code

Please consult our technical department for detail information.


12. Electro-Optical Characteristics

Item		Symbol	Condition	Min	Typ	Max	Unit	Note
Response time		Tr+Tf	$\theta=0^{\circ}$ $\phi=0^{\circ}$ Ta=25℃	-	35	50	ms	4
Uniformity (Five point)		δ WHITE		-	75	-	%	7
Contrast ratio		Cr		400	500	-	-	3,5
Surface Luminance		Lv		150	200	-	cd/m ²	3,7
Viewing angle range		θ	$\phi=90^{\circ}$	60	80	-	deg	6
			$\phi=270^{\circ}$	60	80	-	deg	
			$\phi=0^{\circ}$	60	80	-	deg	
			$\phi=180^{\circ}$	60	80	-	deg	
Color filter chromaticity (x, y)	White	X	$\theta=\phi=0^{\circ}$	0.256	0.296	0.336		7
		Y		0.279	0.319	0.359		
	Red	X		0.590	0.630	0.670		
		Y		0.302	0.342	0.382		
	Green	X		0.305	0.345	0.385		
		Y		0.577	0.617	0.657		
	Blue	X		0.110	0.150	0.190		
		Y		0.040	0.080	0.120		

Note 1: Ambient temperature= $25^\circ\text{C} \pm 2^\circ\text{C}$

Note 2: To be measured in the dark room with backlight unit.


Note 3: To be measured at the center area of panel with a viewing cone of 1 by Topcon luminance meter BM-7A, after 10 minutes operation (module).

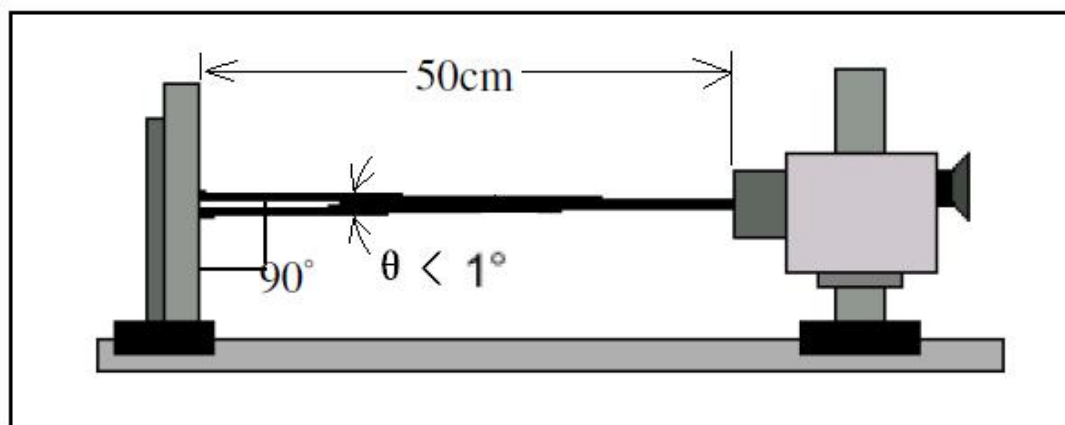

Note 4: Definition of response time:

The output signals of photo detector are measured when the input signals are changed from “white” to “black” (rising time) and from “black” to “white” (falling time), respectively. The response time is defined as the time interval between the 10% and 90% of amplitudes.

Refer to figure as below.

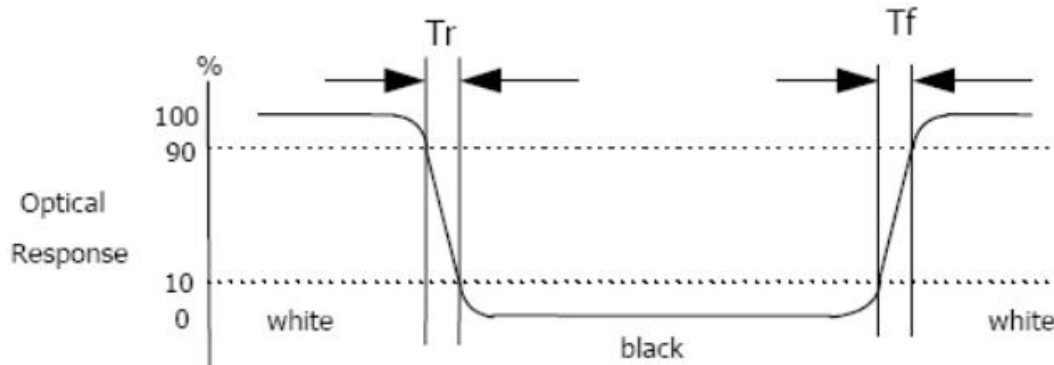
**Note 5. Definition of contrast ratio:**

Contrast ratio is calculated with the following formula:

$$\text{Contrast ratio (CR)} = \frac{\text{Photo detector output when LCD is at "White" state}}{\text{Photo detector output when LCD is at "Black" state}}$$


Note 6. Definition of viewing angle

Viewing angle is the angle at which the contrast ratio is greater than 10 for TFT module. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface.

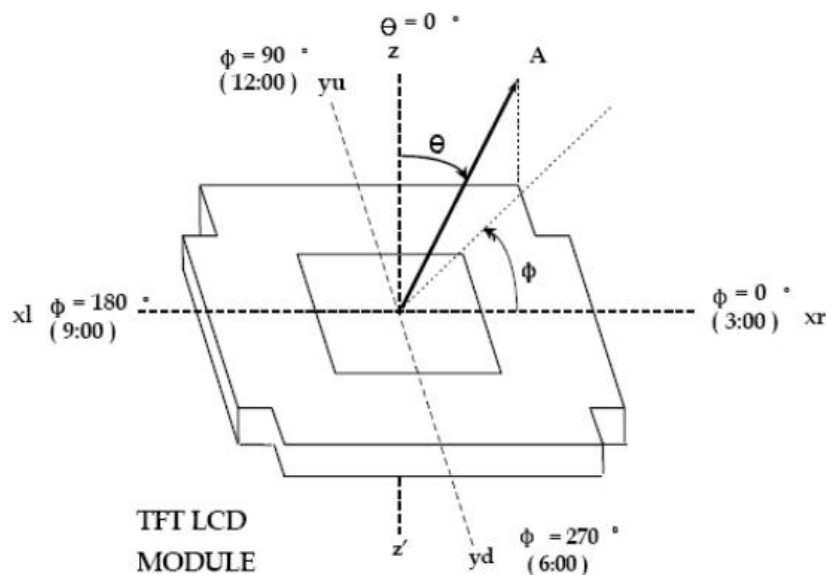

Note 7. Surface luminance is the LCD surface from the surface with all pixels displaying white. Refer to figure as below.

Measuring method for Contrast ratio, surface luminance, Luminance uniformity, CIE (x, y) chromaticity

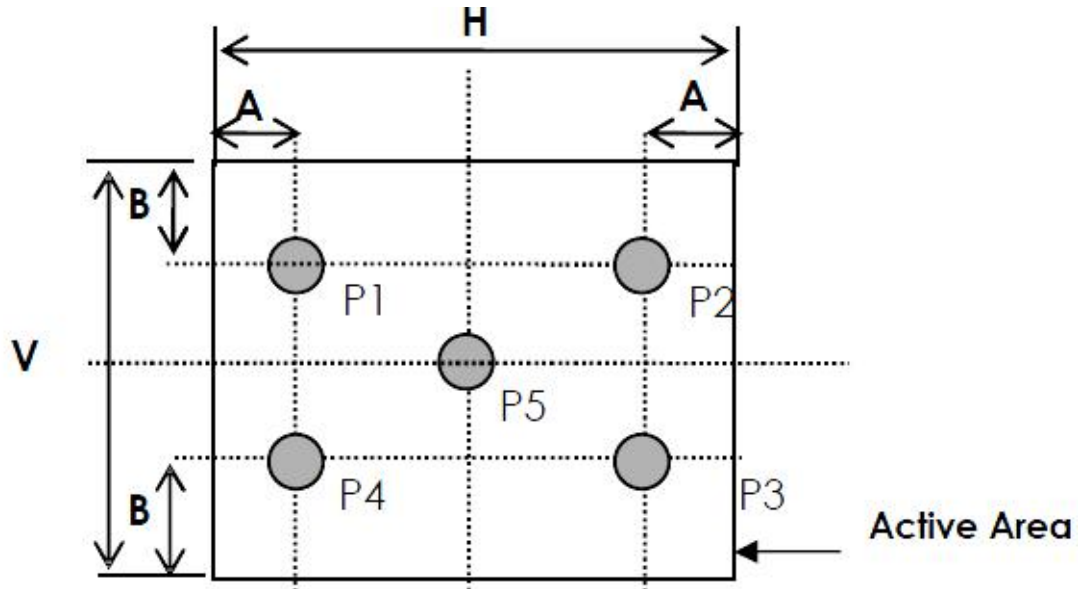

A : 5 mm B : 5 mm H,V : Active Area

Light spot size $\varnothing=7\text{mm}$, 500mm distance from the LCD surface to detector lens
measurement instrument is TOPCON's luminance meter BM-7A

Uniformity definition= [min of 5point/max of 5points]x100%

L_v = Surface Luminance with all white pixels (P_5)

13. Quality Assurance

The customer should check and accept the products of XINLI within one month after reception. This standard for Quality Assurance should affirm the quality of LCD products to supply to purchaser by XINLI Company Limited.

1. Scope

Display Quality Evaluation

Mechanics Specification

2. Sampling Plan

MIL-STD-105E

Unless there is other agreement, the sampling plan for incoming inspection shall follow MIL-STD-105E.

Lot size: Quantity per shipment as one lot (different model as different lot).

Sampling type: Normal inspection, single sampling.

Sampling level: Level II.

3. Acceptable Quality Level

Major defect: AQL=0.65

Minor defect: AQL=1.0

Classification of defects:

(1) Major defect: Any defect may result in functional failure, or reduce the usability of product for its purpose. For example: Electrical failure, deformation and etc.

(2) Minor defect: The criteria on major or minor judgment will be according with the classification of defects.

4. Panel Inspection Condition

(1) The environmental conditions for inspection shall be as follows:


Room temperature: $23 \pm 3^{\circ}\text{C}$

Humidity: $55 \pm 10\% \text{RH}$

(2) Ambient illumination condition need 750lux for visual cosmetic inspection (300lux for Electrical characteristic functional inspection.)

(3) The distance from eyes to LCD must be $30 \pm 5\text{cm}$.

(4) Viewing direction must be within 45 degrees to vertical line of LCD center.

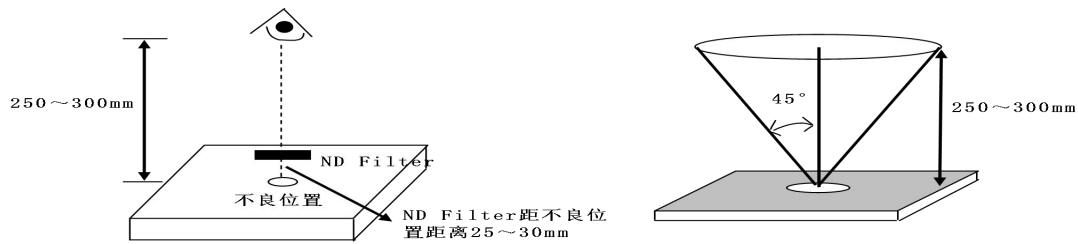


5. Major defect

No.	Item	Inspection Standard	Classification of defects
1	All functional defects	1) No display 2) Display abnormally 3) Open or missing segment 4) Short circuit 5) Excess power consumption 6) Backlight no lighting, flickering and abnormal lighting	Major
2	Missing	Missing component	Major
3	Outline dimension	Overall outline dimension beyond the drawing is not allowed	Major



6. Cosmetic defect in the Active Area

No.	Item	Inspection Standard	Classification of defects
1	(spot defect) Bright Dot/ Dark Dot/ Foreign Material/ Spot/Dent /Bubble On the polarizer	$D = (a + b) / 2$	Minor
		Size Φ (mm)	
		Acceptable Quantity	
		$\Phi \leq 0.15$	
		$0.15 < \Phi \leq 0.25$	
		$0.25 < \Phi$	0


2	(line defect) Foreign Material /Scratch /Bubble On the polarizer			Minor
		Width	Length(mm);Acceptable Qty	
		$W \leq 0.03$	Ignore	
		$0.03 < W \leq 0.05$	$L \leq 3.0$; $N \leq 2$	
		$0.05 < W \leq 0.07$	$L \leq 2.0$; $N \leq 1$	
		$0.07 < W$	Define as spot defect	
3	Mura	Follow Limit sample if necessary by 5%ND filter		Minor

※Note1) D = Diameter, L = Length, W = Width, N = Number

$$D = (a + b) / 2$$




※Note2) For pixel defect, dot means a sub-pixel. Dot defects should be larger than half size of a Sub -pixel. Dot which is invisible through 5% ND filter or smaller than 1/2 of sub-pixel size will not counted as "1 dot" defect.

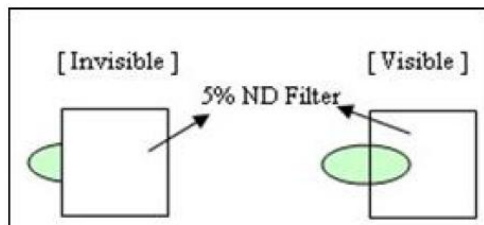

"No dot defect"
(=ignored)

"1 dot defect"
(=counted)

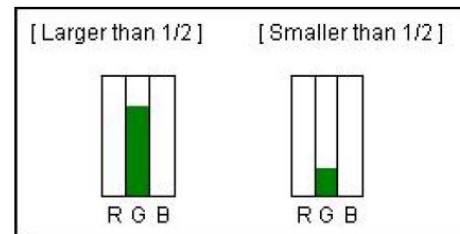

"1 dot defect"
(=counted)

"No dot defect"
(=ignored)

14. Reliability Test

This standard reliability test is done only for the first lot of **MP** products. Customer and supplier must hold a discussion if other reliability test is requested by customer.

NO.	Test Item	Description	Test Condition
1	High temperature storage	Endurance test applying the high storage temperature for a long time	80℃,96 H
2	Low temperature storage	Endurance test applying the low storage temperature for a long time	-30℃,96H
3	High temperature operation	Endurance test applying the electric stress under high temperature for a long time	70℃,96H
4	Low temperature operation	Endurance test applying the electric stress under low temperature for a long time	-20℃,96H
5	High temperature /humidity storage	Endurance test applying the high temperature and high humidity storage for a long time	60℃,90% RH, 96H

15. Precautions for Operation and Storage

1. Precautions for Operation

- (1) Since LCD panel made of glass, in order to prevent from glass broken or color tone change, please do not apply any mechanical shock or impact or excessive force to it when installing the LCD module.
- (2) If LCD panel is broken and liquid crystal substance leaks out and contact your skin or clothes, please immediately wash it off by using soap and water.
- (3) The polarizer on the LCD surface is soft and easily scratched. Please be careful when handling.
- (4) If LCD surface becomes contaminated, please wipe it off gently by using moisten soft cloth with normal hexane, do not use acetone, ketone, ethanol, alcohol or water. If there is saliva or water on the LCD surface, please wipe it off immediately.
- (5) When handling LCD module, please be sure that the body and the tools are properly grounded. And do not touch I/F pins with bare hands or contaminate I/F pins.

- (6) Do not attempt to disassemble or process the LCD module.
- (7) LCD module should be used under recommended operating conditions shown in chapter 6 and 7.
- (8) Response time will be extremely slower at lower temperature than at specified temperature and LCD will show different color when at higher temperature. The phenomenon will disappear when returning to specified condition.
- (9) Foggy dew, moisture condensation or water droplets deposited on surface and contact terminals will cause polarizer stain or damage, the deteriorated display quality and electrochemical reaction then leads to the shorter life time and permanent damage to the module probably. Please pay attention to the environmental temperature and humidity.




2. Precautions for Storage

- (1) Please store LCD module in a dark place, avoid exposure to sunlight, the light of fluorescent lamp or any ultraviolet ray.
- (2) Keep the environment temperature at between 10°C and 35 °C and at normal humidity. Avoid high temperature, high humidity or temperature below 0°C.
- (3) That keeps the LCD modules stored in the container shipped from supplier before using them is recommended.
- (4) Do not leave any article on the LCD module surface for an extended period of time.

3. Warranty period

Warrants for a period of 12 Months from the shipping date when stored or used under normal condition.

16.Package Specification

	A	B	C	D	E	F	G	H	I	J																	
1	注意：模组正面朝上 							<table border="1"><thead><tr><th>MARK</th><th>REV.</th><th>CHANGE CONTENT</th><th>BY</th><th>STATE</th><th>DATE</th></tr></thead><tbody><tr><td></td><td>V0</td><td></td><td></td><td></td><td></td></tr></tbody></table>		MARK	REV.	CHANGE CONTENT	BY	STATE	DATE		V0										
MARK	REV.	CHANGE CONTENT	BY	STATE	DATE																						
	V0																										
2	每大箱装四小箱 																										
3	内箱标签填写如下内容 (红色标记按实际情况填写) <table border="1"><thead><tr><th colspan="2">浙江新力光电科技有限公司 ZHEJIANG XINLI OPTOELECTRONICS TECHNOLOGY CO., LTD</th></tr></thead><tbody><tr><td>液晶显示模组</td><td>TFT LCM</td></tr><tr><td>产品类型/TYPE</td><td>TCXD011BL0N-3</td></tr><tr><td>数量/QUANTITY</td><td>630 PCS</td></tr><tr><td>批号/LOT NO.</td><td>P-LCM-XXXXXX</td></tr></tbody></table>							浙江新力光电科技有限公司 ZHEJIANG XINLI OPTOELECTRONICS TECHNOLOGY CO., LTD		液晶显示模组	TFT LCM	产品类型/TYPE	TCXD011BL0N-3	数量/QUANTITY	630 PCS	批号/LOT NO.	P-LCM-XXXXXX										
浙江新力光电科技有限公司 ZHEJIANG XINLI OPTOELECTRONICS TECHNOLOGY CO., LTD																											
液晶显示模组	TFT LCM																										
产品类型/TYPE	TCXD011BL0N-3																										
数量/QUANTITY	630 PCS																										
批号/LOT NO.	P-LCM-XXXXXX																										
4	珍珠棉 共15个托盘 (含顶端一空托盘) ↓ 珍珠棉 14盘产品外加一个空托盘上下交错(80度)放好，上下各垫7mm泡棉，每层中间放0.8mm珍珠棉。																										
5	珍珠棉 ↓ 在每个大箱如图所示位置贴好外箱标签，并填写相应产品信息																										
6	珍珠棉 ↓ 胶带 打包装 打包装 打包装							<table border="1"><thead><tr><th colspan="2">浙江新力光电科技有限公司 ZHEJIANG XINLI OPTOELECTRONICS TECHNOLOGY CO., LTD</th></tr></thead><tbody><tr><td>液晶显示模组</td><td>TFT LCM</td></tr><tr><td>产品型号/TYPE</td><td>TCXD011BL0N-3</td></tr><tr><td>数量/QUANTITY</td><td>2520 PCS</td></tr><tr><td>箱号/CONTAINER NO.</td><td>第 3 箱</td></tr><tr><td>批号/LOT NO.</td><td>P-LCM-XXXXXX</td></tr><tr><td>收货人/CONSIGNEE</td><td></td></tr><tr><td>原产地</td><td>中国</td></tr><tr><td>检验/INSPECTION</td><td></td></tr></tbody></table>		浙江新力光电科技有限公司 ZHEJIANG XINLI OPTOELECTRONICS TECHNOLOGY CO., LTD		液晶显示模组	TFT LCM	产品型号/TYPE	TCXD011BL0N-3	数量/QUANTITY	2520 PCS	箱号/CONTAINER NO.	第 3 箱	批号/LOT NO.	P-LCM-XXXXXX	收货人/CONSIGNEE		原产地	中国	检验/INSPECTION	
浙江新力光电科技有限公司 ZHEJIANG XINLI OPTOELECTRONICS TECHNOLOGY CO., LTD																											
液晶显示模组	TFT LCM																										
产品型号/TYPE	TCXD011BL0N-3																										
数量/QUANTITY	2520 PCS																										
箱号/CONTAINER NO.	第 3 箱																										
批号/LOT NO.	P-LCM-XXXXXX																										
收货人/CONSIGNEE																											
原产地	中国																										
检验/INSPECTION																											
7	珍珠棉 ↓ 用胶带包扎好，并套好防静电袋密封。放到内包装箱内，上下垫上泡棉，并用胶带封好箱口。																										
8	胶带 ↓ 用胶带及打包带封好外箱																										
9	说明：1. 每小箱630pcs产品，14+1层托盘； 2. 每大箱装4小箱，2520pcs产品； 3. 非中性包装；																										
10	在如图所示的位置贴上内箱标签，并填写相应的产品信息 							<table border="1"><thead><tr><th colspan="2">浙江新力光电科技有限公司 ZHEJIANG XINLI OPTOELECTRONICS TECHNOLOGY CO., LTD</th></tr></thead><tbody><tr><td>DRAWING TITLE</td><td>PACKAGE</td></tr><tr><td>DRAWING NO.</td><td>TRPG-TCXD011-3-V0</td></tr><tr><td>FILE NO.</td><td>0</td></tr><tr><td>CHECKED</td><td></td></tr><tr><td>APPROVED</td><td></td></tr></tbody></table> SCALE: -- UNIT: MM PROJECTION:  SHEET: 1/1		浙江新力光电科技有限公司 ZHEJIANG XINLI OPTOELECTRONICS TECHNOLOGY CO., LTD		DRAWING TITLE	PACKAGE	DRAWING NO.	TRPG-TCXD011-3-V0	FILE NO.	0	CHECKED		APPROVED							
浙江新力光电科技有限公司 ZHEJIANG XINLI OPTOELECTRONICS TECHNOLOGY CO., LTD																											
DRAWING TITLE	PACKAGE																										
DRAWING NO.	TRPG-TCXD011-3-V0																										
FILE NO.	0																										
CHECKED																											
APPROVED																											