



晶采光電科技股份有限公司  
**AMPIRE CO., LTD.**

# Specifications for LCD module

<b>Customer</b>	
<b>Customer part no.</b>	
<b>Ampire part no.</b>	<b>AM-800480BTMQW-TBPH</b>
<b>Approved by</b>	
<b>Date</b>	

☒ Preliminary Specification

☐ Formal Specification

**AMPIRE CO., LTD.**

**4F., No.116, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei  
City221, Taiwan (R.O.C.)**

**新北市汐止區新台五路一段 116 號 4 樓(東方科學園區 A 棟)**

**TEL:886-2-26967269 , FAX:886-2-26967196 or 26967270**

Approved by	Checked by	Organized by
Kokai	Mark	Lawlite

\*This specification is subject to change without notice.

## RECORD OF REVISION

Revision Date	Page	Contents	Editor
2020/04/08	-	New release	Lawlite

## 1. Features


It's a 7 inches Amorphous-TFT-LCD (Thin Film Transistor Liquid Crystal Display) module. This module is composed of a 7" TFT-LCD panel, LED backlight, and touch panel.

- (1) Construction: 7" a-Si TFT active matrix, White LED Backlight.
- (2) Resolution (pixel): 800(R.G.B) X480
- (3) Number of the Colors : 262K colors ( R , G , B 6 bit digital each)
- (4) LCD type : Transmissive, normally White
- (5) Interface: TTL
- (6) Viewing Direction: 6 o'clock (Gray inversion)
- (7) Projective Capacitive Touch

- ✧ IC: EXC80W32
- ✧ Interface: USB
- ✧ Printing : Black border ( Pantone:Black)

## 2. PHYSICAL SPECIFICATIONS

Item	Specifications	unit
LCD size	7 inch (Diagonal)	
Resolution	800 x (RGB) x 480	dot
Pixel pitch	0.192(W) x 0.1805(H)	mm
Active area	153.6(W) x 86.64(H)	mm
Color arrangement	RGB-stripe	

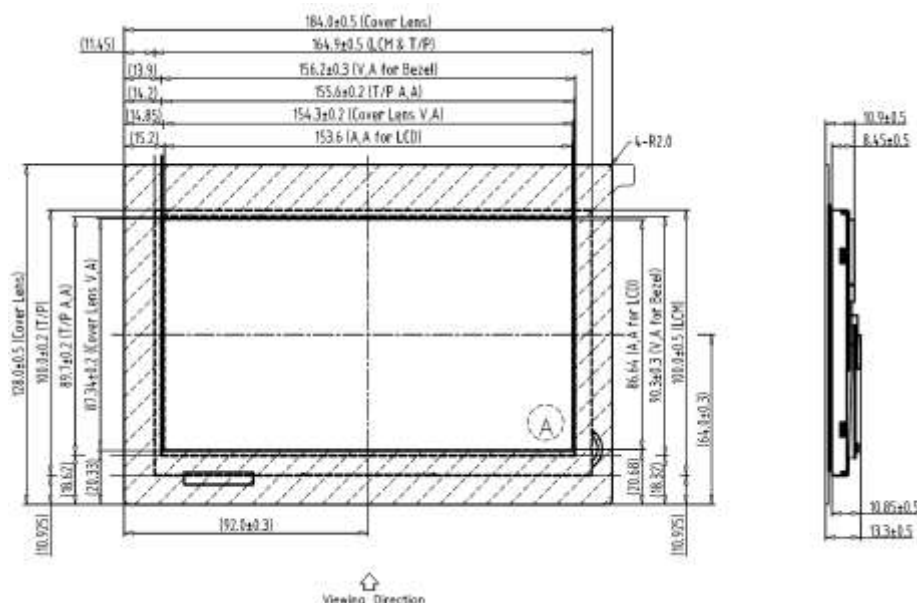

### 3. ABSOLUTE MAX. RATINGS

Item	Symbol	Values			Unit	Remark
		MIN	TYP	MAX		
Power Voltage	VCC	-0.5	--	5	V	
LED Driver Power Voltage	VLED	-0.3	--	19	V	
Operation Temperature	TOP	-20	-	70	°C	
Storage Temperature	TST	-30	-	80	°C	


Note (1) The absolute maximum rating values of this product are not allowed to be exceeded at any times. Should a module be used with any of the absolute maximum ratings exceeded, the characteristics of the module may not be recovered, or in an extreme case, the module may be permanently destroyed.

## 4. Backlight Driving Conditions


ITEM	SYMBOL	MIN	TYP	MAX	UNIT	NOTE
LED Driver Power Voltage	VLED	--	12	19	V	
LED Driver Power Current	I <sub>LED</sub> (VLED=12V)	--	330	--	mA	Ta=25°C
PWM Dimming DC active level	VDIMH	1.5	--	6	V	
	VDIML	--	--	0.6	V	
PWM Dimming Freq.	FDIM	0.2		20	kHz	
BLEN Pin High Voltage	VBLENH	1.4		--	V	
BLEN Pin Low Voltage	VBLENL	--		0.8	V	
LED voltage	VAK	--	26.4	--	V	Note 1
LED current	I <sub>F</sub>	--	120	--	mA	Note 1
LED life time	--	--	50	--	kHrs	Note 2

Note (1) The LED Supply Voltage is defined by the number of LED at Ta=25°C and I<sub>F</sub>=120 mA.

Note (2) The “LED life time” is defined as the module brightness decrease to 50% original brightness at Ta=25°C and I<sub>F</sub>=120mA. The LED lifetime could be decreased if operating I<sub>F</sub> is larger than 120mA.

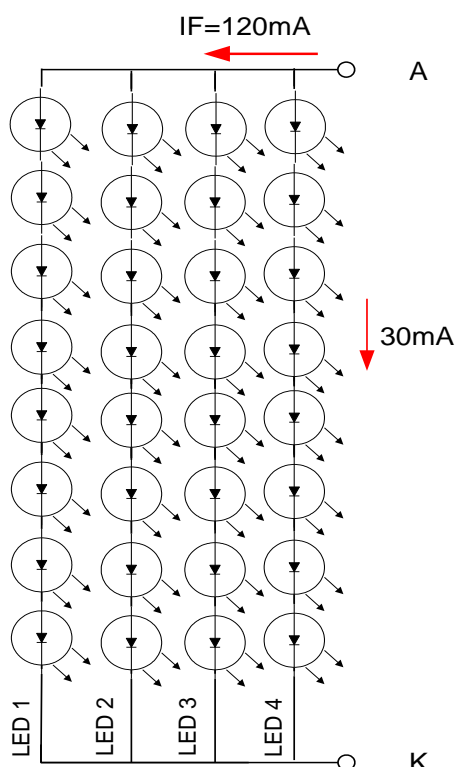

Note (3) When LCM is operated over 40°C ambient temperature, the IF should be follow :

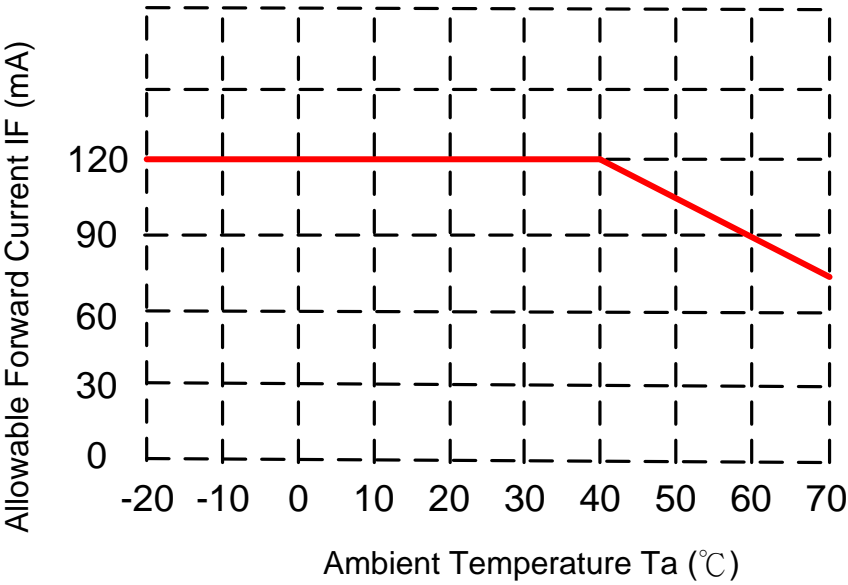

## 5. Optical Specifications


Item	Symbol	Condition	Values			Unit	Note
			Min.	Typ.	Max.		
Viewing angle (CR $\geq$ 10)	$\theta$ L	$\Phi = 180^\circ$ (9 o'clock)	60	70	--	degree	Note1
	$\theta$ R	$\Phi = 0^\circ$ (3 o'clock)	60	70	--		
	$\theta$ T	$\Phi = 90^\circ$ (12 o'clock)	40	50	--		
	$\theta$ B	$\Phi = 270^\circ$ (6 o'clock)	50	60	--		
Response time	TON	Normal $\theta = \Phi = 0^\circ$	--	5	7	msec	Note3
	TOFF		--	20	28	msec	
Contrast ratio	CR		400	500	--	--	Note4
Color chromaticity	WX		0.26	0.31	0.36	--	Note5 Note6
	WY		0.32	0.37	0.42	--	
	RX		0.57	0.62	0.67		
	RY		0.31	0.36	0.41		
	GX		0.30	0.35	0.40		
	GY		0.55	0.60	0.65		
	BX		0.06	0.11	0.16		
	BY		0.07	0.12	0.17		
Luminance (central point)	L		680	850	--	cd/m <sup>2</sup>	Note6
Luminance uniformity	YU		70	75	--	%	Note6

Test Conditions:

VCC = 3.3V, IF = 120mA (Backlight current), the ambient temperature is 25°C.


The test systems refer to Note 2.

Note (1) Definition of viewing angle range

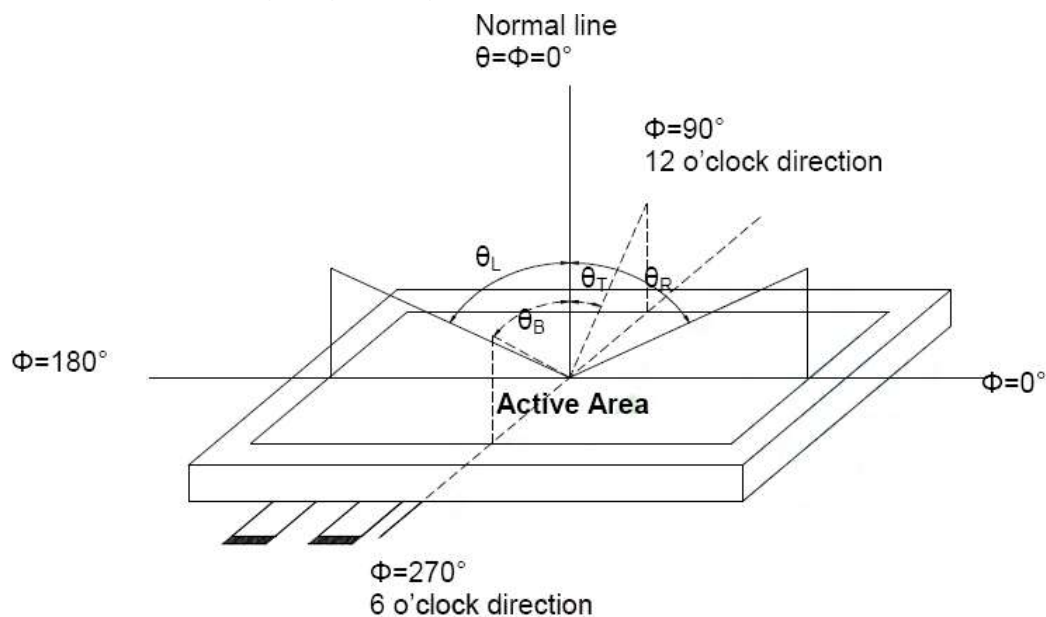

Note (2) Definition of optical measurement system


The optical characteristics should be measured in dark room. After 30 minutes operation, the optical properties are measured at the center point of the LCD screen. (Response time is measured by Photo detector TOPCON BM-7, other items are measured by BM-5A/Field of view:  $1^\circ$  / Height: 500mm.)

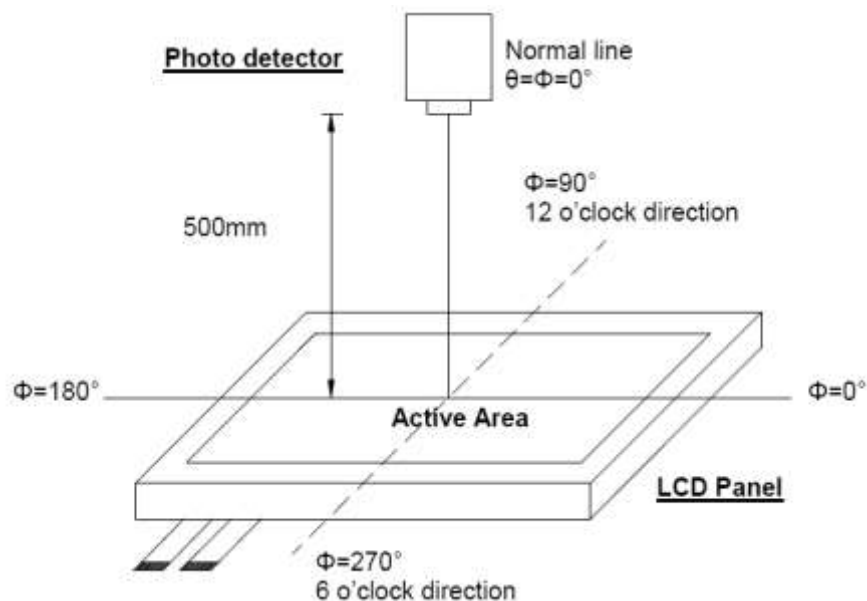



Note (3) Definition of Response time

The response time is defined as the LCD optical switching time interval between “White” state and “Black” state. Rise time (TON) is the time between photo detector output intensity changed from 90% to 10%. And fall time (TOFF) is the time between photo detector output intensity changed from 10% to 90%.

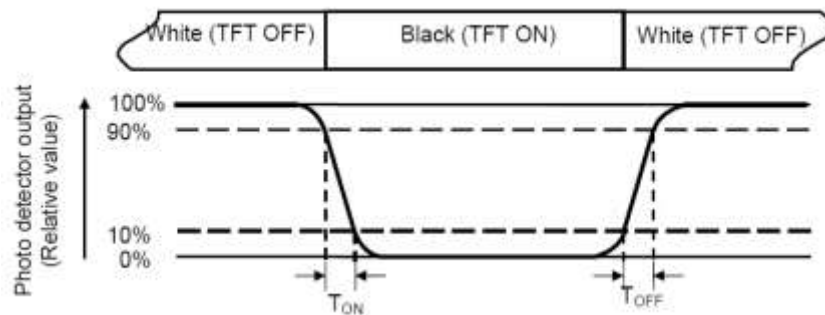

Note (4) Definition of contrast ratio

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$$

Note (5) Definition of color chromaticity (CIE1931)

Color coordinated measured at center point of LCD.

All input terminals LCD panel must be ground when measuring the center area of the panel.


Note (6) Definition of Luminance Uniformity

Active area is divided into 9 measuring areas (Refer to bellow figure).

Every measuring point is placed at the center of each measuring area.

$$\text{Luminance Uniformity (Yu)} = \frac{B_{\min}}{B_{\max}}$$

L ----- Active area length      W ----- Active area width

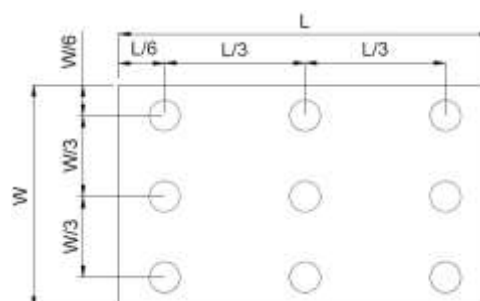

Bmax : The measured maximum luminance of all measurement position.

Bmin : The measured minimum luminance of all measurement position.

## 6. INTERFACE

Pin No.	Symbol	Function
1	LGND	LED Driver Ground
2	LGND	LED Driver Ground
3	ADJ	Adjust for LED Brightness
4	VLED	Power supply for LED
5	VLED	Power supply for LED
6	VLED	Power supply for LED
7	VCC	Power supply for LCD
8	VCC	Power supply for LCD
9	DE	Data Enable Timing Signal
10	GND	Ground
11	GND	Ground
12	GND	Ground
13	B5	Blue data (MSB)
14	B4	Blue data
15	B3	Blue data
16	GND	Ground
17	B2	Blue data
18	B1	Blue data
19	B0	Blue data (LSB)
20	GND	Ground
21	G5	Green data (MSB)
22	G4	Green data
23	G3	Green data
24	GND	Ground
25	G2	Green data
26	G1	Green data
27	G0	Green data (LSB)
28	GND	Ground
29	R5	Red data (MSB)
30	R4	Red data
31	R3	Red data
32	GND	Ground

33	R2	Red data
34	R1	Red data
35	R0	Red data (LSB)
36	GND	Ground
37	GND	Ground
38	DCLK	Data Clock
39	GND	Ground
40	GND	Ground

I: input, O: output, P: power

## 7. ELECTRICAL CHARACTERISTICS

### 7.1 DC Characteristics

Item		Symbol	Min.	Typ.	Max.	Unit	Remark
Power supply		VCC	3.0	3.3	3.6	V	
LED Driver Power Supply		VLED	--	12	19	--	
Input Voltage for logic	H Level	VIH	0.7 VCC	--	VCC	V	
	L Level	VIL	0	--	0.3 VCC	V	
Power Supply current		ICC		85		mA	Note1
LED Power Supply current VLED=12V		ILED	--	330	--	mA	Ta=25°C

Note (1) TFT power supply current. VCC=3.0V, fV =60Hz, Ta=25°C, Display pattern: All Black

### 7.2 AC Characteristics

#### TTL


##### ● Horizontal timing

Parameter	Symbol	Spec			Unit
		Min.	Typ.	Max.	
H-Display Area	thd		800		DCLK
DCLK Frequency	fclk	--	30	50	MHz
One Horization Period	th	862	1056	1200	DCLK
HS Pulse Width	thpw	1	--	40	DCLK
HS Back Porch ( Blanking)	thb		46		DCLK
HS Front Porch	thfp	16	210	354	DCLK
DE Mode Blanking	th-thd	85	256	400	DCLK


##### ● Vertical timing

Parameter	Symbol	Spec			Unit
		Min.	Typ.	MAX	
V-Display Area	tvd		480		th
VS period Time	Tv	513	525	650	th
VS pulse width	tvpw	3	--	20	th
VS Back Porch ( Blanking)	tvb		23		th
VS Front Porch	tvfp	7	22	147	th
DE Mode Blanking	tv-tvd	30	45	170	th

## Horizontal Input Timing

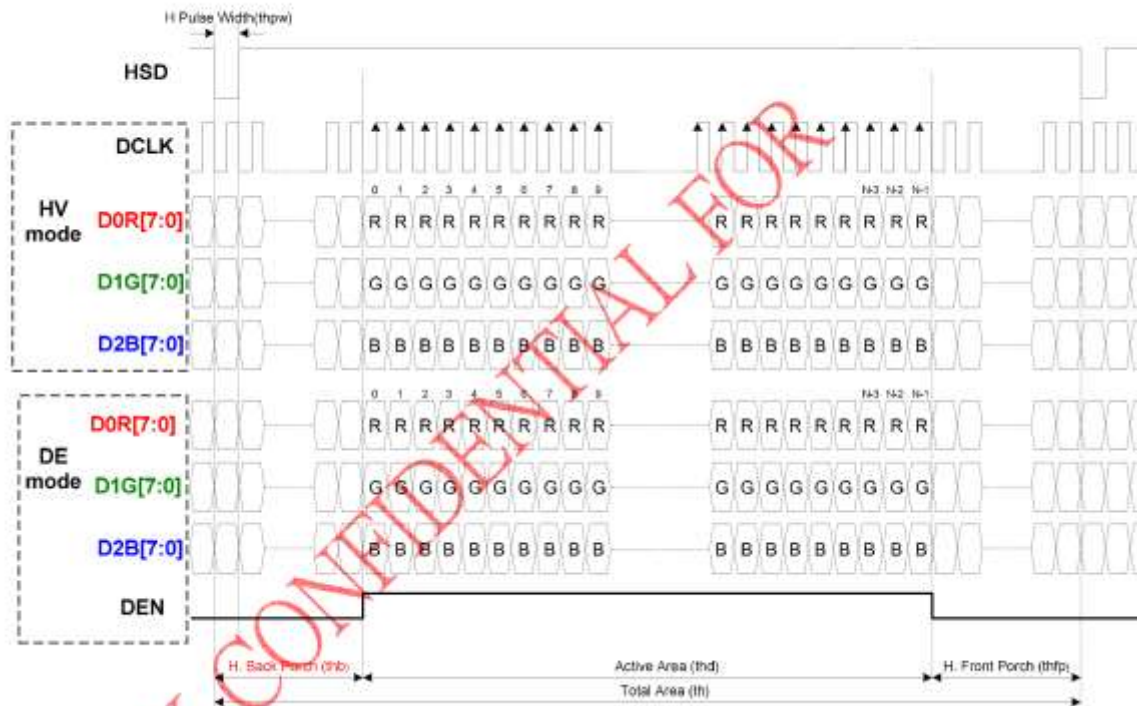


## Vertical Input Timing

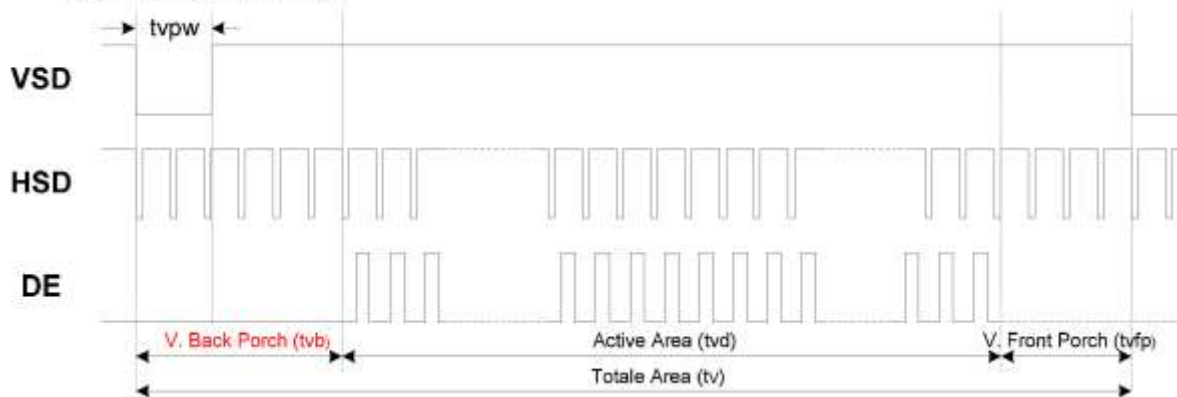

## 7.3 Power ON/OFF sequence

VCC power and LED on/off sequence are as follows. Interface signals are also shown in the chart. Signal shall be Hi-Z state or low level when VCC is off.

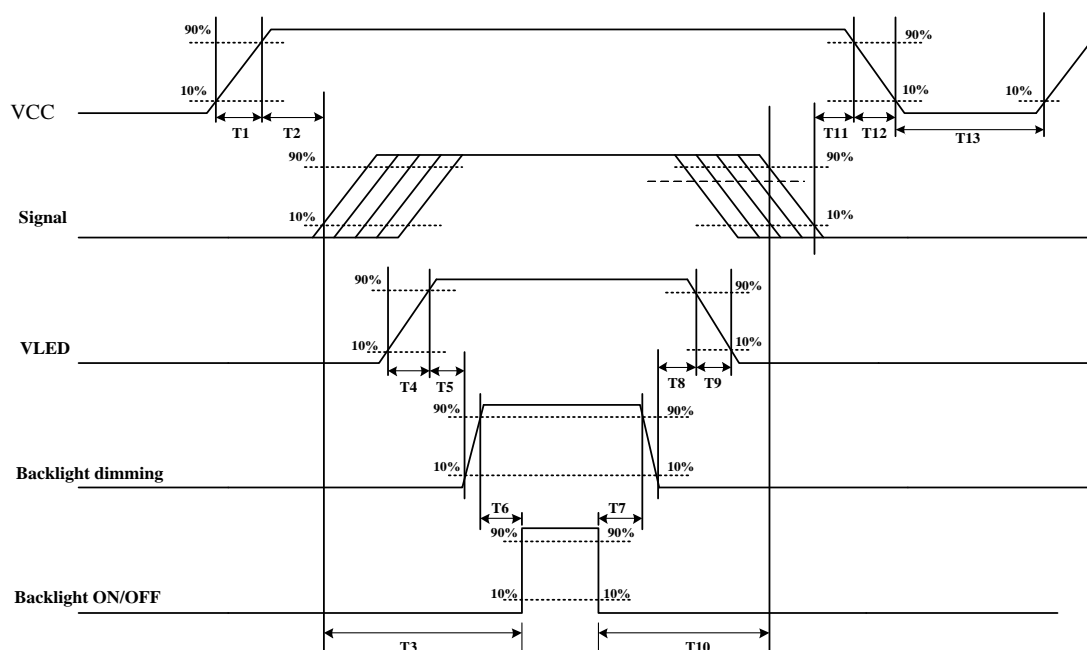

Parameter	Value			Units
	Min.	Typ.	Max.	
T1	0.5	-	10	[ms]
T2	0	40	50	[ms]
T3	200	-	-	[ms]
T4	0.5	-	10	[ms]
T5	10	-	-	[ms]
T6	10	-	-	[ms]
T7	0	-	-	[ms]
T8	10	-	-	[ms]
T9	-	-	10	[ms]
T10	110	-	-	[ms]
T11	0.5	16	50	[ms]
T12	-	-	100	[ms]
T13	1000	-	-	[ms]

## 8. Touch Panel Electrical Specification

### Basic Characteristic

ITEM	SPECIFICATION
Type	Projective Capacitive Touch Panel
Activation	Multi-finger
X/Y Position Reporting	Absolute Position
Touch Force	No contact pressure required
Calibration	No need for calibration
Report Rate	Approx. 100 points/sec
Interface	USB
Control IC	<a href="#">EXC80W32</a>

Specify the normal operating condition  
(GND=0V)

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Power Supply Voltage	VIN	4.75	5.0	5.25	V	
Power Current	IIN		TBD			

### Interface

CN6		
Pin No.	Symbol	Function
1	GND	GND
2	DA-	USB differential signal
3	DA+	USB differential signal
4	VIN	USB Power 5V
5	NA	No connection
6	NA	No connection

## 9. Reliability Test Conditions

Test Item	Test Conditions	Note
High Temperature Operation	70±3°C , t=240 hrs	
Low Temperature Operation	-20±3°C , t=240 hrs	
High Temperature Storage	80±3°C , t=240 hrs	1,2
Low Temperature Storage	-30±3°C , t=240 hrs	1,2
Storage at High Temperature and Humidity	60°C, 90% RH , 240 hrs	1,2

Note(1) Condensation of water is not permitted on the module.

Note(2) The module should be inspired after 1 hour storage in normal conditions (15~35°C , 45~65%RH).

Note(3) The module shouldn't be tested over one condition, and all the tests are independent.

Note(4) All reliability tests should be done without the protective film.

Definitions of life end point:

- Current drain should be smaller than the specific value.
- Function of the module should be maintained.
- Appearance and display quality should not have degraded noticeably.
- Contrast ratio should be greater than 50% of initial value.



## 10. General Precautions

### 10.1 Safety


- (1) Liquid crystal is poisonous. Do not put it your mouth. If the liquid crystal touches you skin or clothes, you need to wash it off immediately with the soap and water.


### 10.2 Handling

- (1) The LCD panel is plate glass. Do not subject the panel to mechanical shock or excessive force on its surface.
- (2) The polarizer which attached to the display is easily damaged. Please handle it carefully to avoid scratch or other damages.
- (3) To avoid contamination on the display surface, do not touch the module surface with bare hands.
- (4) Keep a space so that the LCD panels do not touch other components.
- (5) Put on cover board such as acrylic board, which covers on the surface of LCD panel to protect panel from damages.
- (6) Transparent electrodes may be disconnected if you use the LCD panel under environmental conditions where the condensation of dew occurs.
- (7) Do not leave module in direct sunlight to avoid malfunction of the ICs.


### 10.3 Mechanism

- (1) Please mount LCD module by using mounting holes arranged in four corners tightly.
- (2) Please hold the LCD module properly when you use or store it.
- (3) The square adhesive tape which is between the touch panel and display can't provide well supporting in the long term and high ambient temperature condition. Whether upright or horizontal position the support holder which is in the back side of the display is needed. Do not let the display floating.

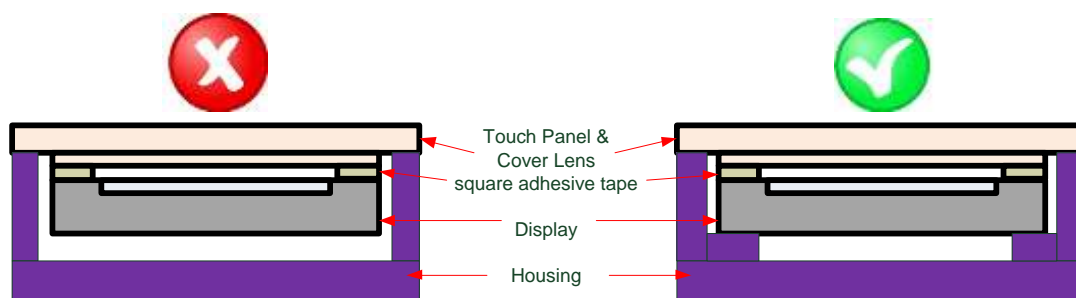

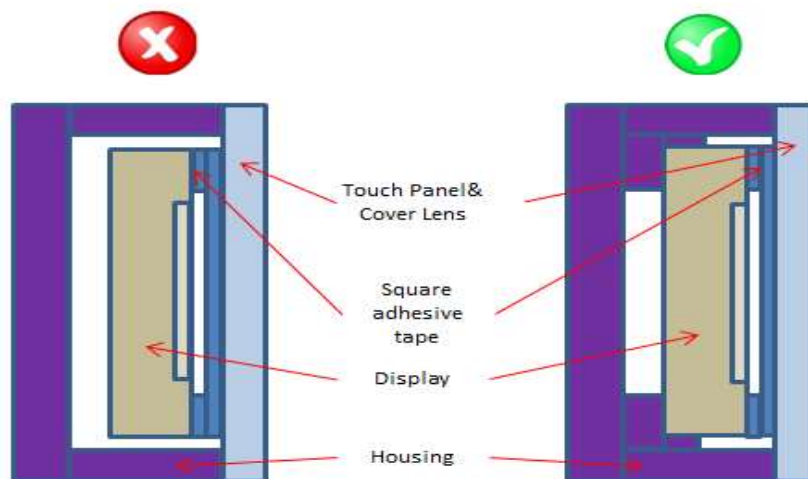

- (4) TP needs to work in environment with stable stray capacitance. In order to minimize the variation in stray capacitance, all conductive mechanical parts must not be floating. Intermittent floating any conductive part around the touch sensor may cause significant stray capacitance change and abnormal touch function. It is recommended to keep all conductive parts having same electrical potential as the GND of the touch controller module.

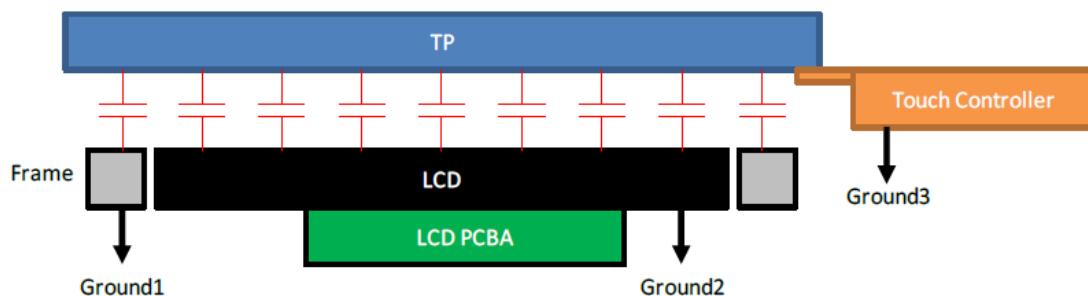

GND1, GND2 and GND3 should be connected together to have the same ground

#### 10.4 Static Electricity

- (1) Be sure to ground module before you turn on power or operation module.
- (2) Do not apply voltage which exceeds the absolute maximum rating value.

#### 10.5 Storage

- (1) Store the module in a dark room where it must keep at  $+25\pm 10^{\circ}\text{C}$  and 65%RH or less.
- (2) Do not store the module in surroundings which are containing organic solvent or corrosive gas.
- (3) Store the module in an anti-electrostatic container or bag.

## 10.6 Cleaning

- (1) Do not wipe the polarizer with dry cloth. It might cause scratch.
- (2) Only use a soft cloth with IPA to wipe the polarizer, other chemicals might permanent damage to the polarizer.

## 10.7 Others

- (1) AMIPRE will provide one year warranty for all products and three months warranty for all repairing products.
- (2) Do not apply fixed pattern data signal to the LCD module as you are using the product.
- (3) Do not keep the LCD at the same display pattern continually. The residual image will happen and it will damage the LCD. Please use screen saver.

11. OUTLINE DIMENSION

