


## MSC SM2S-V2L

Renesas RZ/V2L Arm<sup>®</sup>  
Cortex™-A55/M33

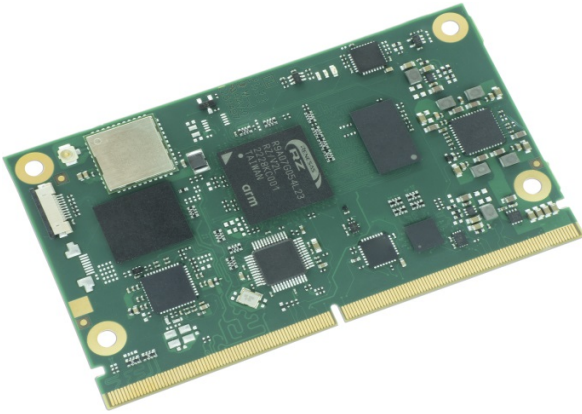

82 x 50 mm

4-6 W

-40 +85



## Description

The new MSC SM2S-V2L SMARC 2.1.1 module family is equipped with cost-effective and power-efficient RZ/V2L Arm Cortex-A55 processors, manufactured by Renesas. The module integrates a single- or dual-core Arm Cortex-A55 processor running at 1.2 GHz, an Arm Cortex-M33 real-time processor and an efficient multimedia 2D/3D graphics and video processing unit (GPU and VPU). An additional DRP-AI (Dedicated AI-Accelerator) is also provided by RZ/V2L processors. The typical design power ranges from 4 to 6 W.

The MSC SM2S-V2L offers cost-effective DDR4 memory technology, combined with up to 256GB eMMC Flash memory. Various interfaces for embedded applications such as Dual Gigabit Ethernet, USB 2.0, dual CAN-FD, dual-channel LVDS and MIPI CSI-2 for connecting a camera are available. An on-board Wireless Module is provided as assembly options.

The module is compliant with the new SMARC 2.1.1 standard, allowing easy integration with SMARC baseboards. For evaluation and design-in of the MSC SM2S-V2L module, Avnet Embedded provides a development platform and a starter kit. Support for Linux is available (Android support on request).

## Highlights

- Single or Dual core Arm Cortex-A55 Microprocessor at 1.2GHz
- Arm Cortex-M33 Real Time Processor at 200MHz
- Arm Mali-G31 multimedia 2D/3D Graphics Processing Unit (GPU)
- H.264 Video Encoding and Decoding (VPU)
- DRP-AI (Dedicated AI-Accelerator)
- Up to 2GB DDR4 SDRAM with inline ECC
- Up to 256GB eMMC Flash
- Dual-channel LVDS
- MIPI CSI-2 Camera interface
- Up to 4x USB 2.0 Host interfaces
- 1x USB 2.0 Host/Device interface
- Dual Gigabit Ethernet
- Wireless Module (optional)
- MMC/SD/SDIO interface (optional)
- 2x CAN-FD interfaces
- 2x I2S Audio interfaces
- 14x GPIO
- UART, SPI, I2C
- SMARC 2.1.1 Compliant

## Technical Data - MSC SM2S-V2L

<b>Technology</b>	Arm
<b>Formfactor</b>	SMARC Short Size
<b>CPU</b>	<p>Renesas RZ/V2L family</p> <ul style="list-style-type: none"> <li>- Single Core Arm Cortex-A55 at 1.2GHz, secure</li> <li>- Single Core Arm Cortex-A55 at 1.2GHz, non-secure</li> <li>- Dual Core Arm Cortex-A55 at 1.2GHz, secure</li> <li>- Dual Core Arm Cortex-A55 at 1.2GHz, non-secure</li> </ul> <p>Arm Cortex-M33 Real Time Processor at 200MHz</p> <p>Embedded DRP-AI (Dedicated AI-Accelerator)</p>
<b>Chipset</b>	SOC
<b>RAM</b>	Up to 2GB 1600MT/s DDR4 SDRAM, soldered, inline ECC support
<b>Flash</b>	Up to 256GB eMMC Flash
<b>Storage Interfaces</b>	1x MMC/SD/SDIO (optional, SDIO and WIFI/BT are mutual exclusive)
<b>USB</b>	1x USB 2.0 Host/Client, 4x USB 2.0 Host or 1x USB 2.0 Host/Client, 1x USB 2.0 Host (optional)
<b>Serial Interfaces</b>	2x UART with TxD, RxD, RTS, CTS 2x UART with TxD, RxD only
<b>Bus Interfaces</b>	4x I2C up to 400 Kbit/s 2x SPI (with two chip selects) 2x CAN-FD
<b>Display Controller</b>	<p>Arm Mali-G31 multimedia 2D/3D Graphics Processing Unit (GPU)</p> <p>OpenGL ES1.1, 2.0, 3.0, 3.1 and 3.2 support</p> <p>OpenCL 2.0 Full Profile support</p> <p>Video Codec Processor with H.264 support</p>
<b>Display Interfaces</b>	Dual-channel LVDS interface, 18 or 24 bit (up to 1920x1080); also usable as one single-channel LVDS interface (up to 1366x768) or MIPI-DSI Display Interface, 4 lanes, up to 1920x1080 @ 60fps (optional)
<b>Network Interface</b>	<p>2x 10/100/1000BASE-T Ethernet</p> <p>Wireless Module with 802.11b/g/n and Bluetooth 5.0, single band 2.4GHz, soldered (optional, SDIO and WIFI/BT are mutual exclusive)</p>
<b>Audio Interface</b>	2x I2S Audio
<b>Security Device</b>	<p>Advanced Security, Safety, and Reliability integrated in the SOC</p> <p>Trusted Platform Module (TPM) 2.0 (optional)</p>

<b>Miscellaneous</b>	Watchdog Timer for system reset (programmable, 1s ... 600s)  RTC / temperature compensated (optional)  14x GPIO, configurable as input or output, interrupt capable  64kbit ID EEPROM on I2C bus  MIPI CSI-2 camera interface (CSI0, 2 lane) or MIPI CSI-2 camera interface (CSI1, 4-lane)
<b>Feature Highlights</b>	SMARC 2.1.1 compatible
<b>Firmware</b>	uboot
<b>OS Support</b>	Linux Board Support Package Android Board Support Package (on request)
<b>Power Requirement</b>	Power Main: +5V +/-5% Power Standby: +5V +/-5% Power Consumption 4-6 W typ. (depending on CPU and optional features)
<b>Environment</b>	Temperature Range: Commercial: 0°C ... 70°C (operating) -20°C ... 85°C (storage) Extended: -25°C ... 85°C (operating) -40°C ... 85°C (storage) Industrial: -40°C ... 85°C (operating) -40°C ... 85°C (storage)  Humidity: 5 ... 95% (operating, non-condensing) 5 ... 95% (storage, non-condensing)
<b>Dimensions</b>	82 x 50 mm
<b>Certificates</b>	UL / CE
<b>Cooling</b>	Heatspreader
<b>Carrier</b>	MSC SM2-MB-EP1 MSC SM2-MB-EP5

## Order Reference - MSC SM2S-V2L

Order Number	Description	Reference	Cat*
113809	SMARC module based on Renesas RZ/V2L Dual-Core Cortex-A55 processor at 1.2GHz, DRP-AI, 2GB DDR4, 32GB eMMC Flash, 2x GbE LAN, 4x USB2.0 Host, 1x USB2.0 Host/Device, 2x CAN, no SDIO, BT/WLAN, TPM, LVDS, MIPI CSI-2 Camera input (CSI1, 4 lane); industrial temperature -40...+85°C	MSC SM2S-V2L-DCN-15N02C1I PCBFTX	PV

\*COM products are divided in two categories, „PV“ (preferred variant) and „OR“ (on request).

## Accessories

Order Number	Description	Reference
<b>Carrier Options</b>		
68488	SMARC 2.0 Embedded Platform with PCI Express x4 slot, GbE, SATA, USB 3.0, USB 2.0, USB 2.0 OTG, RS232, CAN, SPI, eSPI, SMBus, I2C and GPIO interface, LVDS/eDP, DisplayPort and HDMI display interface, regulated backlight supply, HD/I2S audio interface, MIPI CSI-2 camera interface, mini PCI Express card slot, SD card slot, fan connector, CMOS battery, Mini-ITX form factor (170 x 170 mm), ATX power connector and single 12V/24V power jack, commercial temperature range 0..+70°C	MSC SM2-MB-EP1-001 PCBFTX
83977	SMARC 2.x compatible embedded platform (146 x 80mm), 10-36V input voltage, 3x RS232, 2x CAN, dual RJ45 LAN with LED (1 x LAN i210) , 1x M.2 2280 Key M slot, mPCIe slot, 1x USB 3.0 Type A, 1x USB 2.0 Type A, 1x USB 2.0 internal, 1x USB 2.0 Host/Device, 2x SPI, I <sup>2</sup> C, 8 GPIO on FC, 1x HDMI, LVDS/eDP/DSI on J1LI30 connector, SD Card Slot, regulated backlight supply, I2S Audio, 1W Mono, camera connector, RTC battery. Industrial temperature range -40..+85°C, ARM full version	MSC SM2S-MB-EP5-002 PCBFTX
83981	SMARC 2.x compatible embedded platform (146 x 80mm), 10-36V input voltage, 2x UART, 1x RS232, 2x CAN, 1x RJ45 LAN with LED, 1x USB 2.0 Type A, 1x USB3.0 Type A, 1x USB 2.0 internal, 1x USB 2.0 Host/Device, 2x SPI, 12 GPIO on FC, 1x HDMI , SD Card Slot, LVDS/eDP/DSI on J1LI30 connector, regulated backlight supply, RTC battery. Industrial temperature range -40..+85°C, ARM slim version	MSC SM2S-MB-EP5-004 PCBFTX
<b>Cooling Options</b>		
110192	Heatspreader for SM2S-G2L and SM2S-V2L module, consisting of a single-piece aluminum plane and thermal pad for contact to the processor, with 2.7mm through-hole standoffs	MSC SM2S-X2L-01 HSP-001
<b>Other Accessories</b>		
82479	Debug Console (UART) Adapter for i.MX6-based Qseven and nanoRISC modules, with 8-pin FFC cable to connect COM module to 9-pin D-Sub connector	MSC Debug Console Adapter
68948	Debug Adapter for i.MX6-based Qseven, SMARC and nanoRISC modules, with 10-pin FFC cable to connect to COM module, adapter provides headers for JTAG connection to Lauterbach and/or Goepel debuggers	MSC JTAG Adapter FFC 10-pin

Avnet Embedded GmbH  
 Industriestr. 16  
 76297 Stutensee

AvnetEmbedded@avnet.com  
[avnet.com/embedded](http://avnet.com/embedded)

Copyright © 2024 Avnet. All data is for information purposes only and is subject to change without notice. No guarantee for legal purposes is implied. Information in this document has been carefully checked, however, no responsibility for inaccuracies has to be assumed. All brand or product names may be trademarks and property of their respective owners.