



Product Specification

G156XTN02.0

AU OPTRONICS CORPORATION

- () Preliminary Specifications
(v) Final Specifications

Module	15.6" (15.55) HD 16:9 Color TFT-LCD with <i>LED Backlight</i> design
Model Name	G156XTN02.0

<table><tr><td>Customer</td><td>Date</td></tr><tr><td><hr/></td><td><hr/></td></tr><tr><td>Checked & Approved by</td><td></td></tr><tr><td><hr/></td><td><hr/></td></tr></table>	Customer	Date	<hr/>	<hr/>	Checked & Approved by		<hr/>	<hr/>	<table><tr><td>Approved by</td><td>Date</td></tr><tr><td><u>Sean Lin</u></td><td><u>2019/06/05</u></td></tr><tr><td>Prepared by</td><td></td></tr><tr><td><u>Sandy Su</u></td><td><u>2019/06/05</u></td></tr></table>	Approved by	Date	<u>Sean Lin</u>	<u>2019/06/05</u>	Prepared by		<u>Sandy Su</u>	<u>2019/06/05</u>
Customer	Date																
<hr/>	<hr/>																
Checked & Approved by																	
<hr/>	<hr/>																
Approved by	Date																
<u>Sean Lin</u>	<u>2019/06/05</u>																
Prepared by																	
<u>Sandy Su</u>	<u>2019/06/05</u>																
Note: This Specification is subject to change without notice.	General Display Business Unit / AU Optronics corporation																



Contents

1. Operating Precautions.....	4
2. General Description.....	5
2.1 Display Characteristics	5
2.2 Optical Characteristics	6
3. Functional Block Diagram	11
4. Absolute Maximum Ratings	12
4.1 Absolute Ratings of TFT LCD Module.....	12
4.2 Absolute Ratings of Environment	12
5. Electrical Characteristics	13
5.1 TFT LCD Module	13
5.2 Backlight Unit.....	16
6. Signal Characteristic	17
6.1 Pixel Format Image	17
6.2 Integration Interface Requirement	18
6.3 Interface Timing	20
6.4 Power ON/OFF Sequence	21
7. Reliability Test Criteria	24
7.1 Vibration Test	24
7.2 Shock Test	24
7.3 Reliability Test.....	24
8. Mechanical Characteristics	25
8.1 LCM Outline Dimension (Front View)	25
8.2 LCM Outline Dimension (Rear View)	26
9. Label and Packaging	27
9.1 Shipping Label (on the rear side of TFT-LCD display)	27
9.2 Carton Package.....	28
9.3 Handling guide.....	29
10. Appendix: EDID Description.....	32
11. Safety.....	35



Record of Revision

Version and Date	Page	Old description	New Description																																																																																																																																
V1.0 2018/01/05	All	Final Edition for Customer																																																																																																																																	
V1.1 2018/02/09	P.33 P.34	EDID <table><thead><tr><th>Address</th><th>Value</th><th>Value</th><th>Value</th></tr></thead><tbody><tr><td>48</td><td>DF</td><td>11011111</td><td>223</td></tr><tr><td>49</td><td>13</td><td>00010011</td><td>19</td></tr><tr><td>4A</td><td>56</td><td>01010110</td><td>86</td></tr><tr><td>4B</td><td>C0</td><td>11000000</td><td>192</td></tr><tr><td>4C</td><td>50</td><td>01010000</td><td>80</td></tr><tr><td>4E</td><td>30</td><td>00110000</td><td>48</td></tr><tr><td>4F</td><td>30</td><td>00110000</td><td>48</td></tr><tr><td>50</td><td>08</td><td>00001000</td><td>8</td></tr><tr><td>51</td><td>0A</td><td>00001010</td><td>10</td></tr><tr><td>52</td><td>31</td><td>00110001</td><td>49</td></tr><tr><td>54</td><td>58</td><td>01011000</td><td>88</td></tr><tr><td>55</td><td>C1</td><td>11000001</td><td>193</td></tr><tr><td>56</td><td>10</td><td>00010000</td><td>16</td></tr><tr><td>59</td><td>18</td><td>00011000</td><td>24</td></tr><tr><td>7F</td><td>EF</td><td>11101111</td><td>239</td></tr></tbody></table>	Address	Value	Value	Value	48	DF	11011111	223	49	13	00010011	19	4A	56	01010110	86	4B	C0	11000000	192	4C	50	01010000	80	4E	30	00110000	48	4F	30	00110000	48	50	08	00001000	8	51	0A	00001010	10	52	31	00110001	49	54	58	01011000	88	55	C1	11000001	193	56	10	00010000	16	59	18	00011000	24	7F	EF	11101111	239	Update EDID <table><thead><tr><th>Address</th><th>Value</th><th>Value</th><th>Value</th></tr></thead><tbody><tr><td>48</td><td>00</td><td>00000000</td><td>0</td></tr><tr><td>49</td><td>00</td><td>00000000</td><td>0</td></tr><tr><td>4A</td><td>00</td><td>00000000</td><td>0</td></tr><tr><td>4B</td><td>0F</td><td>00001111</td><td>15</td></tr><tr><td>4C</td><td>00</td><td>00000000</td><td>0</td></tr><tr><td>4E</td><td>00</td><td>00000000</td><td>0</td></tr><tr><td>4F</td><td>00</td><td>00000000</td><td>0</td></tr><tr><td>50</td><td>00</td><td>00000000</td><td>0</td></tr><tr><td>51</td><td>00</td><td>00000000</td><td>0</td></tr><tr><td>52</td><td>00</td><td>00000000</td><td>0</td></tr><tr><td>54</td><td>00</td><td>00000000</td><td>0</td></tr><tr><td>55</td><td>00</td><td>00000000</td><td>0</td></tr><tr><td>56</td><td>00</td><td>00000000</td><td>0</td></tr><tr><td>59</td><td>20</td><td>00100000</td><td>32</td></tr><tr><td>7F</td><td>FC</td><td>11111100</td><td>252</td></tr></tbody></table>	Address	Value	Value	Value	48	00	00000000	0	49	00	00000000	0	4A	00	00000000	0	4B	0F	00001111	15	4C	00	00000000	0	4E	00	00000000	0	4F	00	00000000	0	50	00	00000000	0	51	00	00000000	0	52	00	00000000	0	54	00	00000000	0	55	00	00000000	0	56	00	00000000	0	59	20	00100000	32	7F	FC	11111100	252
Address	Value	Value	Value																																																																																																																																
48	DF	11011111	223																																																																																																																																
49	13	00010011	19																																																																																																																																
4A	56	01010110	86																																																																																																																																
4B	C0	11000000	192																																																																																																																																
4C	50	01010000	80																																																																																																																																
4E	30	00110000	48																																																																																																																																
4F	30	00110000	48																																																																																																																																
50	08	00001000	8																																																																																																																																
51	0A	00001010	10																																																																																																																																
52	31	00110001	49																																																																																																																																
54	58	01011000	88																																																																																																																																
55	C1	11000001	193																																																																																																																																
56	10	00010000	16																																																																																																																																
59	18	00011000	24																																																																																																																																
7F	EF	11101111	239																																																																																																																																
Address	Value	Value	Value																																																																																																																																
48	00	00000000	0																																																																																																																																
49	00	00000000	0																																																																																																																																
4A	00	00000000	0																																																																																																																																
4B	0F	00001111	15																																																																																																																																
4C	00	00000000	0																																																																																																																																
4E	00	00000000	0																																																																																																																																
4F	00	00000000	0																																																																																																																																
50	00	00000000	0																																																																																																																																
51	00	00000000	0																																																																																																																																
52	00	00000000	0																																																																																																																																
54	00	00000000	0																																																																																																																																
55	00	00000000	0																																																																																																																																
56	00	00000000	0																																																																																																																																
59	20	00100000	32																																																																																																																																
7F	FC	11111100	252																																																																																																																																
V1.2 2019/06/05	P18	Note1: Start from right side.	Add Due to PCB silkscreen PIN 1 printing error, please follow spec mark																																																																																																																																
	P26	8.1 LCM outline dimension	Add Note: Due to PCB silkscreen PIN 1 printing error, please follow spec mark																																																																																																																																

1. Operating Precautions

- 1) Since front polarizer is easily damaged, please be cautious and not to scratch it.
- 2) Be sure to turn off power supply when inserting or disconnecting from input connector.
- 3) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.
- 4) When the panel surface is soiled, wipe it with absorbent cotton or soft cloth.
- 5) Since the panel is made of glass, it may be broken or cracked if dropped or bumped on hard surface.
- 6) Since CMOS LSI is used in this module, take care of static electricity and insure human earth when handling.
- 7) Do not open nor modify the module assembly.
- 8) Do not press the reflector sheet at the back of the module to any direction.
- 9) In case if a module has to be put back into the packing container slot after it was taken out from the container, do not press the center of the LED Reflector edge. Instead, press at the far ends of the LED Reflector edge softly. Otherwise the TFT Module may be damaged.
- 10) At the insertion or removal of the Signal Interface Connector, be sure not to rotate nor tilt the Interface Connector of the TFT Module.
- 11) TFT-LCD Module is not allowed to be twisted & bent even force is added on module in a very short time. Please design your display product well to avoid external force applying to module by end-user directly.
- 12) Small amount of materials without flammability grade are used in the TFT-LCD module. The TFT-LCD module should be supplied by power complied with requirements of Limited Power Source (IEC60950-1 or UL60950-1), or be applied exemption.
- 13) Severe temperature condition may result in different luminance, response time.
- 14) Continuous operating TFT-LCD Module under high temperature environment may accelerate LED light bar exhaustion and reduce luminance dramatically.
- 15) The data on this specification sheet is applicable when TFT-LCD module is placed in landscape position.
- 16) Continuous displaying fixed pattern may induce image sticking. It's recommended to use screen saver or moving content periodically if fixed pattern is displayed on the screen.



2. General Description

G156XTN02.0 is a Color Active Matrix Liquid Crystal Display composed of a TFT-LCD display, a driver circuit, and LED backlight system. The screen format is intended to support 16:9 HD, 1366(H) x 768(V) screen and 262k colors (RGB 6-bits data driver) with LED backlight driving circuit. All input signals are eDP (Embedded DisplayPort) interface compatible.

G156XTN02.0 is designed for a display unit of notebook style personal computer and industrial machine.

2.1 Display Characteristics

The following items are characteristics summary on the table under 25°C condition:


Items	Unit	Specifications			
Screen Diagonal	[mm]	15.6" (15.55)			
Active Area	[mm]	344.23 x 193.54			
Pixels H x V		1366x3(RGB) x 768			
Pixel Pitch	[mm]	0.252X0.252			
Pixel Format		R.G.B. Vertical Stripe			
Display Mode		Normally White			
White Luminance ($I_{LED}=24\text{ mA}$) (Note: I_{LED} is LED current)	[cd/m ²]	220 typ. (5 points average) 187 min. (5 points average)			
Luminance Uniformity		1.25 Max. (5 points)			
Contrast Ratio		400 typ.			
Response Time	[ms]	8 Typ. / 16 Max.			
Nominal Input Voltage VDD	[Volt]	+3.3 Typ.			
Power Consumption	[Watt]	3.5 (Include Logic and BLU Power)			
Weight	[Grams]	380 Max.			
Physical Size Include bracket.	[mm]		Min.	Typ.	Max.
		Length	359.0	359.5	360.0
		Width	223.3	223.8	224.3
		Thickness			3.2
Electrical Interface		eDP1.2			
Glass Thickness	[mm]	0.4			
Surface Treatment		Anti Glare, hardness 3H			
Support Color		262K colors (RGB 6-bit)			
Temperature Range Operating Storage (Non-Operating)	[°C] [°C]	0 to +50 -20 to +60			
RoHS Compliance		RoHS Compliance			

2.2 Optical Characteristics


The optical characteristics are measured under stable conditions at 25°C (Room Temperature):

Item		Symbol	Conditions	Min.	Typ.	Max.	Unit	Note
White Luminance			I _{LED} =24mA 5 points average	187	220	-	[cd/m ²]	1, 4, 5.
Viewing Angle		Θ _R	Horizontal (Right)	40	45	-	[degree]	4,9
		Θ _L	CR = 10 (Left)	40	45	-		
		Ψ _H	Vertical (Upper)	10	15	-		
		Ψ _L	CR = 10 (Lower)	30	35	-		
Luminance Uniformity		δ _{5P}	5 points	-	-	1.25		1, 3, 4
		δ _{13P}	13 points	-	-	1.60		2, 3, 4
Contrast Ratio		CR		300	400	-		4,6
Cross talk		%		-	-	4	%	4,7
Response Time		T _{RT}	Raising + Falling	-	8	16	[msec]	
Color/ Chromaticity Coordinates	Red	R _x	(CIE 1931)	0.545	0.575	0.605		4
		R _y		0.315	0.345	0.375		
	Green	G _x		0.310	0.340	0.370		
		G _y		0.540	0.570	0.600		
	Blue	B _x		0.130	0.160	0.190		
		B _y		0.105	0.135	0.165		
	White	W _x		0.283	0.313	0.343		
		W _y		0.299	0.329	0.359		
NTSC		%		35	45	-		

Note 1: 5 points position (Ref: Active area)

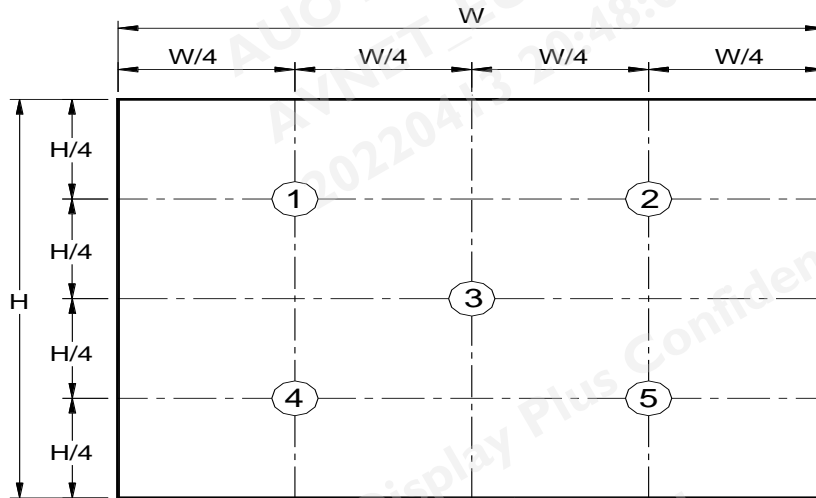

Note 2: 13 points position (Ref: Active area)

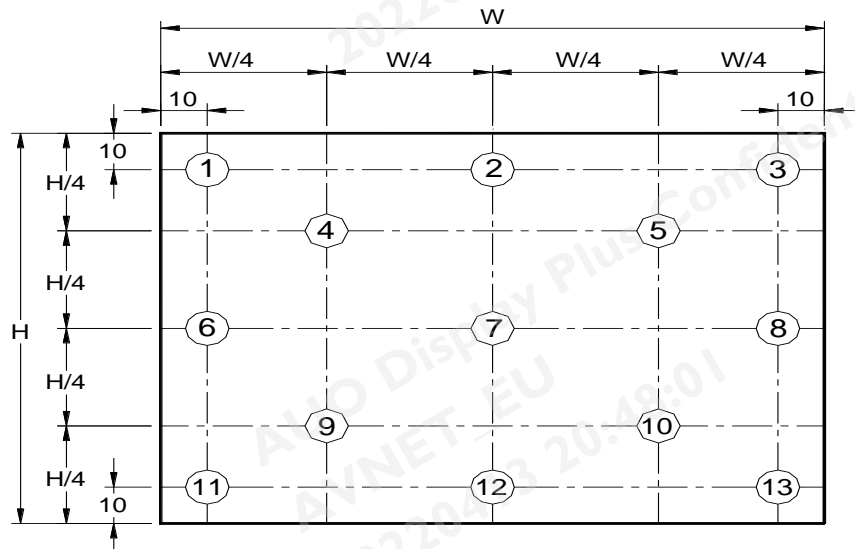


Note 3: The luminance uniformity of 5 or 13 points is defined by dividing the maximum luminance values by the minimum test point luminance

$$\delta_{w5} = \frac{\text{Maximum Brightness of five points}}{\text{Minimum Brightness of five points}}$$

$$\delta_{w13} = \frac{\text{Maximum Brightness of thirteen points}}{\text{Minimum Brightness of thirteen points}}$$

Note 4: Measurement method

The LCD module should be stabilized at given temperature for 30 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 30 minutes in a stable, windless and dark room, and it should be measured in the center of screen.

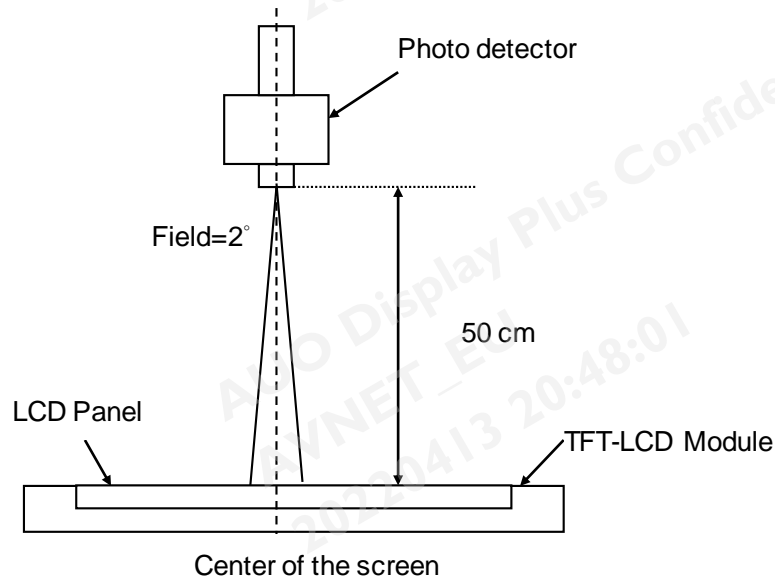

Note 5 : Definition of Average Luminance of White (Y_L):

Measure the luminance of gray level 63 at 5 points , $Y_L = [L(1) + L(2) + L(3) + L(4) + L(5)] / 5$
 $L(x)$ is corresponding to the luminance of the point X at Figure in Note (1).

Note 6 : Definition of contrast ratio (CR):

Contrast ratio is calculated with the following formula.

$$\text{Contrast ratio (CR)} = \frac{\text{Brightness on the "White" state}}{\text{Brightness on the "Black" state}}$$


Note 7 : Definition of Cross Talk (CT)

$$CT = |Y_B - Y_A| / Y_A \times 100 (\%)$$

Where


Y_A = Luminance of measured location without gray level 0 pattern (cd/m²)

Y_B = Luminance of measured location with gray level 0 pattern (cd/m²)

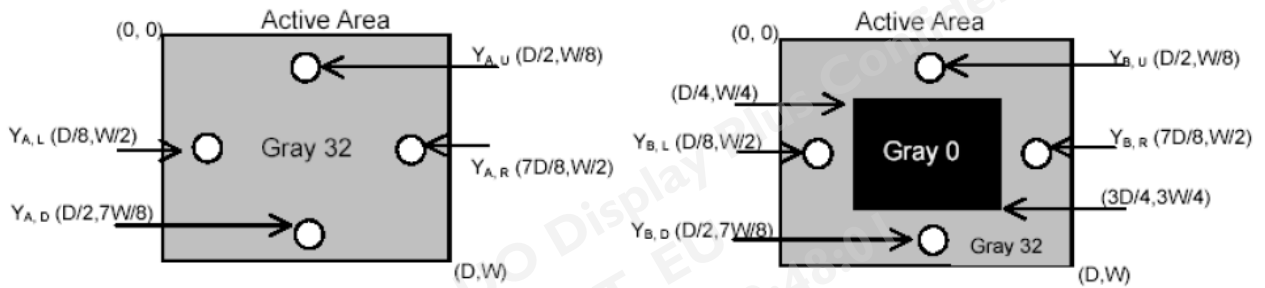


Note 8: Definition of response time:

The output signals of BM-7 or equivalent are measured when the input signals are changed from "Black" to "White" (falling time) and from "White" to "Black" (rising time), respectively. The response time interval between the 10% and 90% of amplitudes. Refer to figure as below.

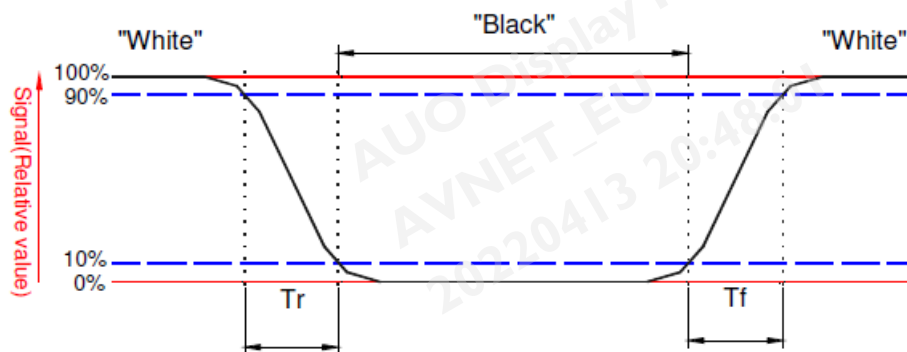


Note 9: Definition of viewing angle

Viewing angle is the measurement of contrast ratio ≥ 10 , at the screen center, over a 180° horizontal and 180° vertical range (off-normal viewing angles). The 180° viewing angle range is broken down as below: 90° (θ) horizontal left and right, and 90° (Φ) vertical high (up) and low (down). The measurement direction is typically perpendicular to the display surface with the screen rotated to its center to develop the desired measurement viewing angle.

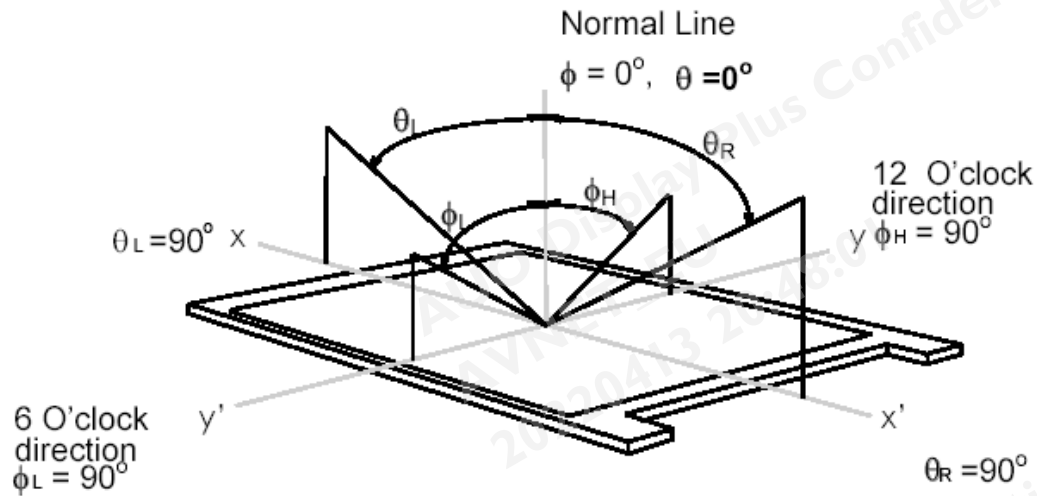

3. Functional Block Diagram

The following diagram shows the functional block of the 15.6 inches wide Color TFT/LCD 30 Pin.

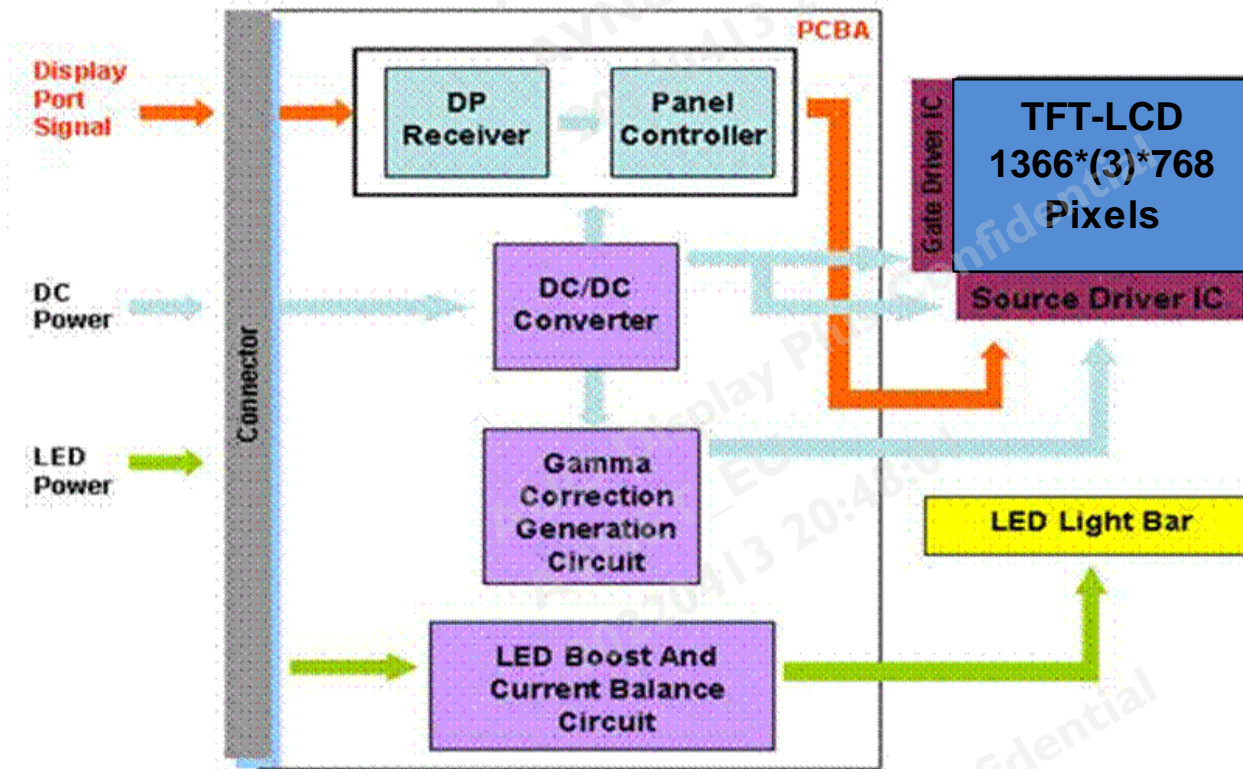

4. Absolute Maximum Ratings

An absolute maximum rating of the module is as following:

4.1 Absolute Ratings of TFT LCD Module

Item	Symbol	Min	Max	Unit	Conditions
Logic/LCD Drive Voltage	Vin	-0.3	+4.0	[Volt]	Note 1,2

4.2 Absolute Ratings of Environment


Item	Symbol	Min	Max	Unit	Conditions
Operating Temperature	TOP	0	+50	[°C]	Note 4
Operation Humidity	HOP	5	95	[%RH]	Note 4
Storage Temperature	TST	-20	+60	[°C]	Note 4
Storage Humidity	HST	5	95	[%RH]	Note 4

Note 1: At Ta (25°C)

Note 2: Permanent damage to the device may occur if exceed maximum values

Note 3: LED specification refer to section 5.2

Note 4: For quality performance, please refer to AUO IIS (Incoming Inspection Standard).

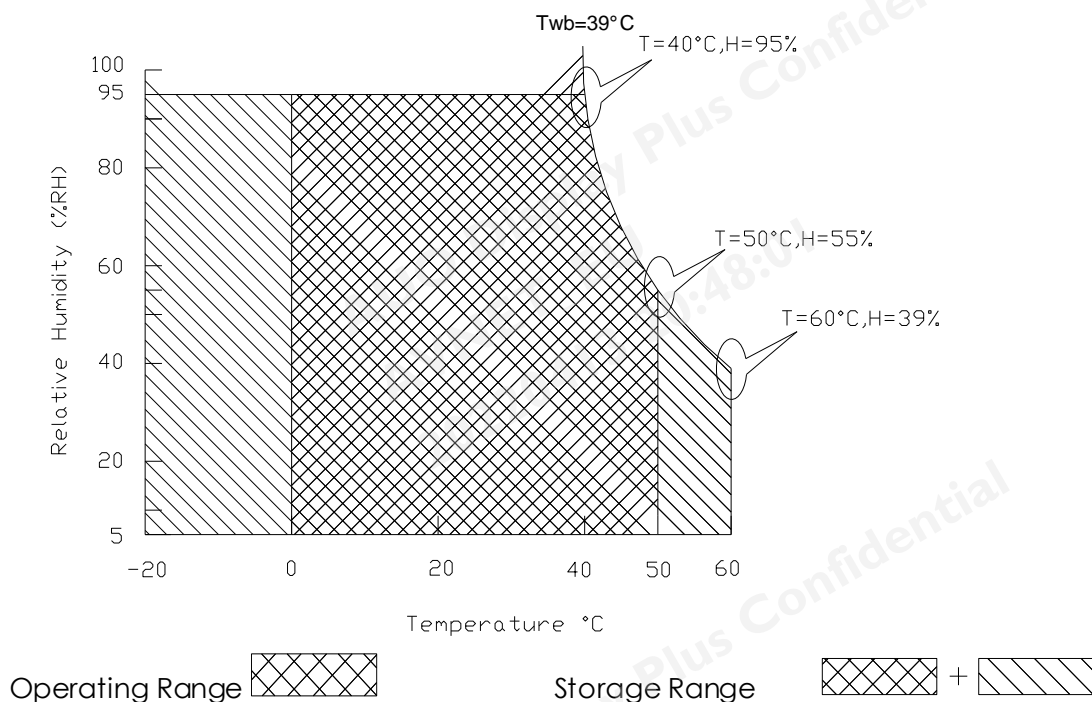

5. Electrical Characteristics

5.1 TFT LCD Module

5.1.1 Power Specification



Input power specifications are as follows;

The power specification are measured under 25°C and frame frequency under 60Hz.

Symbol	Parameter	Min	Typ	Max	Units	Remark
VDD	Logic/LCD Drive Voltage	3.0	3.3	3.6	[Volt]	
PDD	VDD Power	-	-	0.85	[Watt]	Note 1
IDD	IDD Current	-	-	260	[mA]	Note 1
Irush	LCD Inrush Current	-	-	2000	[mA]	Note 2
VDDrp	Allowable Logic/LCD Drive Ripple Voltage	-	-	100	[mV] p-p	

Note 1 : Maximum Measurement Condition : Black Pattern at 3.3V driving voltage. ($P_{max}=V_{3.3} \times I_{black}$)

Note 2 : Measure Condition

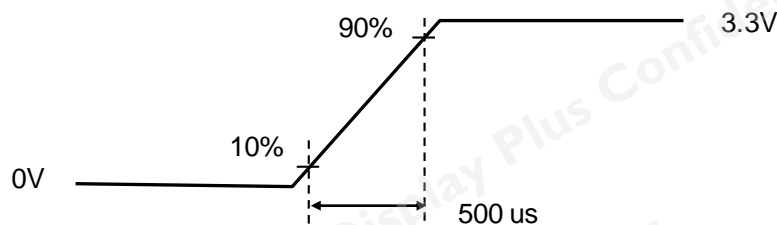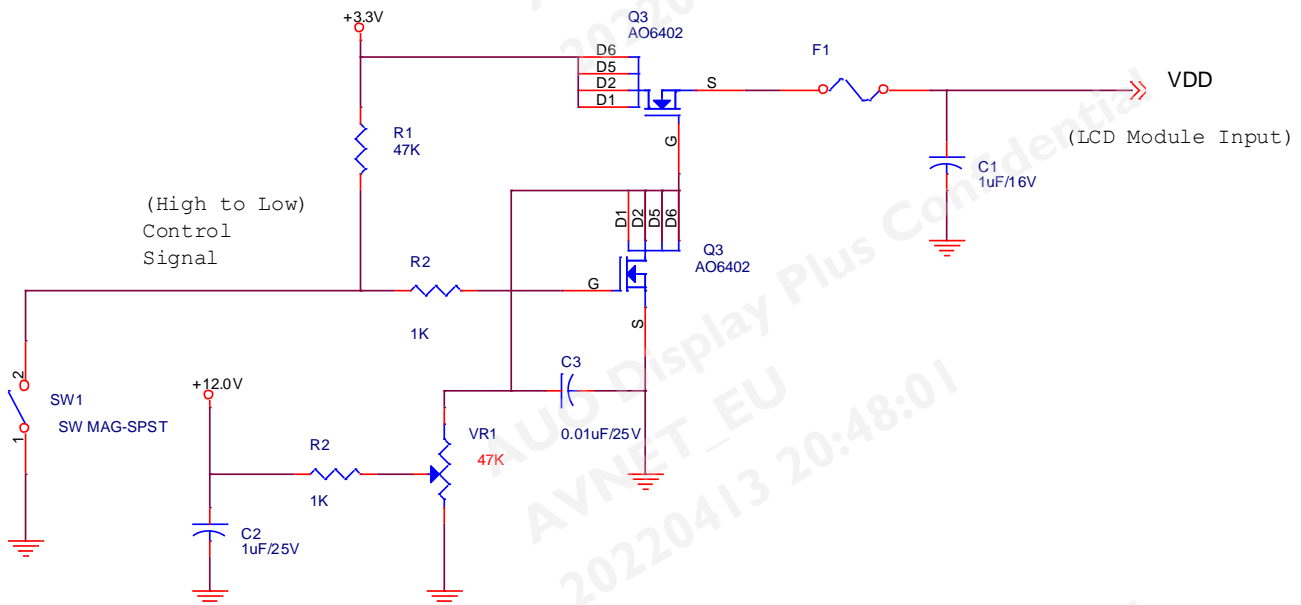


VDD rising time

5.1.2 Signal Electrical Characteristics

Input signals shall be low or High-impedance state when VDD is off.

Signal electrical characteristics are as follows;


Display Port main link signal:

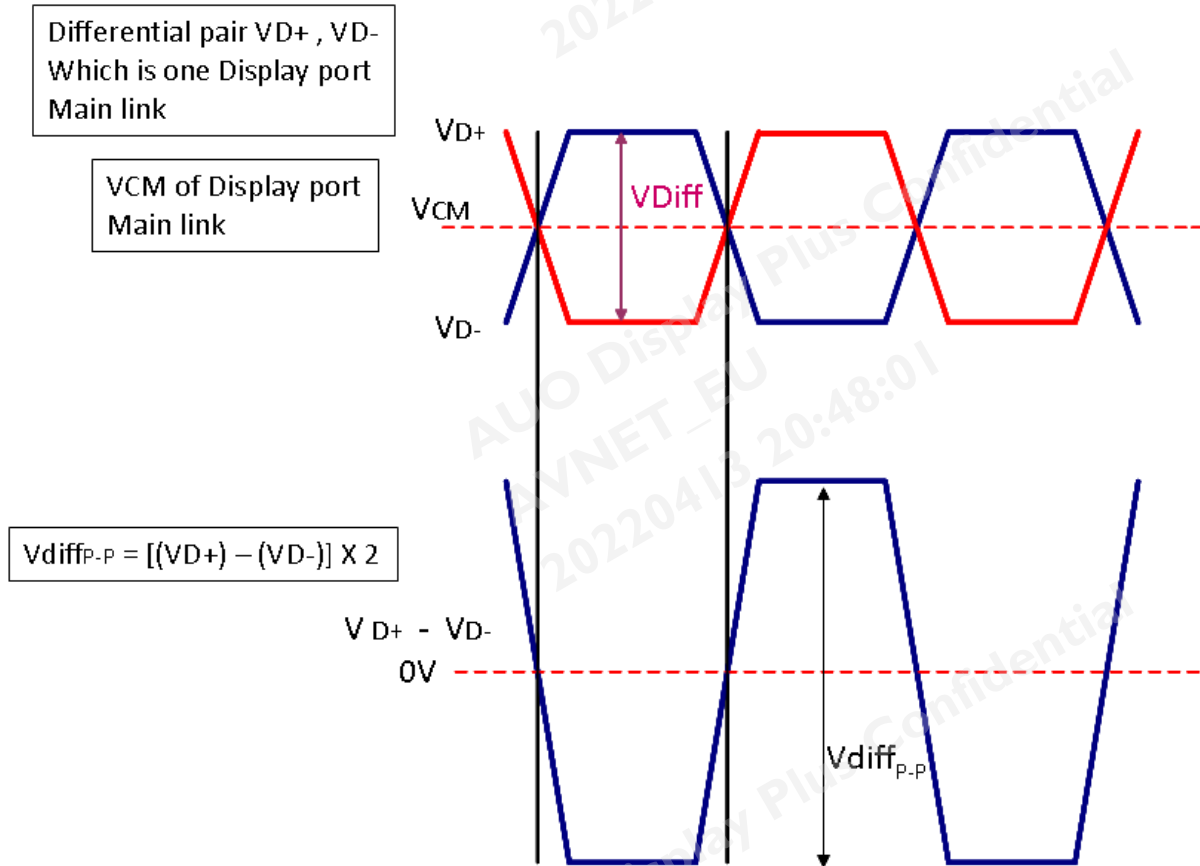

Display port main link					
		Min	Typ	Max	unit
VCM	RX input DC Common Mode Voltage		0		V
VDiff _{P-P}	Peak-to-peak Voltage at a receiving Device	100		1320	mV

Folow as VESA display port standard V1.1a

Display Port AUX_CH signal:

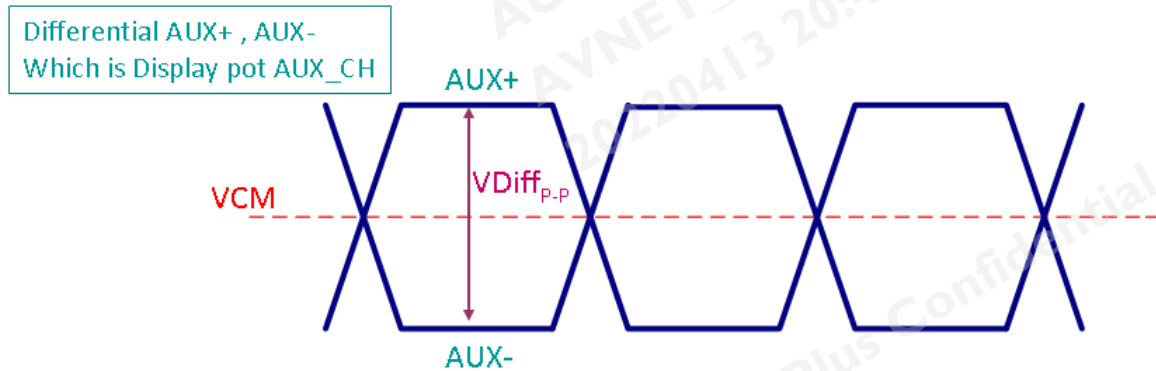

Display port AUX_CH					
		Min	Typ	Max	unit
VCM	AUX DC Common Mode Voltage		0		V
VDiff _{P-P}	AUX Peak-to-peak Voltage at a receiving Device	0.4	0.6	0.8	V

Follow as VESA display port standard V1.1a.

Display Port VHPD signal:

Display port VHPD					
		Min	Typ	Max	unit
VHPD	HPD Voltage	2.25		3.6	V

Follow as VESA display port standard V1.1a.

5.2 Backlight Unit

5.2.1 LED characteristics

Parameter	Symbol	Min	Typ	Max	Units	Condition
Backlight Power Consumption	PLED	-	-	2.65	[Watt]	(Ta=25°C), Note 1 Vin =12V
LED Life-Time	N/A	15,000	-	-	Hour	(Ta=25°C), Note 2 IF=25 mA

Note 1: Calculator value for reference $P_{LED} = VF$ (Normal Distribution) * IF (Normal Distribution) / Efficiency

Note 2: The LED life-time define as the estimated time to 50% degradation of initial luminous.

5.2.2 Backlight input signal characteristics


Parameter	Symbol	Min	Typ	Max	Units	Remark
LED Power Supply	VLED	5.0	12.0	21.0	[Volt]	Define as Connector Interface (Ta=25°C)
LED Enable Input High Level	VLED_EN *Note 1	2.5	-	5.5	[Volt]	
LED Enable Input Low Level		-	-	0.6	[Volt]	
PWM Logic Input High Level	VPWM_EN *Note 1	2.5	-	5.5	[Volt]	
PWM Logic Input Low Level		-	-	0.6	[Volt]	
PWM Input Frequency	FPWM	200	1K	10k	Hz	
PWM Duty Ratio	Duty	5	--	100	%	

Note 1 : Recommended system pull up/down resistor no bigger than 10kohm.

6. Signal Characteristic


6.1 Pixel Format Image

Following figure shows the relationship between input signal and LCD pixel format.

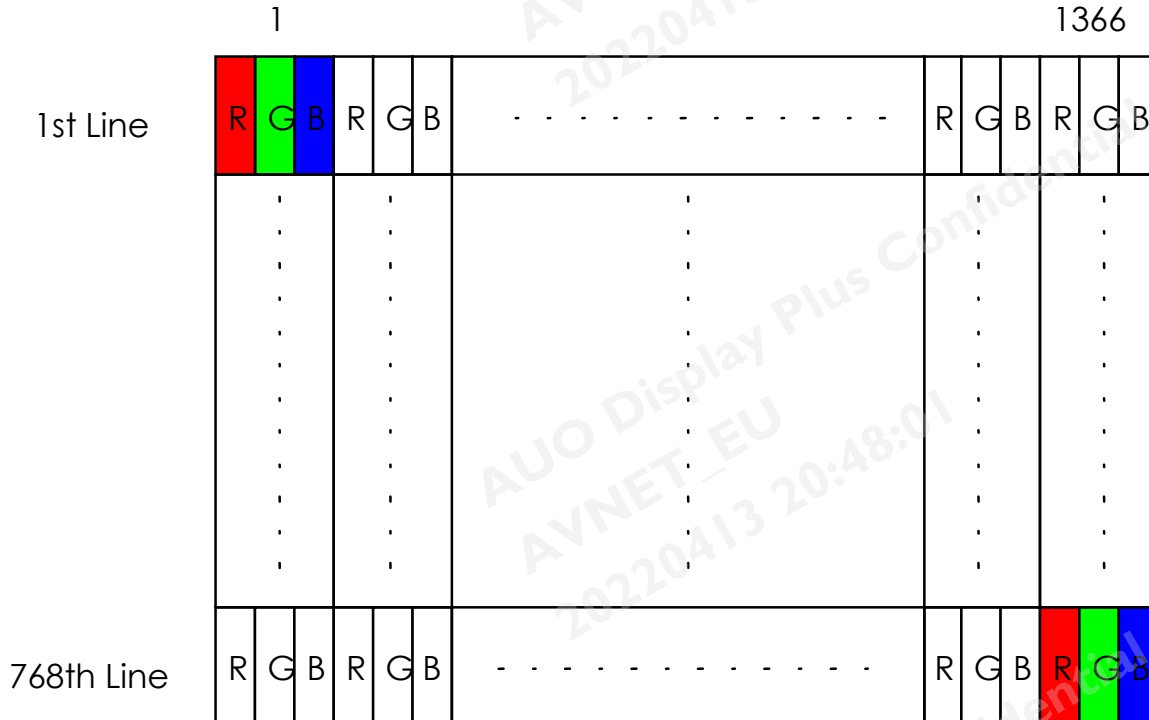

Scanning Direction

The following figures show the image seen from the front view. The arrow indicates the direction of scan.

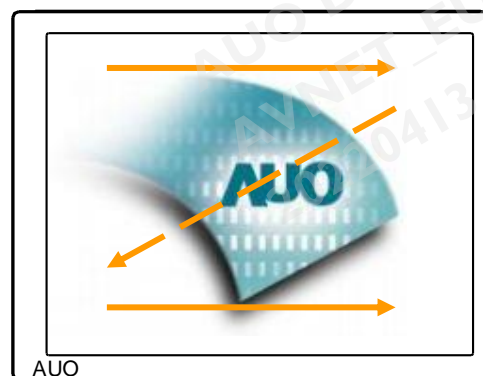


6.2 Integration Interface Requirement

6.2.1 Connector Description

Physical interface is described as for the connector on module.


These connectors are capable of accommodating the following signals and will be following components.

Connector Name / Designation	For Signal Connector
Manufacturer	JAE or Compatible
Type / Part Number	JAE HD2S030HA1 or Compatible
Mating Housing/Part Number	IPEX 20353-030T-11 or Compatible

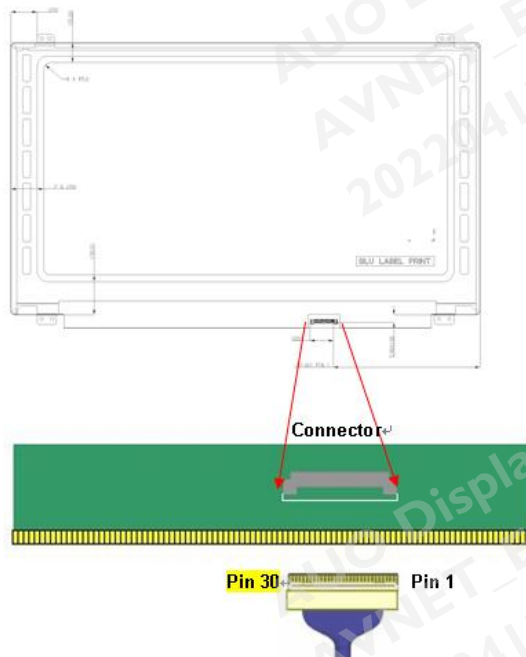

Note1: Start from right side. Due to PCB silkscreen PIN 1 printing error, please follow spec mark.

Note2: Input signals shall be low or High-impedance state when VDD is off.
Internal circuit of eDP inputs are as following.

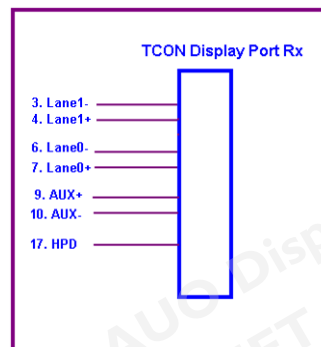

6.2.2 Pin Assignment

eDP lane is a differential signal technology for LCD interface and high speed data transfer device.

PIN NO	Symbol	Function
1	NC	NC
2	H_GND	High Speed Ground
3	NC	NC
4	NC	NC
5	H_GND	High Speed Ground
6	Lane0_N	Comp Signal Link Lane 0
7	Lane0_P	True Signal Link Lane 0
8	H_GND	High Speed Ground
9	AUX_CH_P	True Signal Auxiliary Ch.
10	AUX_CH_N	Comp Signal Auxiliary Ch.
11	H_GND	High Speed Ground
12	LCD_VCC	LCD logic and driver power
13	LCD_VCC	LCD logic and driver power
14	BIST	LCD Panel Self Test Enable
15	LCD GND	LCD logic and driver ground
16	LCD GND	LCD logic and driver ground
17	HPD	HPD signal pin
18	BL_GND	Backlight ground
19	BL_GND	Backlight ground
20	BL_GND	Backlight ground
21	BL_GND	Backlight ground
22	BL_Enable	Backlight ground
23	BL PWM DIM	System PWM signal Input
24	NC	NC
25	NC	NC
26	BL_PWR	Backlight power
27	BL_PWR	Backlight power
28	BL_PWR	Backlight power
29	BL_PWR	Backlight power
30	NC	No Connect

6.3 Interface Timing

6.3.1 Timing Characteristics

Basically, interface timings should match the 1366x768 /60Hz manufacturing guide line timing.


Parameter		Symbol	Min.	Typ.	Max.	Unit
Frame Rate		-	48	60	-	Hz
Clock frequency		1/ T _{Clock}	65	72	80	MHz
Vertical Section	Period	T _V	780	790	768+A	T _{Line}
	Active	T _{VD}	768			
	Blanking	T _{VB}	12	22	A	
Horizontal Section	Period	T _H	1426	1426	1366+B	T _{Clock}
	Active	T _{HD}	1366			
	Blanking	T _{HB}	60	96	B	

Note 1 : The above is as optimized setting

Note 2 : The maximum clock frequency = (1366+B)*(768+A)*60<80MHz


6.4 Power ON/OFF Sequence

Display Port panel power sequence:

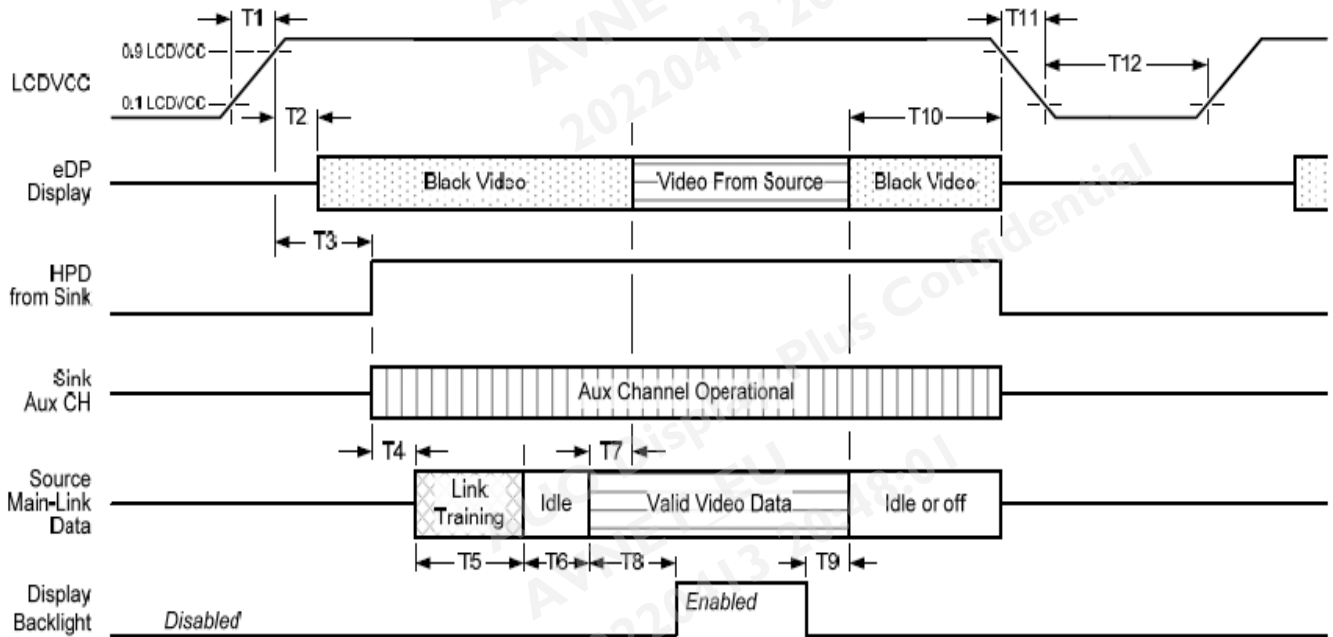

Display port interface power up/down sequence, normal system operation

Display Port AUX_CH transaction only:

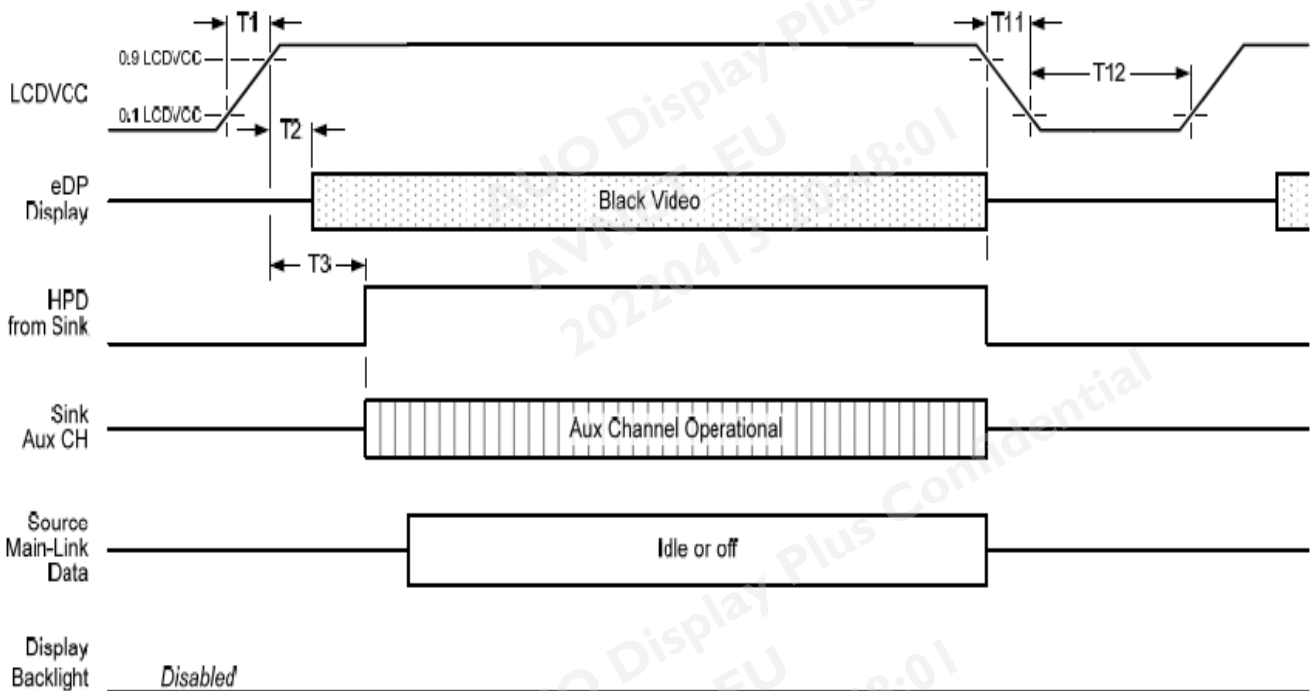

Display port interface power up/down sequence, AUX_CH transaction only



Display Port panel power sequence timing parameter:

Timing parameter	Description	Reqd. by	Limits			Notes
			Min.	Typ.	Max.	
T1	power rail rise time, 10% to 90%	source	0.5ms		10ms	
T2	delay from LCDVDD to black video generation	sink	0ms		200ms	prevents display noise until valid video data is received from the source
T3	delay from LCDVDD to HPD high	sink	0ms		200ms	sink AUX_CH must be operational upon HPD high.
T4	delay from HPD high to link training initialization	source				allows for source to read link capability and initialize.
T5	link training duration	source				dependant on source link to read training protocol.
T6	link idle	source				Min accounts for required BS-Idle pattern. Max allows for source frame synchronization.
T7	delay from valid video data from source to video on display	sink	0ms		50ms	max allows sink validate video data and timing.
T8	delay from valid video data from source to backlight enable	source				source must assure display video is stable.
T9	delay from backlight disable to end of valid video data	source				source must assure backlight is no longer illuminated.
T10	delay from end of valid video data from source to power off	source	0ms		500ms	
T11	power rail fall time, 90% to 10%	source			10ms	
T12	power off time	source	150ms			

Note1: The sink must include the ability to generate black video autonomously. The sink must automatically enable black video under the following conditions:


- upon LCDVDD power on (within T2 max)-when the "Novideostream_Flag" (VB-ID Bit 3) is received from the source (at the end of T9).

- when no main link data, or invalid video data, is received from the source. Black video must be displayed within 64ms (typ) from the start of either condition. Video data can be deemed invalid based on MSA and timing information, for example.


Note 2: The sink may implement the ability to disable the black video function, as described in Note 1, above, for system development and debugging purpose.

Note 3: The sink must support AUX_CH polling by the source immediately following LCDVDD power on without causing damage to the sink device (the source can re-try if the sink is not ready). The sink must be able to respond to an AUX_CH transaction with the time specified within T3 max.

Display Port panel B/L power sequence timing parameter:

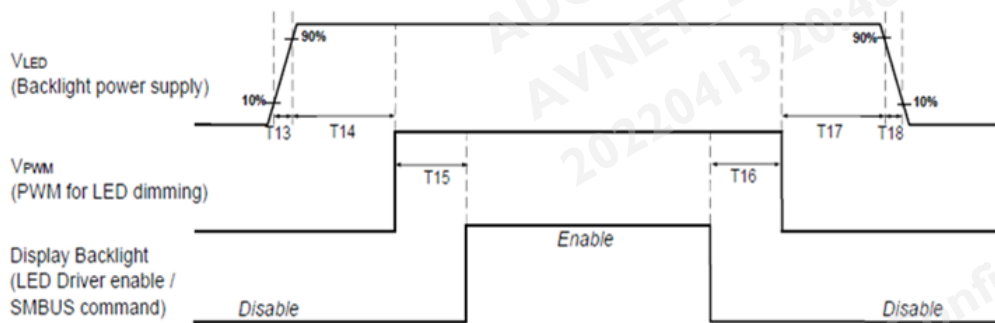

Note : When the adapter is hot plugged, the backlight power supply sequence is shown as below.

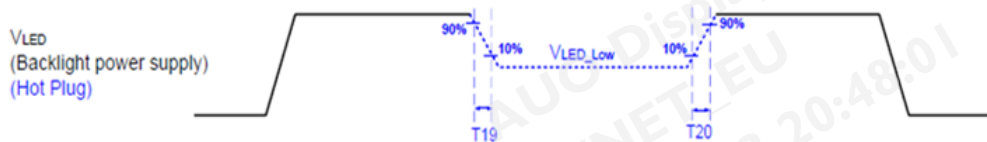

	Min (ms)	Max (ms)
T13	0.5	10
T14	10	-
T15	10	-
T16	10	-
T17	10	-
T18	0.5	10
T19	1*	-
T20	1*	-

Seamless change: $T19/T20 = 5 \times T_{PWM}^*$

* $T_{PWM} = 1/PWM \text{ Frequency}$

7. Reliability Test Criteria

7.1 Vibration Test

Test Spec:

- Test method: Non-Operation
- Acceleration: 1.5 G
- Frequency: 10 - 500Hz Random
- Sweep: 30 Minutes each Axis (X, Y, Z)

7.2 Shock Test

Test Spec:

- Test method: Non-Operation
- Acceleration: 220 G , Half sine wave
- Active time: 2ms
- Pulse: X,Y,Z .one time for each side

7.3 Reliability Test

Items	Required Condition	Note
Temperature Humidity Bias	Ta= 40℃ , 90%RH, 300h	
High Temperature Operation	Ta= 50℃ , Dry, 300h	
Low Temperature Operation	Ta= 0℃ , 300h	
High Temperature Storage	Ta= 60℃ , 35%RH, 300h	
Low Temperature Storage	Ta= -20℃ , 50%RH, 250h	
Thermal Shock Test	Ta=-20℃ to 60℃ , Duration at 30 min, 100 cycles	
ESD	Contact : ±8 KV Air : ±15 KV	Note 1

Note1: According to EN 61000-4-2, ESD class B: Some performance degradation allowed. Self-recoverable. No data lost, No hardware failures. Mura shall be ignored after high temperature reliability test.


Note2:

- Water condensation is not allowed for each test items.
- Each test is done by new TFT-LCD module. Don't use the same TFT-LCD module repeatedly for reliability test.
- The reliability test is performed only to examine the TFT-LCD module capability. No function failure occurs. Mura shall be ignored after high temperature reliability test.
- To inspect TFT-LCD module after reliability test, please store it at room temperature and room humidity for


24 hours at least in advance.

Remark: MTBF (Excluding the LED): 30,000 hours with a confidence level 90%

8.1 LCM Outline Dimension (Front View)




8.2 LCM Outline Dimension (Rear View)

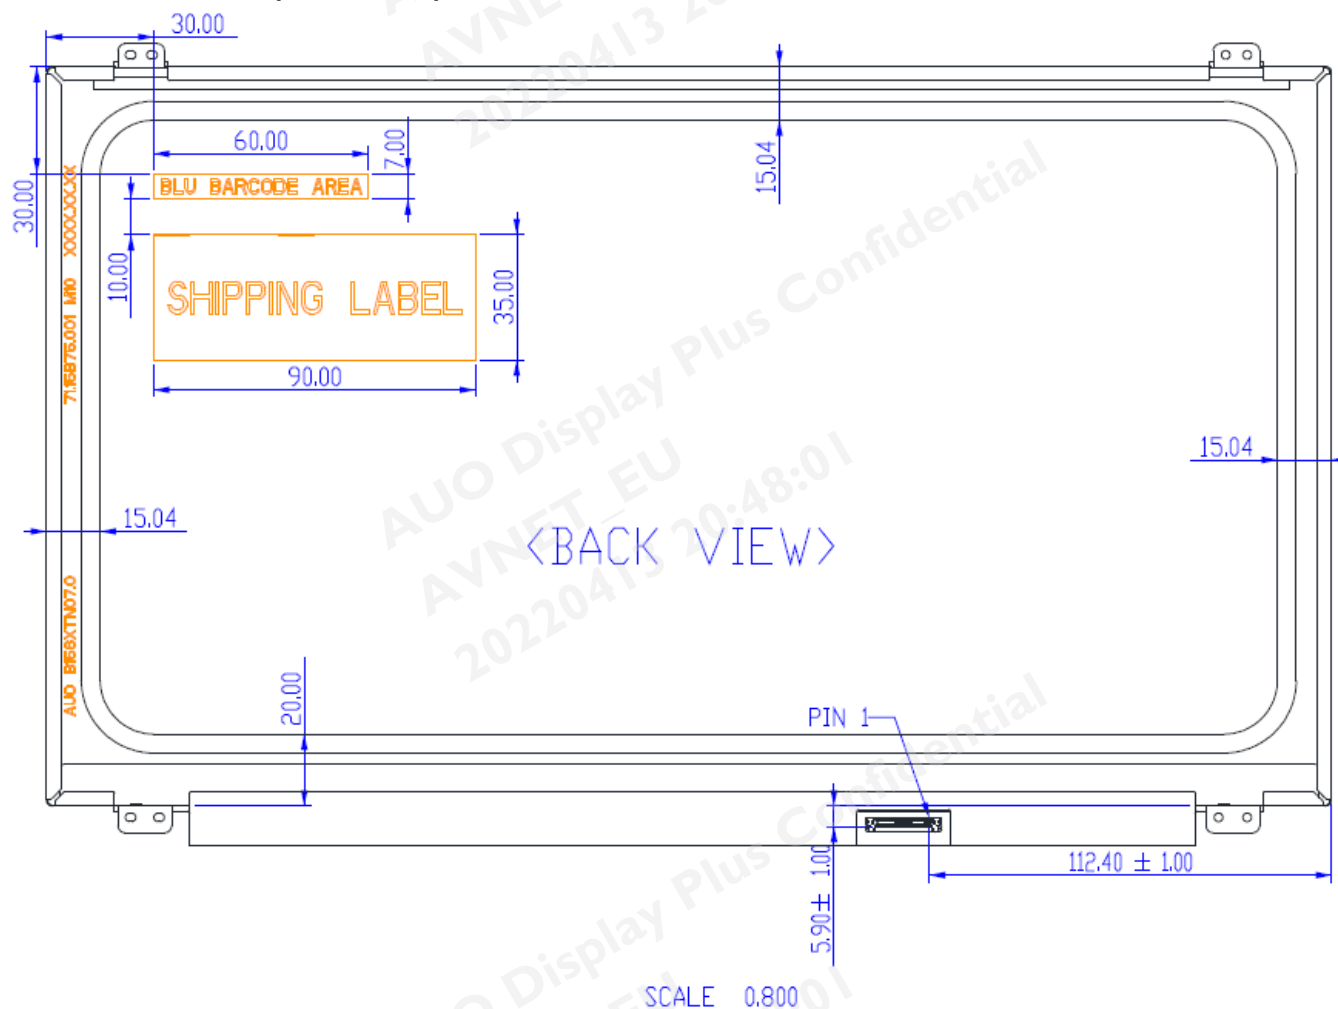

Note: Due to PCB silkscreen PIN 1 printing error, please follow spec mark

9. Label and Packaging

9.1 Shipping Label (on the rear side of TFT-LCD display)

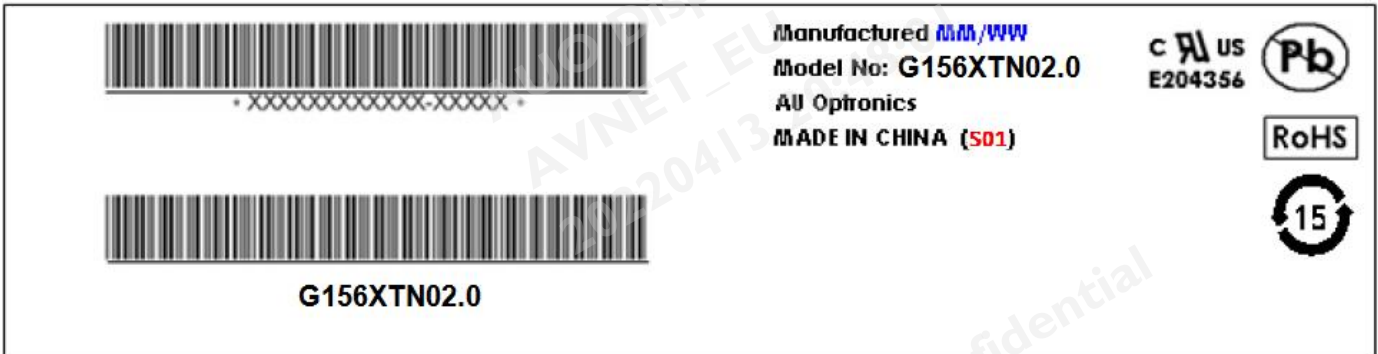



9.3 Handling guide

This is a thin and slim LCD model, and please be cautious when pulling it out of package or assembling it onto platform. Careless handlings, e.g. twist, bending, pressing, or collision, will result malfunction of LCD models.

(1) Handling method notice



Do not lift and hold the panel with single hand at right or left side from Tray.



Lift and hold the panel up with both hands from tray.

(2) On the table notice



Do not press edge of panel to avoid glass broken.



Do not press the surface of the panel to avoid the glass broken or polarizer scratch.



Do not put anything or tool on the panel to avoid the glass broken or polarizer scratch.

(3) Cable assembly notice




Do not insert the connector with single hand and touching the PCBA.



Insert the connector by pushing right and left edge.

9.4 Shipping Package of Palletizing Sequence

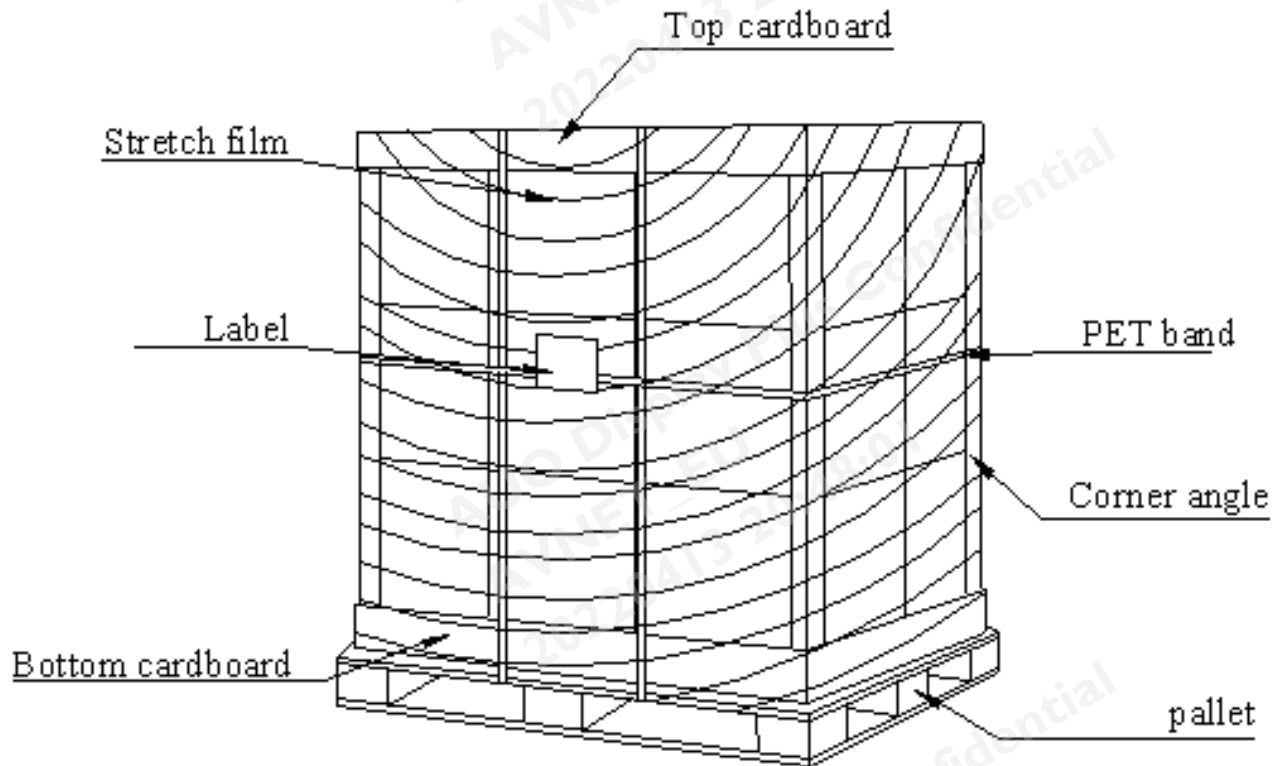



10. Appendix: EDID Description

Address	FUNCTION	Value	Value	Value	Note
HEX		HEX	BIN	DEC	
00	Header	00	00000000	0	
01		FF	11111111	255	
02		FF	11111111	255	
03		FF	11111111	255	
04		FF	11111111	255	
05		FF	11111111	255	
06		FF	11111111	255	
07		00	00000000	0	
08	EISA Manuf. Code LSB	06	00000110	6	
09	Compressed ASCII	AF	10101111	175	
0A	Product Code	EC	11101100	236	
0B	hex, LSB first	71	01110001	113	
0C	32-bit ser #	00	00000000	0	
0D		00	00000000	0	
0E		00	00000000	0	
0F		00	00000000	0	
10	Week of manufacture	16	00010110	22	
11	Year of manufacture	1A	00011010	26	
12	EDID Structure Ver.	01	00000001	1	
13	EDID revision #	04	00000100	4	
14	Video input def. (digital I/P, non-TMDS, CRGB)	95	10010101	149	
15	Max H image size (rounded to cm)	22	00100010	34	
16	Max V image size (rounded to cm)	13	00010011	19	
17	Display Gamma $(=(\gamma * 100) - 100)$	78	01111000	120	
18	Feature support (no DPMS, Active OFF, RGB, tmg Blk#1)	02	00000010	2	
19	Red/green low bits (Lower 2:2:2:2 bits)	50	01010000	80	
1A	Blue/white low bits (Lower 2:2:2:2 bits)	25	00100101	37	
1B	Red x (Upper 8 bits)	93	10010011	147	
1C	Red y/ highER 8 bits	58	01011000	88	
1D	Green x	57	01010111	87	
1E	Green y	92	10010010	146	
1F	Blue x	29	00101001	41	
20	Blue y	22	00100010	34	
21	White x	50	01010000	80	
22	White y	54	01010100	84	
23	Established timing 1	00	00000000	0	
24	Established timing 2	00	00000000	0	
25	Established timing 3	00	00000000	0	
26	Standard timing #1	01	00000001	1	
27		01	00000001	1	



Product Specification

G156XTN02.0

AU OPTRONICS CORPORATION

28	Standard timing #2	01	00000001	1	
29		01	00000001	1	
2A	Standard timing #3	01	00000001	1	
2B		01	00000001	1	
2C	Standard timing #4	01	00000001	1	
2D		01	00000001	1	
2E	Standard timing #5	01	00000001	1	
2F		01	00000001	1	
30	Standard timing #6	01	00000001	1	
31		01	00000001	1	
32	Standard timing #7	01	00000001	1	
33		01	00000001	1	
34	Standard timing #8	01	00000001	1	
35		01	00000001	1	
36	Pixel Clock/10000 LSB	CE	11001110	206	
37	Pixel Clock/10000 USB	1D	00011101	29	
38	Horz active Lower 8bits	56	01010110	86	
39	Horz blanking Lower 8bits	C0	11000000	192	
3A	HorzAct:HorzBlnk Upper 4:4 bits	50	01010000	80	
3B	Vertical Active Lower 8bits	00	00000000	0	
3C	Vertical Blanking Lower 8bits	30	00110000	48	
3D	Vert Act : Vertical Blanking (upper 4:4 bit)	30	00110000	48	
3E	HorzSync. Offset	08	00001000	8	
3F	HorzSync.Width	0A	00001010	10	
40	VertSync.Offset : VertSync.Width	31	00110001	49	
41	Horz&Vert Sync Offset/Width Upper 2bits	00	00000000	0	
42	Horizontal Image Size Lower 8bits	58	01011000	88	
43	Vertical Image Size Lower 8bits	C1	11000001	193	
44	Horizontal & Vertical Image Size (upper 4:4 bits)	10	00010000	16	
45	Horizontal Border <i>(zero for internal LCD)</i>	00	00000000	0	
46	Vertical Border <i>(zero for internal LCD)</i>	00	00000000	0	
47	Signal <i>(non-intr, norm, no stero, sep sync, neg pol)</i>	18	00011000	24	
48	Detailed timing/monitor	00	00000000	0	
49	descriptor #2	00	00000000	0	
4A		00	00000000	0	
4B		0F	00001111	15	
4C		00	00000000	0	
4D		00	00000000	0	
4E		00	00000000	0	
4F		00	00000000	0	
50		00	00000000	0	
51		00	00000000	0	
52		00	00000000	0	
53		00	00000000	0	
54		00	00000000	0	
55		00	00000000	0	



Product Specification

G156XTN02.0

AU OPTRONICS CORPORATION

56		00	00000000	0	
57		00	00000000	0	
58		00	00000000	0	
59		20	00100000	32	
5A	Detailed timing/monitor	00	00000000	0	
5B	descriptor #3	00	00000000	0	
5C		00	00000000	0	
5D		FE	11111110	254	
5E		00	00000000	0	
5F	Manufacture	41	01000001	65	A
60	Manufacture	55	01010101	85	U
61	Manufacture	4F	01001111	79	O
62		0A	00001010	10	
63		20	00100000	32	
64		20	00100000	32	
65		20	00100000	32	
66		20	00100000	32	
67		20	00100000	32	
68		20	00100000	32	
69		20	00100000	32	
6A		20	00100000	32	
6B		20	00100000	32	
6C	Detailed timing/monitor	00	00000000	0	
6D	descriptor #4	00	00000000	0	
6E		00	00000000	0	
6F		FE	11111110	254	
70		00	00000000	0	
71	Manufacture P/N	42	01000010	66	B
72	Manufacture P/N	31	00110001	49	1
73	Manufacture P/N	35	00110101	53	5
74	Manufacture P/N	36	00110110	54	6
75	Manufacture P/N	58	01011000	88	X
76	Manufacture P/N	54	01010100	84	T
77	Manufacture P/N	4E	01001110	78	N
78	Manufacture P/N	30	00110000	48	0
79	Manufacture P/N	37	00110111	55	7
7A	Manufacture P/N	2E	00101110	46	.
7B	Manufacture P/N	31	00110001	49	1
7C		20	00100000	32	
7D		0A	00001010	10	
7E	Extension Flag	00	00000000	0	
7F	Checksum	FC	11111100	252	



11. Safety

11.1 Sharp Edge Requirements

There will be no sharp edges or comers on the display assembly that could cause injury.

11.2 Materials

11.2.1 Toxicity

There will be no carcinogenic materials used anywhere in the display module. If toxic materials are used, they will be reviewed and approved by the responsible AUO toxicologist.

11.2.2 Flammability

All components including electrical components that do not meet the flammability grade UL94-V1 in the module will complete the flammability rating exception approval process.

The printed circuit board will be made from material rated 94-V1 or better. The actual UL flammability rating will be printed on the printed circuit board.

11.3 Capacitors

If any polarized capacitors are used in the display assembly, provisions will be made to keep them from being inserted backwards.

11.4 National Test Lab Requirement

The display module will satisfy all requirements for compliance to:

UL 60950-1, Second Edition

U.S.A. Information Technology Equipment